

# Dual Display Fiber Optic Amplifiers



## BFX Series CATALOG

For your safety, read and follow the considerations written in the instruction manual, other manuals and Autonics website.

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

### Features

- Dual-display for light incident level and setting value
- Enables to detect the minute object with 1/10,000 high resolution
- Enables to detect with high-speed moving object (response time 50  $\mu$ s)
- 5 response times  
: ultra fast mode (50  $\mu$ s), fast mode (150  $\mu$ s), standard mode (500  $\mu$ s), long distance mode (4 ms), ultra long distance mode (10 ms)
- Anti-saturation setting function prevents malfunction by saturated light
- External input  
: emitter OFF, remote sensitivity setting, peak reset, output ON/OFF/Keep, energy saving OFF
- Multiple sensitivity setting modes available  
: auto tuning (fine-adjusting sensitivity)  
teaching sensitivity setting (button or external input auto-tuning, 1-point, 2-point, positioning)

### Ordering Information

This is only for reference, the actual product does not support all combinations. For selecting the specified model, follow the Autonics website.

**BFX - D1 - ①**

#### ① Control output

N: NPN open collector output

P: PNP open collector output

### Product Components

- Product
- Connector cable
- Instruction manual

### Specifications

<b>Model</b>	BFX-D1-□
<b>Light source</b>	Red LED
<b>Peak emission wavelength</b>	660 nm, modulated
<b>Response time</b>	Standard (500 $\mu$ s), Long distance (4 ms), Ultra long distance (10 ms), Ultra fast (50 $\mu$ s), Fast (150 $\mu$ s) mode
<b>Sensitivity setting</b>	Manual, Teaching (Auto-tuning, 1-point, 2-point, positioning)
<b>Operation mode</b>	Light ON, Dark ON
<b>Measured value display</b>	7-segment LCD, 4-digit (decimal, percentage)
<b>Operation mode of the timer</b>	OFF, OFF Delay, ON Delay, One-shot
<b>External input</b>	Teaching sensitivity, initialization of the incident light level, emitter OFF, control output setting, energy saving mode release
<b>Indicator</b>	Operation indicator (red), display screen (PV display part: red LED, SV display part: green LED)
<b>Approval</b>	CE ENEC
<b>Unit weight (packaged)</b>	$\approx$ 16 g ( $\approx$ 115 g)
<b>Power supply</b>	12-24 VDC $\pm$ 10% (ripple P-P: $\leq$ 10%)
<b>Current consumption</b>	$\leq$ 50 mA
<b>Control output</b>	NPN open collector output / PNP open collector output model
Load voltage	$\leq$ 24 VDC $\approx$
Load current	$\leq$ 100 mA
Residual voltage	NPN: $\leq$ 1 VDC $\approx$ , PNP: $\leq$ 3 VDC $\approx$
<b>Protection circuit</b>	Reverse power protection circuit, output short overcurrent protection circuit, surge protection circuit
<b>Insulation resistance</b>	$\geq$ 20 M $\Omega$ (500 VDC $\approx$ megger)
<b>Dielectric strength</b>	1,000 VAC $\sim$ 50 / 60 Hz for 1 min
<b>Vibration</b>	1 mm double amplitude at frequency 10 to 55 Hz (for 1 min) in each X, Y, Z direction for 2 hours
<b>Shock</b>	500 m/s <sup>2</sup> ( $\approx$ 50 G) in each X, Y, Z direction for 3 times
<b>Ambient illuminance (receiver)</b>	Sunlight: $\leq$ 11,000 lx, incandescent lamp: $\leq$ 3,000 lx
<b>Ambient temperature</b> <sup>01)</sup>	-10 to 50 °C, storage: -20 to 70 °C (no freezing or condensation)
<b>Ambient humidity</b>	35 to 85%RH, storage: 35 to 85%RH (no freezing or condensation)
<b>Protection rating</b>	IP40 (IEC standard)
<b>Connection</b>	Connector cable
<b>Cable spec.</b>	$\varnothing$ 4 mm, 4-wire, 2 m
<b>Wire spec.</b>	AWG22 (0.08 mm, 60-core), insulator outer diameter: $\varnothing$ 1.25 mm
<b>Tightening torque for fiber optic unit</b>	$\geq$ 2kgf
<b>Material</b>	Case: POK, cover: PC


01) 1 to 2 units: -10 to 50 °C, 3 to 8 units: -10 to 35 °C

Be cautious about the heat transfer when the number of connected units is more than 8.


The ambient temperature varies with the number of connected amplifiers that are mounted on the DIN rail. Be sure to check the temperatures when installing in the enclosed area.

## Dimensions

- Unit: mm, For the detailed drawings, follow the Autonics website.

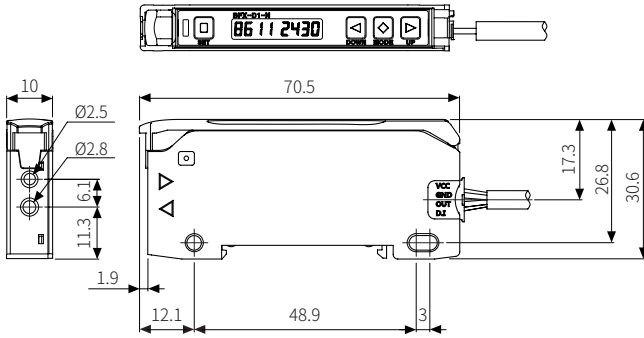

## Unit Descriptions

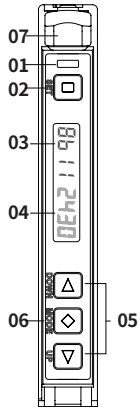

- 01. Operation indicator (red)**  
ON or OFF depending on the operation mode
- 02. [SET] key**  
Teaching sensitivity setting, incident light level monitoring
- 03. PV display part (red 4-digit LED)**  
RUN mode: it shows PV (present value).  
Setting mode: it shows the parameter.
- 04. SV display part (green 4-digit LED)**  
RUN mode: it shows SV (setting value).  
Setting mode: it shows the setting value, parameter value.
- 05. [◀] [▶] key**  
Manual sensitivity setting, selecting the setting value
- 06. [MODE] key**  
Enter mode, return to RUN mode, move parameter,  
save the setting value
- 07. Lever lock**  
It is used to fix the fiber optic unit.

## Sold Separately

- Fiber optic units