

The invisible hand for a more convenient world

Autonics sensors & controllers

Autonics
Sensors & Controllers

VER.16

SELECTION GUIDE

**SENSORS
CONTROLLERS
MOTION DEVICES**



BTF GO TO A-2

PHOTOELECTRIC SENSORS

- Ultra-thin depth of only 3.7 mm
- Minimum sensing target size: Ø0.2 mm (diffuse reflective type, BGS reflective type)
- Maximum sensing distance: 1 m (through-beam type)
- IP67 protection structure (IEC standard)



BTS GO TO A-2

PHOTOELECTRIC SENSORS

- Ultra-slim width of only 7.2 mm
- Minimum sensing target size: Ø0.15 mm (convergent reflective type)
- Maximum sensing distance: 1 m (through-beam type)
- IP67 protection structure (IEC standard)



PSAN GO TO A-48
PRESSURE SENSORS

- Applicable in various environments including gas, liquid, and oil (fluid type)
- Auto shift function allows stable output regardless of change in original pressure
- Zero-point adjustment function, peak monitoring function, chattering prevention function



E15S/E18S GO TO A-52

ROTARY ENCODERS

- Ultra-compact and lightweight (Ø15/Ø18 mm)
- Easy installation in limited spaces
- Low moment of inertia
- Power supply: 5VDC ±5%





TX GO TO B-14



TEMPERATURE CONTROLLERS

- Large LCD display with easy-to-read white PV characters
- Compact, space-saving design with 45 mm depth
- 11-segment display for higher legibility



TK4N GO TO B-2 CE cUL US


TEMPERATURE CONTROLLERS

- 50 ms high-speed sampling rate and $\pm 3\%$ display accuracy
- High performance control with simultaneous heating and cooling control and automatic / manual control mode
- Supports RS485 communication (Modbus RTU)

ATM GO TO B-52

TIMERS

- Ultra-compact, miniature size
- 4PDT contact (250 VAC, 3 A)
- Various timing ranges: 0.1 sec to 3 hr (11 available options, by model)
- Simple time setting with analog dial
- Power ON start method

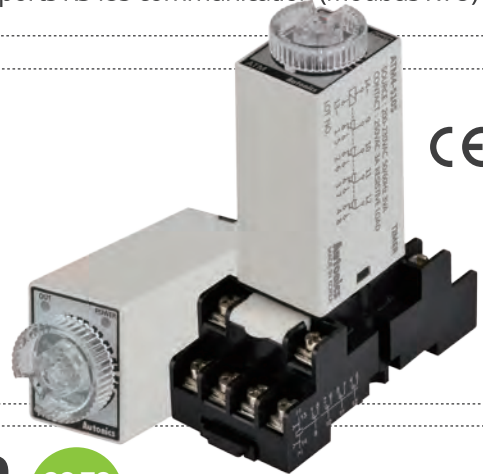

SPB GO TO B-88

SWITCHING MODE POWER SUPPLIES

- Stable power supply with minimal noise and ripple
- Slim and compact size
- High power conversion efficiency up to 92% with LLC circuit (SPB-240)
- Built-in power factor correction circuit (SPB-120/240)
- Built-in inrush current protection, output over current protection, output overvoltage protection (SPB-120/240), output short-circuit protection, overheating protection functions

DS/DA GO TO B-82

DISPLAY UNITS

- Simple connector to connector multi-stage connection (without soldering)
- Expandable up to 24 units
- Mix and match 7-segment, 16-segment, and red, green displays
- Display 64 different characters (0 to 9, 27 symbols, decimal point)




AK

STEPPER MOTORS

- Compact design and lightweight with high accuracy, speed, and torque
- Various types: shaft, hollow shaft, brake, geared, geared-brake, rotary actuator, rotary actuator-brake type
- Various frame sizes : 24, 42, 60, 85 mm

CE

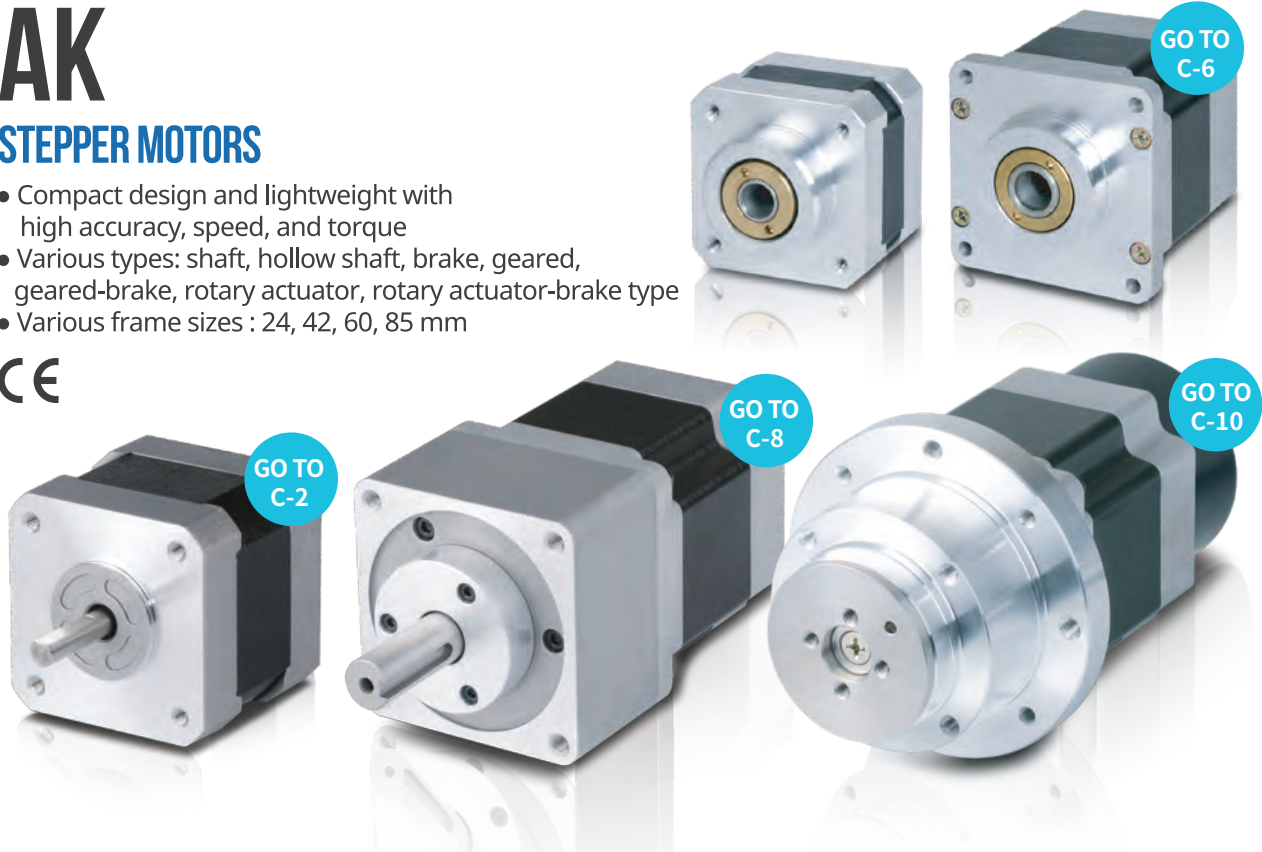

MD5

STEPPER MOTOR DRIVERS

- Bipolar constant current pentagon drive type
- Auto-current down and self-diagnosis function
- Microstep drive function (max. 250 divisions)
- Minimizes effects from external noise by photocoupler input insulation

CE



PMC-2HSP/N

MOTION CONTROLLERS

- Independent 2-axis controlling with high operating speed of up to 4Mpps
- 4 operation modes : scan, continuous, index, program mode
- Programmable up to 200 steps
- Control up to 32-axis (16 units) via RS485 serial communication (Modbus RTU)



CE

(Excepts PMC-2HSN-485, PMC-2HSP-485)

SELECTION GUIDE

SENSORS

Photoelectric Sensors	A- 2
Fiber Optic Sensors	A-18
Door / Area Sensors.....	A-24
Proximity Sensors	A-28
Pressure Sensors	A-48
Rotary Encoders	A-52
Connectors / Sockets / Sensor Distribution Boxes	A-72

CONTROLLERS


Temperature Controllers	B- 2
SSRs / Power Controllers	B-34
Counters	B-40
Timers	B-46
Panel Meters.....	B-62
Tacho / Speed / Pulse Meters	B-80
Display Units.....	B-82
Sensor Controllers	B-86
Switching Mode Power Supplies	B-88
Graphic / Logic Panels	B-90
Field Network Devices.....	B-92

MOTION DEVICES

Stepper Motors	C- 2
Stepper Motor Drivers	C-12
Motion Controllers.....	C-16

SENSORS

Photoelectric Sensors · Fiber Optic Sensors ·
Door / Area Sensors · Proximity Sensors ·
Pressure Sensors · Rotary Encoders ·
Connectors · Sockets ·
Sensor Distribution Box

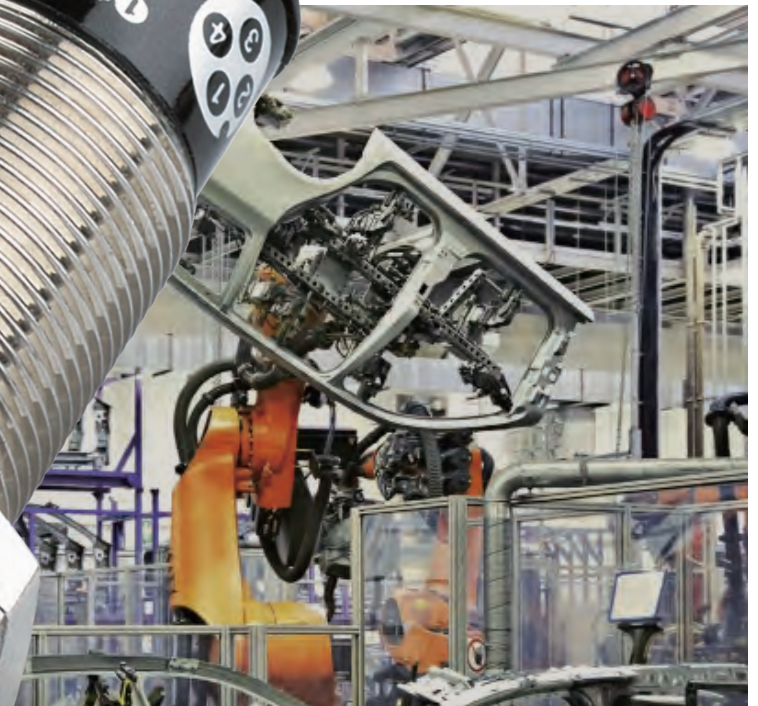

Photoelectric Sensors

Ultra Slim · Ultra Compact · Compact Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor / Compact · Slim · General-Purpose, Built-in Amplifier Type Photoelectric Sensor / Cylindrical · Cylindrical, Long Sensing Distance, One-push Mount Type Photoelectric Sensor /

Series	Sensing Type	Sensing Distance	Sensing Target	Light Source	Response Time	Power Supply	Current Consumption And Power Consumption	Sensitivity Adjustment	Operation Mode
Ultra Slim, Built-in Amplifier Type Photoelectric Sensor BTF Series <Diffuse reflective/ BGS reflective type>  Through-beam type : W13×H19×L4.6mm Diffuse reflective type/ BGS reflective type : W13×H24×L4.6mm	Through-beam type	1m	Opaque material of min. Ø2mm	Red LED (650nm)	Max. 1ms	12-24VDC	Emitter/Receiver : Max. 20mA	—	Light ON
									Dark ON
	Diffuse reflective type	5 to 30mm	Opaque, Translucent material (min. sensing target: Ø0.2mm) ^{※1}	Red LED (650nm)	Max. 1ms	12-24VDC	Max. 20mA	—	Light ON
									Dark ON
	BGS reflective type	1 to 15mm	Opaque, Translucent material (min. sensing target: non-illuminated objects of Ø0.2mm) ^{※1}	Red LED (650nm)	Max. 1ms	12-24VDC	Max. 20mA	—	Light ON
									Dark ON

※1. Based on 10mm sensing distance.

Ultra Compact, Built-in Amplifier Type Photoelectric Sensor BTS Series <Retroreflective/ Convergent reflective type>  Through-beam type : W7.2×H18.6×L9.5mm Retroreflective type/ Convergent reflective type : W7.2×H24.6×L10.8mm	Through-beam type	1m	Opaque material of min. Ø2mm	Red LED (650nm)	Max. 1ms	12-24VDC	Emitter/Receiver : Max. 20mA	—	Light ON
									Dark ON
	Retroreflective type	10 to 200mm (MS-6)	Opaque material of min. Ø27mm (min. sensing target: opaque material of Ø2mm) ^{※1}	Red LED (650nm)	Max. 1ms	12-24VDC	Max. 20mA	—	Light ON
									Dark ON
	Convergent reflective type	5 to 30mm	Opaque, Translucent material (min. sensing target: Ø0.15mm) ^{※2}	Red LED (650nm)	Max. 1ms	12-24VDC	Max. 20mA	—	Light ON
									Dark ON
5 to 15mm		Opaque, Translucent material (min. sensing target: Ø0.15mm) ^{※2}	Red LED (650nm)	Max. 1ms	12-24VDC	Max. 20mA	—	Light ON	
								Dark ON	

※1. Based on 100mm sensing distance.

※2. Based on 10mm sensing distance.

Control Output	Timer Function	Connection	Environment		Protection Structure	Approval	Model
			Ambient Illumination	Ambient Temperature			
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø2.5, 2m)	Sunlight : Max. 10,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP67	CE	BTF1M-TDTL-■
							BTF1M-TDTD-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø2.5, 2m)	Sunlight : Max. 10,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP67	CE	BTF30-DDTL-■
							BTF30-DDTD-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø2.5, 2m)	Sunlight : Max. 10,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP67	CE	BTF15-BDTL-■
							BTF15-BDTD-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø2.5, 2m)	Sunlight : Max. 10,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 55°C	IP67	CE	BTS1M-TDTL-■
							BTS1M-TDTD-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø2.5, 2m)	Sunlight : Max. 10,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 55°C	IP67	CE	BTS200-MDTL-■
							BTS200-MDTD-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø2.5, 2m)	Sunlight : Max. 10,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 55°C	IP67	CE	BTS30-LDTL-■
							BTS30-LDTD-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø2.5, 2m)	Sunlight : Max. 10,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 55°C	IP67	CE	BTS15-LDTL-■
							BTS15-LDTD-■

Photoelectric Sensors




Ultra Slim · Ultra Compact · Compact Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor /
 Compact · Slim · General-Purpose, Built-in Amplifier Type Photoelectric Sensor /
 Cylindrical · Cylindrical, Long Sensing Distance, One-push Mount Type Photoelectric Sensor /

Series	Sensing Type	Sensing Distance	Sensing Target	Light Source	Response Time	Power Supply	Current Consumption And Power Consumption	Sensitivity Adjustment	Operation Mode
Compact, Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor BJ Series <Cable type>  <Connector type>  Through-beam type/ Retroreflective type/ Diffuse reflective type/ BGS reflective type/ Narrow beam reflective type : W10.6×H32×L20mm	Through-beam type	15m	Opaque material of min. Ø12mm	Infrared LED (850nm)	Max. 1ms	12-24VDC	Emitter/Receiver : Max. 20mA	Built-in VR	Light ON/Dark ON (set by volume)
		10m	Opaque material of min. Ø12mm	Red LED (660nm)					
		7m	Opaque material of min. Ø8mm	Red LED (650nm)					
	Retroreflective type (built-in polarizing filter)	0.1 to 3m (MS-2A)	Opaque material of min. Ø75mm	Red LED (660nm)	Max. 1ms	12-24VDC	Max. 30mA	Built-in VR	Light ON/Dark ON (set by volume)
	Diffuse reflective type	1m	Opaque, Translucent material	Infrared LED (850nm)	Max. 1ms	12-24VDC	Max. 30mA	Built-in VR	Light ON/Dark ON (set by volume)
		300mm	Opaque, Translucent material	Red LED (660nm)					
		100mm	Opaque, Translucent material	Infrared LED (850nm)					
		30mm	Opaque, Translucent material	Infrared LED (850nm)	Max. 1ms	12-24VDC	Max. 30mA	—	Light ON
		15mm	Translucent material (glass)						
	BGS reflective type	10 to 30mm	Opaque, Translucent material	Red LED (660nm)	Max. 1.5ms	12-24VDC	Max. 30mA	Built-in VR	Light ON/Dark ON (set by volume)
		10 to 50mm							
	Narrow beam reflective type	30 to 70mm	Opaque, Translucent material (min. sensing target: min. Ø0.2mm (copper wire))	Red LED (650nm)	Max. 1.5ms	12-24VDC	Max. 30mA	Built-in VR	Light ON/Dark ON (set by volume)
		70 to 130mm							

Control Output	Timer Function	Connection	Environment		Protection Structure	Approval	Model
			Ambient Illumination	Ambient Temperature			
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP65 (connector type: IP67)	CE	BJ15M-TDT-■
		Connector type (M8)					BJ15M-TDT-C-■
		Cable type (Ø3.5, 2m)					BJ10M-TDT-■
		Connector type (M8)					BJ10M-TDT-C-■
		Cable type (Ø3.5, 2m)					BJ7M-TDT-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP65 (connector type: IP67)	CE	BJ3M-PDT-■
		Connector type (M8)					BJ3M-PDT-C-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP65 (connector type: IP67)	CE	BJ1M-DDT-■
		Connector type (M8)					BJ1M-DDT-C-■
		Cable type (Ø3.5, 2m)					BJ300-DDT-■
		Connector type (M8)					BJ300-DDT-C-■
		Cable type (Ø3.5, 2m)					BJ100-DDT-■
		Connector type (M8)					BJ100-DDT-C-■
NPN open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP65	CE	BJG30-DDT
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP65	CE	BJ30-BDT-■
							BJ50-BDT-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP65	CE	BJN50-NDT-■
							BJN100-NDT-■

Photoelectric Sensors

Ultra Slim · Ultra Compact · Compact Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor / Compact · Slim · General-Purpose, Built-in Amplifier Type Photoelectric Sensor / Cylindrical · Cylindrical, Long Sensing Distance, One-push Mount Type Photoelectric Sensor /

Series	Sensing Type	Sensing Distance	Sensing Target	Light Source	Response Time	Power Supply	Current Consumption And Power Consumption	Sensitivity Adjustment	Operation Mode
Photomicro Sensor BS5 Series  <p><Cable type></p> <p>① T type: W25×H13.5×L22.2mm ② L type: W26.5×H15.4×L16.3mm ③ K type: W25×H6.6×L27.6mm ④ V type: W13.5×H13×L27.6mm ⑤ Y type: W13.5×H15.4×L20mm</p>  <p><Connector type></p> <p>① T type: W25×H13.5×L22.2mm ② L type: W26.6×H15.4×L13.3mm ③ K type: W25×H6.6×L27.6mm ④ V type: W13.5×H13×L27.6mm ⑤ Y type: W13.5×H15.4×L20mm</p>	Through-beam type (not-modulated)	5mm fixed	Opaque material of min. Ø0.8×2mm	Infrared LED (940nm)	Light ON : Max. 20µs, Dark ON : Max. 100µs	5-24VDC	Max. 30mA	—	Light ON/Dark ON (set by control wire)
	Through-beam type (not-modulated)	5mm fixed	Opaque material of min. Ø0.8×2mm	Infrared LED (940nm)	Light ON : Max. 20µs, Dark ON : Max. 100µs	5-24VDC	Max. 30mA	—	Light ON/Dark ON (set by control wire)
	Through-beam type (not-modulated)	5mm fixed	Opaque material of min. Ø0.8×2mm	Infrared LED (940nm)	Light ON : Max. 20µs, Dark ON : Max. 100µs	5-24VDC	Max. 30mA	—	Light ON/Dark ON (set by control terminal block)
	Through-beam type (not-modulated)	5mm fixed	Opaque material of min. Ø0.8×2mm	Infrared LED (940nm)	Light ON : Max. 20µs, Dark ON : Max. 100µs	5-24VDC	Max. 30mA	—	Light ON/Dark ON (set by control terminal block)
※ Sold separately for connector type: Connector (CT-01), Connector cable (CT-02, 1m)									
Long Sensing Distance, Diffuse Reflective Type Photoelectric Sensor BA Series  <p>W19×H15.5×L48.5mm</p>	Diffuse reflective type	2m	Opaque, Translucent material	Infrared LED (850nm)	Max. 1ms	12-24VDC	Max. 15mA	Built-in VR	Light ON Dark ON Light ON Dark ON

Control Output	Timer Function	Connection	Environment		Protection Structure	Approval	Model
			Ambient Illumination	Ambient Temperature			
NPN open collector	—	Cable type (Ø3, 1m)	Fluorescent lamp : Max. 1,000lx (received illumination)	-20 to 55°C	IP50	CE	BS5-K1M
							BS5-T1M
							BS5-L1M
							BS5-Y1M
							BS5-V1M
PNP open collector	—	Cable type (Ø3, 1m)	Fluorescent lamp : Max. 1,000lx (received illumination)	-20 to 55°C	IP50	CE	BS5-K1M-P
							BS5-T1M-P
							BS5-L1M-P
							BS5-Y1M-P
							BS5-V1M-P
NPN open collector	—	Connector type	Fluorescent lamp : Max. 1,000lx (received illumination)	-20 to 55°C	IP50	CE	BS5-K2M
							BS5-T2M
							BS5-L2M
							BS5-Y2M
							BS5-V2M
PNP open collector	—	Connector type	Fluorescent lamp : Max. 1,000lx (received illumination)	-20 to 55°C	IP50	CE	BS5-K2M-P
							BS5-T2M-P
							BS5-L2M-P
							BS5-Y2M-P
							BS5-V2M-P
NPN open collector	—	Cable type (Ø3, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP64	CE	BA2M-DDT
							BA2M-DDTD
PNP open collector	—	Cable type (Ø3, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 55°C	IP64	CE	BA2M-DDT-P
							BA2M-DDTD-P

Photoelectric Sensors

Ultra Slim · Ultra Compact · Compact Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor / Compact · Slim · General-Purpose, Built-in Amplifier Type Photoelectric Sensor / Cylindrical · Cylindrical, Long Sensing Distance, One-push Mount Type Photoelectric Sensor /

Series	Sensing Type	Sensing Distance	Sensing Target	Light Source	Response Time	Power Supply	Current Consumption And Power Consumption	Sensitivity Adjustment	Operation Mode
Compact, Built-in Amplifier Type Photoelectric Sensor BY Series <Through-beam type (standard type)>  <Through-beam type (side sensing type)>  Standard type : W12×H16×L30mm Side sensing type : W12×H30×L16mm	Through-beam type (standard type)	500mm	Opaque material of min. Ø5mm	Infrared LED (940nm)	Max. 1ms	12-24VDC	Emitter/ Receiver : Max. 30mA	—	Dark ON
	Through-beam type (side sensing type)	500mm	Opaque material of min. Ø5mm	Infrared LED (940nm)	Max. 1ms	12-24VDC	Emitter/ Receiver : Max. 30mA	—	Dark ON
Compact, Built-in Amplifier Type Photoelectric Sensor BYD Series <Through-beam type>  Through-beam type/ Diffuse reflective type/ Convergent reflective type : W12×H32×L18mm	Through-beam type	3m	Opaque material of min. Ø6mm	Infrared LED	Max. 1ms	12-24VDC	Emitter/ Receiver : Max. 30mA	Fixed	Dark ON (option: Light ON)
	Diffuse reflective type	100mm	Opaque, Translucent material	Infrared LED	Operation : Max. 3ms, Return : Max. 100ms	12-24VDC	Max. 35mA	Built-in VR	Light ON
	Convergent reflective type	10 to 30mm	Opaque, Translucent material	Infrared LED	Operation : Max. 3ms, Return : Max. 100ms (in case of minimal VR setting)	12-24VDC	Max. 35mA	Fixed	Light ON
		10 to 50mm	Opaque, Translucent material	Infrared LED	Operation : Max. 3ms, Return : Max. 100ms (in case of minimal VR setting)	12-24VDC	Max. 35mA	Fixed	Light ON

Control Output	Timer Function	Connection	Environment		Protection Structure	Approval	Model
			Ambient Illumination	Ambient Temperature			
NPN open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP50	CE	BY500-TDT
NPN open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP50	CE	BYS500-TDT
NPN open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP64	CE	BYD3M-TDT
PNP open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP64	CE	BYD3M-TDT-P
NPN open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP50	CE	BYD100-DDT
NPN open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP64	CE	BYD30-DDT
					IP50	CE	BYD30-DDT-U (with upper operation indicator)
NPN open collector	●	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP50	CE	BYD30-DDT-T
					IP64	CE	BYD50-DDT
NPN open collector	—	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP64	CE	BYD50-DDT
					IP50	CE	BYD50-DDT-U (with upper operation indicator)
NPN open collector	●	Cable type (Ø3.5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP50	CE	BYD50-DDT-T

Photoelectric Sensors

Ultra Slim · Ultra Compact · Compact Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor / Compact · Slim · General-Purpose, Built-in Amplifier Type Photoelectric Sensor / Cylindrical · Cylindrical, Long Sensing Distance, One-push Mount Type Photoelectric Sensor /

Series	Sensing Type	Sensing Distance	Sensing Target	Light Source	Response Time	Power Supply	Current Consumption And Power Consumption	Sensitivity Adjustment	Operation Mode
Slim, Built-in Amplifier Type Photoelectric Sensor BPS Series  W16×H7.5×L28mm	Through-beam type	3m	Opaque material of min. Ø5mm	Infrared LED (850nm)	Max. 1ms	12-24VDC	Emitter/ Receiver : Max. 20mA	Built-in VR	Dark ON
									Light ON
									Dark ON
									Light ON
General-Purpose, Built-in Amplifier Type Photoelectric Sensor BM Series <Through-beam type>  Through-beam type/ Retroreflective type/ Diffuse reflective type : W16×H28.4×L51.5mm	Through-beam type	3m	Opaque material of min. Ø8mm	Infrared LED (940nm)	Max. 3ms	12-24VDC	Emitter/ Receiver : Max. 45mA	Fixed	Dark ON
	Retroreflective type	0.1 to 1m (MS-2)	Opaque material of min. Ø60mm	Infrared LED (940nm)	Max. 3ms	12-24VDC	Max. 40mA	Fixed	Dark ON
	Diffuse reflective type	200mm	Opaque, Translucent material, Transparent material	Infrared LED (940nm)	Max. 3ms	12-24VDC	Max. 40mA	Built-in VR	Light ON (option: Dark ON)
Side Sensing Type Photoelectric Sensor BMS Series <Through-beam type>  Through-beam/ Retroreflective/ Diffuse reflective type : W16×H55×L29mm	Through-beam type	5m	Opaque material of min. Ø10mm	Infrared LED (940nm)	Max. 1ms	12-24VDC	Emitter/ Receiver : Max. 50mA	—	Light ON/Dark ON (set by control wire)
	Retroreflective type	0.1 to 2m (MS-2)	Opaque material of min. Ø60mm	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)
	Diffuse reflective type	300mm	Opaque, Translucent material	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)

Control Output	Timer Function	Connection	Environment		Protection Structure	Approval	Model
			Ambient Illumination	Ambient Temperature			
NPN open collector	—	Cable type (Ø3, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP67	CE	BPS3M-TDT
NPN open collector	—	Cable type (Ø3, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP67	CE	BPS3M-TDTL
PNP open collector	—	Cable type (Ø3, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP67	CE	BPS3M-TDT-P
PNP open collector	—	Cable type (Ø3, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP67	CE	BPS3M-TDTL-P
NPN open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	—	CE	BM3M-TDT
NPN open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	—	CE	BM1M-MDT
NPN open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	—	CE	BM200-DDT
NPN open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	—	CE	BMS5M-TDT
PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	—	CE	BMS5M-TDT-P
NPN open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	—	CE	BMS2M-MDT
PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	—	CE	BMS2M-MDT-P
NPN open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	—	CE	BMS300-DDT
PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	—	CE	BMS300-DDT-P

Photoelectric Sensors





Ultra Slim · Ultra Compact · Compact Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor /
 Compact · Slim · General-Purpose, Built-in Amplifier Type Photoelectric Sensor /
 Cylindrical · Cylindrical, Long Sensing Distance, One-push Mount Type Photoelectric Sensor /

Series	Sensing Type	Sensing Distance	Sensing Target	Light Source	Response Time	Power Supply	Current Consumption And Power Consumption	Sensitivity Adjustment	Operation Mode	
AC/DC, Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor BEN Series <Diffuse reflective type>  Through-beam type/ Retroreflective type/ Diffuse reflective type : W18×H50×L50mm	Through-beam type	10m	Opaque material of min. Ø16mm	Infrared LED (850nm)	Max. 1ms	12-24VDC	Emitter/Receiver : Max. 50mA	—	Light ON/Dark ON (set by volume)	
					Max. 20ms	24-240VAC 24-240VDC	Emitter/Receiver : Max. 4VA			
	Retroreflective type (standard type)	0.1 to 5m (MS-2)	Opaque material of min. Ø60mm	Infrared LED (850nm)	Max. 1ms	12-24VDC	Max. 50mA	Built-in VR	Light ON/Dark ON (set by volume)	
					Max. 20ms	24-240VAC 24-240VDC	Max. 4VA			
	Retroreflective type (built-in polarizing filter)	0.1 to 3m (MS-2)	Opaque material of min. Ø60mm	Red LED (660nm)	Max. 1ms	12-24VDC	Max. 50mA	Built-in VR	Light ON/Dark ON (set by volume)	
					Max. 20ms	24-240VAC 24-240VDC	Max. 4VA			
	Diffuse reflective type	300mm	Opaque, Translucent material	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 50mA	Built-in VR	Light ON/Dark ON (set by volume)	
					Max. 20ms	24-240VAC 24-240VDC	Max. 4VA			
	AC/DC, Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor BX Series <Diffuse reflective type>  Through-beam type/ Retroreflective type/ Diffuse reflective type : W25×H68×L80mm	Through-beam type	15m	Opaque material of min. Ø15mm	Infrared LED (850nm)	Max. 1ms	12-24VDC	Emitter/Receiver : Max. 50mA	Built-in VR	Light ON/Dark ON (set by switch)
						Max. 20ms	24-240VAC 24-240VDC	Emitter/Receiver : Max. 3VA		
		Retroreflective type (standard type)	0.1 to 5m (MS-2)	Opaque material of min. Ø60mm	Infrared LED (850nm)	Max. 1ms	12-24VDC	Max. 50mA	Built-in VR	Light ON/Dark ON (set by switch)
						Max. 20ms	24-240VAC 24-240VDC	Max. 3VA		
Retroreflective type (built-in polarizing filter)		0.1 to 2m (MS-2) 0.1 to 3m (MS-3)	Opaque material of min. Ø60mm	Red LED (660nm)	Max. 1ms	12-24VDC	Max. 50mA	Built-in VR	Light ON/Dark ON (set by switch)	
					Max. 20ms	24-240VAC 24-240VDC	Max. 3VA			
Diffuse reflective type		700mm	Opaque, Translucent material	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 50mA	Built-in VR	Light ON/Dark ON (set by switch)	
					Max. 20ms	24-240VAC 24-240VDC	Max. 3VA			
Cylindrical Type Photoelectric Sensor BR Series <Cable type>  <Connector type>  Through-beam type/ Retroreflective type/ Diffuse reflective type/ Narrow beam reflective type : Ø18, L74mm		Through-beam type	4m	Opaque material of min. Ø15mm	Infrared LED (850nm)	Max. 1ms	12-24VDC	Emitter/Receiver : Max. 45mA	Fixed	Dark ON
										Light ON
			20m	Opaque material of min. Ø15mm	Infrared LED (850nm)	Max. 1ms	12-24VDC	Emitter/Receiver : Max. 45mA	Fixed	Dark ON
										Light ON
	Retroreflective type	0.1 to 3m (MS-2)	Opaque material of min. Ø60mm	Red LED (660nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)	
	Diffuse reflective type	100mm	Opaque, Translucent material	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)	
		400mm	Opaque, Translucent material	Infrared LED (850nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)	
	Narrow beam reflective type	200mm	Opaque, Translucent material	Infrared LED (850nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)	

Control Output	Timer Function	Connection	Environment		Protection Structure	Approval	Model
			Ambient Illumination	Ambient Temperature			
NPN, PNP open collector simultaneous output	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP50	CE	BEN10M-TDT
Relay	—						BEN10M-TFR
NPN, PNP open collector simultaneous output	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP50	CE	BEN5M-MDT
Relay	—						BEN5M-MFR
NPN, PNP open collector simultaneous output	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP50	CE	BEN3M-PDT
Relay	—						BEN3M-PFR
NPN, PNP open collector simultaneous output	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 65°C	IP50	CE	BEN300-DDT
Relay	—						BEN300-DFR
NPN, PNP open collector simultaneous output	— ●	Terminal block type	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 55°C	IP66	CE	BX15M-TDT
Relay	— ●						BX15M-TDT-T
							BX15M-TFR
							BX15M-TFR-T
NPN, PNP open collector simultaneous output	— ●	Terminal block type	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 55°C	IP66	CE	BX5M-MDT
Relay	— ●						BX5M-MDT-T
							BX5M-MFR
							BX5M-MFR-T
NPN, PNP open collector simultaneous output	— ●	Terminal block type	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 55°C	IP66	CE	BX3M-PDT
Relay	— ●						BX3M-PDT-T
							BX3M-PFR
							BX3M-PFR-T
NPN, PNP open collector simultaneous output	— ●	Terminal block type	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-20 to 55°C	IP66	CE	BX700-DDT
Relay	— ●						BX700-DDT-T
							BX700-DFR
							BX700-DFR-T
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP66	CE	BR4M-TDTD-■
		Connector type (M12)					BR4M-TDTD-C-■
		Cable type (Ø5, 2m)					BR4M-TDTL-■
		Connector type (M12)					BR4M-TDTL-C-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP67	CE	BR20M-TDTD-■
		Connector type (M12)					BR20M-TDTD-C-■
		Cable type (Ø5, 2m)					BR20M-TDTL-■
		Connector type (M12)					BR20M-TDTL-C-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP66	CE	BR3M-MDT-■
		Connector type (M12)					BR3M-MDT-C-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP66	CE	BR100-DDT-■
		Connector type (M12)					BR100-DDT-C-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP66	CE	BR400-DDT-■
		Connector type (M12)					BR400-DDT-C-■
■: Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP66	CE	BR200-DDTN-■
		Connector type (M12)					BR200-DDTN-C-■

Photoelectric Sensors


Ultra Slim · Ultra Compact · Compact Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor / Compact · Slim · General-Purpose, Built-in Amplifier Type Photoelectric Sensor / Cylindrical · Cylindrical, Long Sensing Distance, One-push Mount Type Photoelectric Sensor /

Series	Sensing Type	Sensing Distance	Sensing Target	Light Source	Response Time	Power Supply	Current Consumption And Power Consumption	Sensitivity Adjustment	Operation Mode
Cylindrical Type Photoelectric Sensor (Plastic) BRP Series <Cable type>  <Connector type>  Retroreflective type/ Diffuse reflective type/ Narrow beam reflective type : Ø18, L74mm	Retroreflective type	0.1 to 3m (MS-2)	Opaque material of min. Ø60mm	Red LED (660nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)
	Diffuse reflective type	100mm	Opaque, Translucent material	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)
		400mm	Opaque, Translucent material	Infrared LED (850nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)
	Narrow beam reflective type	200mm	Opaque, Translucent material	Infrared LED (850nm)	Max. 1ms	12-24VDC	Max. 45mA	Built-in VR	Light ON/Dark ON (set by control wire)
U-Shaped Type Photoelectric Sensor BUP Series <BUP30>  <BUP50>  BUP30: W52×H20×L72mm BUP50: W78.5×H20×L78.1mm	Through-beam type	30mm	Opaque material of min. Ø4mm	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 30mA	Fixed	Light ON/Dark ON (set by control wire)
			Opaque material of min. Ø1.5mm	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 30mA	Built-in VR	Light ON/Dark ON (set by control wire)
		50mm	Opaque material of min. Ø4mm	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 30mA	Fixed	Light ON/Dark ON (set by control wire)
			Opaque material of min. Ø1.5mm	Infrared LED (940nm)	Max. 1ms	12-24VDC	Max. 30mA	Built-in VR	Light ON/Dark ON (set by control wire)


Control Output	Timer Function	Connection	Environment		Protection Structure	Approval	Model
			Ambient Illumination	Ambient Temperature			
■: Control Output Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP66	CE	BRP3M-MDT-■
		Connector type (M12)					BRP3M-MDT-C-■
■: Control Output Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP66	CE	BRP100-DDT-■
		Connector type (M12)					BRP100-DDT-C-■
■: Control Output Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP66	CE	BRP400-DDT-■
		Connector type (M12)					BRP400-DDT-C-■
■: Control Output Type No-mark: NPN open collector P: PNP open collector	—	Cable type (Ø5, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 60°C	IP66	CE	BRP200-DDTN-■
		Connector type (M12)					BRP200-DDTN-C-■
NPN open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP66	CE	BUP-30
PNP open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP66	CE	BUP-30-P
NPN open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP66	CE	BUP-30S
PNP open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP66	CE	BUP-30S-P
NPN open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP66	CE	BUP-50
PNP open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP66	CE	BUP-50-P
NPN open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP66	CE	BUP-50S
PNP open collector	—	Cable type (Ø4, 2m)	Sunlight : Max. 11,000lx, Incandescent lamp : Max. 3,000lx (received illumination)	-25 to 65°C	IP66	CE	BUP-50S-P

Photoelectric Sensors


Ultra Slim · Ultra Compact · Compact Long Sensing Distance, Built-in Amplifier Type Photoelectric Sensor / Compact · Slim · General-Purpose, Built-in Amplifier Type Photoelectric Sensor / Cylindrical · Cylindrical, Long Sensing Distance, One-push Mount Type Photoelectric Sensor /

Series	Operation Method	Button Operation			Light Source	Power Supply	Current Consumption	Operation Load
		Stop Position	Output Switching Position	Operation Limit Position				
Push Button Type Photomicro Sensor BS5-P Series  W20×H14×L25mm	Push button type ^{※1}	5.0±0.4mm	4.0±0.5mm	Max. 0mm	Infrared LED (940nm)	12-24VDC Max. 35mA	Max. 3N (max. 0.3kgf)	

※1. Detection occurs when the button is pushed and the light source is blocked.

Series	Sensing Type	Applicable Pipe	Standard Sensing Target	Light Source	Response Time	Power Supply	Current Consumption
Liquid Level Sensor BL Series  W23×H14×L13mm	Through-beam type	Using binding band : Ø6 to 13mm, Using protection bracket : Ø12.7mm (1/2 inch) transparent pipe in 1mm thickness (FEP (fluoroplastic) or with equivalent transparency)	Liquid in a pipe ^{※1}	Infrared LED (950nm)	Max. 2ms	12-24VDC	Max. 30mA

※1. The unit may not detect the liquid with low transparent, with high viscosity, or with floating matters.

Series	Size	Applied Sensor
Retroreflective Tape MST Series 	50×50mm	Retroreflective type: BM1M-MDT, BMS2M-MDT-□, BR3M-MDT-□-□, BEN5M-MDT, BEN5M-MFR, BX5M-MDT, BX5M-MDT-T, BX5M-MFR, BX5M-MFR-T, BTS200-MDT-□-□ Retroreflective type (built-in polarizing filter): BJ3M-PDT-□-□, BEN3M-PDT, BEN3M-PFR, BX3M-PDT-□, BX3M-PFR-□
	100×100mm	
	200×200mm	


Operation Mode	Control Output	Connection	Environment		Protection Structure	Approval	Model
			Ambient Illumination	Ambient Temperature			
Light ON (output OFF when button is pushed)	NPN open collector	Cable type (Ø3, 1m)	Fluorescent lamp : Max. 1,000lx (received illumination)	-20 to 55°C	IP40	CE	BS5-P1ML
	PNP open collector	Cable type (Ø3, 1m)	Fluorescent lamp : Max. 1,000lx (received illumination)	-20 to 55°C	IP40	CE	BS5-P1ML-P
Dark ON (output ON when button is pushed)	NPN open collector	Cable type (Ø3, 1m)	Fluorescent lamp : Max. 1,000lx (received illumination)	-20 to 55°C	IP40	CE	BS5-P1MD
	PNP open collector	Cable type (Ø3, 1m)	Fluorescent lamp : Max. 1,000lx (received illumination)	-20 to 55°C	IP40	CE	BS5-P1MD-P


Operation Mode	Control Output	Connection	Environment		Protection Structure	Approval	Model
			Ambient Illumination	Ambient Temperature			
Light ON/Dark ON (set by button)	NPN open collector	Cable type (Ø2.5, 1m)	Sunlight/ Incandescent lamp : Max. 3,000lx for each (received illumination)	10 to 55°C	IP64	CE	BL13-TDT
	PNP open collector	Cable type (Ø2.5, 1m)	Sunlight/ Incandescent lamp : Max. 3,000lx for each (received illumination)	10 to 55°C	IP64	CE	BL13-TDT-P

Material	Ambient Temperature	Packing Unit	Model
Surface film: Polymethyl methacrylate Prism layer: Polycarbonate Adhesive layer: Acrylic	-35 to 65°C (attachment temperature: 10 to 30°C)	10	MST-50-10
		5	MST-100-5
		2	MST-200-2


Fiber Optic Sensors

Digital Display, Fiber Optic Amplifier / High Performance, Fiber Optic Amplifier /

Series	Type	Light Source	Response Time	Power Supply	Current Consumption	Operation Mode	Control Output
Digital Display, Fiber Optic Amplifier BF5 Series <BF5-D>  W10×H30×L70mm <BF5-S>  W10×H30×L70mm	Dual display	Red LED (660nm)	50μs, 150μs, 500μs, 4ms, 10ms	12-24VDC	Max. 50mA	Light ON/Dark ON (set by parameter)	NPN open collector
		Green LED (530nm)	50μs, 150μs, 500μs, 4ms, 10ms	12-24VDC	Max. 50mA	Light ON/Dark ON (set by parameter)	PNP open collector
		Blue LED (470nm)	50μs, 150μs, 500μs, 4ms, 10ms	12-24VDC	Max. 50mA	Light ON/Dark ON (set by parameter)	NPN open collector
	Single display	Red LED (660nm)	150μs, 500μs, 4ms	12-24VDC	Max. 50mA	Light ON/Dark ON (set by parameter)	NPN open collector
							PNP open collector

High Performance, Fiber Optic Amplifier BF4 Series  W12×H32.8×L62mm	Standard type	Red LED (660nm)	Frequency 1 : Max. 0.5ms Frequency 2 : Max. 0.7ms	12-24VDC	Max. 45mA	Light ON/Dark ON (set by ON/OFF button)	NPN open collector
		Green LED (525nm)	Frequency 1 : Max. 0.5ms Frequency 2 : Max. 0.7ms	12-24VDC	Max. 45mA	Light ON/Dark ON (set by ON/OFF button)	PNP open collector
	External synchro. type	Red LED (660nm)	Frequency 1 : Max. 0.5ms Frequency 2 : Max. 0.7ms	12-24VDC	Max. 45mA	Light ON/Dark ON (set by ON/OFF button)	NPN open collector
		Green LED (525nm)	Frequency 1 : Max. 0.5ms Frequency 2 : Max. 0.7ms	12-24VDC	Max. 45mA	Light ON/Dark ON (set by ON/OFF button)	PNP open collector
	External input sensitivity setting type	Red LED (660nm)	Frequency 1 : Max. 0.5ms Frequency 2 : Max. 0.7ms	12-24VDC	Max. 45mA	Light ON/Dark ON (set by ON/OFF button)	NPN open collector
		Green LED (525nm)	Frequency 1 : Max. 0.5ms Frequency 2 : Max. 0.7ms	12-24VDC	Max. 45mA	Light ON/Dark ON (set by ON/OFF button)	PNP open collector

General-Purpose, Fiber Optic Amplifier BF3 Series  W15×H38.9×L69.1mm	Built-in twin volume type	Red LED (660nm)	Max. 1ms	12-24VDC	Max. 40mA	Light ON/Dark ON (set by control wire)	NPN open collector
							PNP open collector

Series	Type	Power Supply	Communication	Communication Speed	Input
Communication Converter for Fiber Optic Amplifier BFC Series ^{※1}  W10×H30×L70mm	Communication converter for fiber optic amplifier	12-24VDC ^{※2}	RS485 communication, Serial communication, SW input	1200, 2400, 4800, 9600, 19200, 38400bps	NPN solid-state
					PNP solid-state

※1. BFC is communication converter only for fiber optic amplifier, BF5 Series.













※2. BFC power is from the connected amplifier unit via side connector.

Timer Function	Sensitivity Setting	Environment		Protection Structure	Approval	Model
		Ambient Illumination	Ambient Temperature			
OFF, OFF Delay, ON Delay, One-shot (1 to 5000ms)	Manual sensitivity setting Teaching sensitivity setting (auto-tuning, 1-point, 2-point, positioning)	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000 (received illumination)	-10 to 50°C	IP40	CE	BF5R-D1-N
						BF5R-D1-P
OFF, OFF Delay, ON Delay, One-shot (1 to 5000ms)	Manual sensitivity setting Teaching sensitivity setting (auto-tuning, 1-point, 2-point, positioning)	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 50°C	IP40	CE	BF5G-D1-N
						BF5G-D1-P
OFF, OFF Delay, ON Delay, One-shot (1 to 5000ms)	Manual sensitivity setting Teaching sensitivity setting (auto-tuning, 1-point, 2-point, positioning)	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 50°C	IP40	CE	BF5B-D1-N
						BF5B-D1-P
OFF, OFF Delay (10ms, 40ms)	Manual sensitivity setting Teaching sensitivity setting (auto-tuning)	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 50°C	IP40	CE	BF5R-S1-N
						BF5R-S1-P
OFF Delay (40ms)	Manual sensitivity setting	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 50°C	—	CE	BF4R
						BF4RP
OFF Delay (40ms)	Manual sensitivity setting	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 50°C	—	CE	BF4G
						BF4GP
—	Manual sensitivity setting	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 50°C	—	CE	BF4R-E
						BF4G-E
OFF Delay (40ms)	Manual sensitivity setting External input sensitivity setting (SW1, SW2)	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 50°C	—	CE	BF4R-R
						BF4G-R
—	Built-in VR (coarse adjustment, fine adjustment)	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 50°C	—	—	BF3RX
—	Built-in VR (coarse adjustment, fine adjustment)	Sunlight : Max. 11,000lx Incandescent lamp : Max. 3,000lx (received illumination)	-10 to 50°C	—	—	BF3RX-P
Application		Ambient Temperature	Protection Structure	Approval	Model	
BFC Series makes for 32 units of fiber optic amplifier, BF5 Series, to connect. BFC Series helps for BF5 Series to execute all functions, to set parameters, to monitor real-time data (received light level, output status) via external device (PC, PLC, etc.).		-10 to 50°C	IP40	CE	BFC-N	
					BFC-P	

Fiber Optic Sensors

Digital Display, Fiber Optic Amplifier / High Performance, Fiber Optic Amplifier /

Through-Beam Type

Appearance	Type	Sensing Distance (mm)	Min. Sensing Target (mm) ^{※3}	Allowable Bend Radius	Cable Length (m)	Free cut ^{※4}	Adapter	Ambient Temperature	Model	
	Flexible type	110 ^{※1}	Ø0.04	R1	1	●	●	-40 to 60°C	FTFU-210-05R	
		110 ^{※1}	Ø0.04	R1	1	●	●	-40 to 60°C	FTFN-210-05R	
		100 ^{※1}	Ø0.04	R1	1	●	●	-40 to 60°C	FTF-210-05R	
		110 ^{※1}	Ø0.04	R1	1	●	●	-40 to 60°C	FTFB-210-05R	
		500 ^{※1}	Ø0.06	R1	1	●	—	-40 to 60°C	FTLU-310-10R	
		500 ^{※1}	Ø0.06	R1	1	●	—	-40 to 60°C	FTLU1-310-10R	
		500 ^{※1}	Ø0.06	R1	1	●	—	-40 to 60°C	FTLU2-310-10R	
		M3 bolt	110 ^{※1}	Ø0.3	R1	2	●	●	-40 to 60°C	FT-320-05R
		Ø2 cylinder type	110 ^{※1}	Ø0.3	R1	2	●	●	-40 to 60°C	FTC-220-05R
		M4 bolt	500 ^{※1}	Ø0.5	R1	2	●	—	-40 to 60°C	FT-420-10R
	Break-resistant type	M3 bolt	110 ^{※2}	Ø0.3	R5	2	●	●	-40 to 60°C	FT-320-06B
		Ø1.5 cylinder type	110 ^{※2}	Ø0.3	R5	2	●	●	-40 to 60°C	FTC-1520-06B
		M4 bolt	400 ^{※2}	Ø0.6	R5	2	●	—	-40 to 60°C	FT-420-13B
	Heat-resistant type	M4 bolt	300 ^{※2}	Ø1	R30	2	●	—	-40 to 105°C	FT-420-10H
		M4 bolt	500 ^{※2}	Ø1	R50	2	●	—	-40 to 150°C	FT-420-15H1
		M4 bolt / glass type ^{※5}	400 ^{※2}	Ø1	R25	2	—	—	-40 to 250°C	GT-420-13H2
	Flexible type	M4 bolt / Right angle	460 ^{※1}	Ø0.5	R1	1	●	—	-40 to 60°C	FTR-410-10R
	Flexible type	Area type	750 ^{※6}	Ø0.07	R2	1	●	—	-40 to 60°C	FTW11-210-10R

※1. The sensing distance is based on BF5 Series.

※2. The sensing distance is based on red light of BF4 Series. In case of green light, apply 10% value of the red light value. In case of BF3 Series, apply 40% of the sensing distance.

※3. Min. sensing target is based on max. sensitivity. The sensing distance is not same with the rated sensing distance.

※4. In case of free-cut type model, the sensing distance may be shorten up to 20% due to fiber cutting side status. (use the dedicated fiber cutter (FC-3) for free-cut type.)

※5. The glass type model is only for BF5 Series, BF4 Series.

※6. The sensing distance is a standard for BF5 Series, and it is varied by operation mode.

(Ultra Fast mode: 450mm / Fast mode: 750mm / Standard mode: 1400mm / Long distance mode, Ultra long distance mode: 1800mm)

Through-Beam Type

Appearance	Type	Sensing Distance (mm)	Min. Sensing Target (mm) ^{※3}	Allowable Bend Radius	Cable Length (m)	Free cut ^{※4}	Adapter	Ambient Temperature	Model
	Standard type Ø2.47 cylinder type / Side view	120 ^{※1}	Ø0.0125	R15	2	—	—	-40 to 60°C	FTCSN-2520-05
	M3 bolt	150 ^{※2}	Ø0.5	R15	1	●	●	-40 to 70°C	FT-310-05
	M3 bolt	150 ^{※2}	Ø0.5	R15	2	●	●	-40 to 70°C	FT-320-05
	Ø1.5 cylinder type	150 ^{※2}	Ø0.5	R15	2	●	●	-40 to 70°C	FTC-1520-05
	Ø2 cylinder type	150 ^{※2}	Ø0.5	R15	2	●	●	-40 to 70°C	FTC-220-05
	Ø2 cylinder type (SUS type, 15mm)	150 ^{※2}	Ø0.5	R15 (SUS part 10R)	2	●	●	-40 to 70°C	FTCS-220-05
	M3 bolt (SUS type, 90mm)	150 ^{※2}	Ø0.5	R15 (SUS part 10R)	2	●	●	-40 to 70°C	FTS-320-05
	M3 bolt (SUS type, 35mm)	150 ^{※2}	Ø0.5	R15 (SUS part 10R)	2	●	●	-40 to 70°C	FTS1-320-05
	M3 bolt (SUS type, 45mm)	150 ^{※2}	Ø0.5	R15 (SUS part 10R)	2	●	●	-40 to 70°C	FTS2-320-05
	M4 bolt	500 ^{※2}	Ø1	R30	2	●	—	-40 to 70°C	FT-420-10
	Ø3 cylinder type	500 ^{※2}	Ø1	R30	2	●	—	-40 to 70°C	FTC-320-10
	Plastic	500 ^{※2}	Ø1	R30	2	●	—	-40 to 70°C	FTP-320-10
	M4 bolt (SUS type, 90mm)	500 ^{※2}	Ø1	R30 (SUS part 10R)	2	●	—	-40 to 70°C	FTS-420-10
	M4 bolt (SUS type, 45mm)	500 ^{※2}	Ø1	R30 (SUS part 10R)	2	●	—	-40 to 70°C	FTS2-420-10

※1. The sensing distance is based on BF5 Series.

※2. The sensing distance is based on red light of BF4 Series. In case of green light, apply 10% value of the red light value. In case of BF3 Series, apply 40% of the sensing distance.



















※3. Min. sensing target is based on max. sensitivity. The sensing distance is not same with the rated sensing distance.

※4. In case of free-cut type model, the sensing distance may be shorten up to 20% due to fiber cutting side status. (use the dedicated fiber cutter (FC-3) for free-cut type.)

Fiber Optic Sensors

Digital Display, Fiber Optic Amplifier / High Performance, Fiber Optic Amplifier /

Diffuse Reflective Type

Appearance	Type	Sensing Distance (mm)	Min. Sensing Target (mm) ^{※3}	Allowable Bend Radius	Cable Length (m)	Free cut ^{※4}	Adapter	Ambient Temperature	Model	
	Flexible type	Flat type / Top view	35 ^{※1}	Ø0.0125	R1	1	●	●	-40 to 60°C	DFDU-210-05R
		Flat type / Side view	30 ^{※1}	Ø0.0125	R1	1	●	●	-40 to 60°C	DFDN-210-05R
		Flat type / Flat view	30 ^{※1}	Ø0.0125	R1	1	●	●	-40 to 60°C	FDF-210-05R
		M3 bolt	35 ^{※1}	Ø0.0125	R1	2	●	●	-40 to 60°C	FD-320-05R
		M4 bolt	35 ^{※1}	Ø0.0125	R1	2	●	●	-40 to 60°C	FD-420-05R
		M6 bolt	130 ^{※1}	Ø0.04	R1	2	●	—	-40 to 60°C	FD-620-10R
	Break-resistant type	M3 bolt	35 ^{※2}	Ø0.0125	R5	2	●	●	-40 to 60°C	FD-320-06B
		Ø3 cylinder type	35 ^{※2}	Ø0.0125	R5	2	●	●	-40 to 60°C	FDC-320-06B
		M4 bolt	35 ^{※2}	Ø0.0125	R5	2	●	●	-40 to 60°C	FD-420-06B
		M6 bolt	100 ^{※2}	Ø0.0125	R5	2	●	—	-40 to 60°C	FD-620-13B
	Coaxial type	M3 bolt	40 ^{※2}	Ø0.03	R15	2	●	●	-40 to 70°C	FD-320-F
		M3 bolt	60 ^{※2}	Ø0.03	R15	2	●	●	-40 to 70°C	FD-320-F1
		M6 bolt	120 ^{※2}	Ø0.03	R30	2	●	—	-40 to 70°C	FD-620-F2
	Heat-resistant type	M6 bolt	120 ^{※2}	Ø0.03	R30	2	●	—	-40 to 105°C	FD-620-10H
		M6 bolt	160 ^{※2}	Ø0.03	R50	2	●	—	-40 to 150°C	FD-620-15H1
		M4 bolt / glass type ^{※5}	100 ^{※2}	Ø0.03	R50	2	—	—	-40 to 250°C	GD-420-20H2
		M6 bolt / glass type ^{※5}	100 ^{※2}	Ø0.03	R50	2	—	—	-40 to 250°C	GD-620-20H2
	Flexible type	M6 bolt / Right angle	120 ^{※1}	Ø0.04	R1	1	●	—	-40 to 60°C	FDR-610-10R

※1. The sensing distance is based on BF5 Series.


※2. The sensing distance is based on red light of BF4 Series. In case of green light, apply 10% value of the red light value. In case of BF3 Series, apply 40% of the sensing distance.














※3. Min. sensing target is based on max. sensitivity. The sensing distance is not same with the rated sensing distance.

※4. In case of free-cut type model, the sensing distance may be shorten up to 20% due to fiber cutting side status. (use the dedicated fiber cutter (FC-3) for free-cut type.)


※5. The glass type model is only for BF5 Series, BF4 Series.

Diffuse Reflective Type

Appearance	Type	Sensing Distance (mm)	Min. Sensing Target (mm) ^{※3}	Allowable Bend Radius	Cable Length (m)	Free cut ^{※4}	Adapter	Ambient Temperature	Model
	Standard type Ø3 cylinder type / Side view	30 ^{※1}	Ø0.0125	R15	2	—	—	-40 to 60°C	FDCSN-320-05

	Standard type	M3 bolt	40 ^{※2}	Ø0.03	R15	1	●	●	-40 to 70°C	FD-310-05
		M3 bolt	40 ^{※2}	Ø0.03	R15	2	●	●	-40 to 70°C	FD-320-05
		M4 bolt	40 ^{※2}	Ø0.03	R15	2	●	●	-40 to 70°C	FD-420-05
		Ø3 cylinder type	40 ^{※2}	Ø0.03	R15	2	●	●	-40 to 70°C	FDC-320-05
		Ø3 cylinder type (SUS type, 15mm)	40 ^{※2}	Ø0.03	15R (SUS part 10R)	2	●	●	-40 to 70°C	FDSC-320-05
		M3 bolt (SUS type, 90mm)	40 ^{※2}	Ø0.03	15R (SUS part 10R)	2	●	●	-40 to 70°C	FDS-320-05
		M3 bolt (SUS type, 45mm)	40 ^{※2}	Ø0.03	15R (SUS part 10R)	2	●	●	-40 to 70°C	FDS2-320-05
		M4 bolt (SUS type, 90mm)	40 ^{※2}	Ø0.03	15R (SUS part 10R)	2	●	●	-40 to 70°C	FDS-420-05
		M4 bolt (SUS type, 45mm)	40 ^{※2}	Ø0.03	15R (SUS part 10R)	2	●	●	-40 to 70°C	FDS2-420-05
		M6 bolt	120 ^{※2}	Ø0.03	R30	2	●	—	-40 to 70°C	FD-620-10
		M6 bolt (SUS type, 90mm)	120 ^{※2}	Ø0.03	R30 (SUS part 10R)	2	●	—	-40 to 70°C	FDS-620-10
		M6 bolt (SUS type, 45mm)	120 ^{※2}	Ø0.03	R30 (SUS part 10R)	2	●	—	-40 to 70°C	FDS2-620-10
		Plastic	120 ^{※2}	Ø0.03	R30	2	●	—	-40 to 70°C	FDP-320-10


Convergent Reflective Type


Appearance	Type	Sensing Distance (mm)	Min. Sensing Target (mm) ^{※3}	Allowable Bend Radius	Cable Length (m)	Free cut	Adapter	Ambient Temperature	Model
	Convergent type	8 ^{※1}	Ø0.0125	R25	2	—	—	-40 to 60°C	FLF-320-10


- ※1. The sensing distance is based on BF5 Series.
- ※2. The sensing distance is based on red light of BF4 Series. In case of green light, apply 10% value of the red light value. In case of BF3 Series, apply 40% of the sensing distance.
- ※3. Min. sensing target is based on max. sensitivity. The sensing distance is not same with the rated sensing distance.
- ※4. In case of free-cut type model, the sensing distance may be shorten up to 20% due to fiber cutting side status. (use the dedicated fiber cutter (FC-3) for free-cut type.)


Door / Area Sensor

Door Sensor / Door Side Sensor / Economical Door Side Sensor /

Series	Sensing Method	Mounting Height	Light Source	Power Supply	Power Consumption	Control Output
Door Sensor ADS-A Series  W224×H60×L26mm	Diffuse Reflective Type	2.0 to 2.7m	Infrared LED (850nm modulated)	24-240VAC 24-240VDC	Max. 4VA (at 240VAC)	Relay (SPST(1a))
				12-24VAC 12-24VDC	Max. 2VA (at 24VAC)	

Series	Sensing Method	Sensing Distance	Light Source	Power Supply	Current Consumption And Power Consumption	Control Output	Sensor Mounting
Door Side Sensor ADS-SE  W77×H30×L44mm	Through-beam type	0 to 10m	Infrared LED (850nm modulated)	12-24VAC 12-24VDC	Current Consumption : Max. 2VA Power Consumption : Max. 50mA	Relay (SPST(1a))	2-CH

Economical Door Side Sensor ADS-SE1/2  W77×H24×L44mm	Through-beam type	0 to 10m	Infrared LED (850nm modulated)	12-24VAC 12-24VDC	Current Consumption : Max. 2VA Power Consumption : Max. 50mA	Relay (SPST(1a))	1-CH
							2-CH

Series	Sensing Method	Sensing Distance	Light Source	Optical Axis Pitch	Number Of Optical Axes	Sensing Height (mm)	Power Supply
Picking Sensor - Plastic Case BWPK Series  W30×H10.5×L140mm	Through-beam type (direct beam)	Long distance mode: 0.1 to 3m Short distance mode: 0.05 to 1m	Infrared LED (850nm modulated)	25mm	5	100	12-24VDC

Front Sensing Area	Left/Right Sensing Area	Environment		Protection Structure	Approval	Model
		Ambient Illumination	Ambient Temperature			
7.5°, 14.5°, 21.5°, 28.5° (4-step setting)	Eliminating each (1, 2, 3 -area), (7, 8, 9 -area)	Sunlight/ Incandescent lamp : Max. 3,000lx (receiver illumination)	-20 to 50°C	IP50	—	ADS-AF
						ADS-AE


Sensitivity Setting	Sensor Cable Length	Environment		Protection Structure	Approval	Model
		Ambient Illumination	Ambient Temperature			
Set by button	10m	Sunlight : Max. 100,000lx (receiver illumination)	-20 to 55°C	IP30	—	ADS-SE

Set by button	5m	Sunlight : Max. 100,000lx (receiver illumination)	-20 to 55°C	IP30	CE	ADS-SE1
Set by button	5m	Sunlight : Max. 100,000lx (receiver illumination)	-20 to 55°C	IP30	CE	ADS-SE2


Control Output	Control Output	Environment		Connection	Protection Structure	Approval	Model
		Ambient Illumination	Ambient Temperature				
NPN open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx Incandescent lamp : Max. 3,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø4, 2m)	IP40	CE	BWPK25-05N
PNP open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx Incandescent lamp : Max. 3,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø4, 2m)	IP40	CE	BWPK25-05P

Door / Area Sensor


Door Sensor / Door Side Sensor / Economical Door Side Sensor /

Series	Sensing Method	Sensing Distance	Light Source	Optical Axis Pitch	Number Of Optical Axes	Sensing Height / Total Length (mm)	Power Supply
Area Sensor - Plastic Case BWP Series  W30×H13×L□mm*	Through-beam type (direct beam)	0.1 to 5m	Infrared LED (850nm modulated)	20mm	8	140 / 190	12-24VDC
					12	220 / 270	12-24VDC
					16	300 / 350	12-24VDC
					20	380 / 430	12-24VDC


*The value of □ is total length.

Cross-beam Area Sensor - Aluminium Case BWC Series  W28.6×H22.6×L□mm*	Through-beam type (cross beam)	1 to 7m	Infrared LED (850nm modulated)	40mm	4	120 / 180	12-24VDC
					10	360 / 420	
					12	440 / 500	
					16	600 / 660	
					18	680 / 740	
			20	760 / 820			
			Infrared LED (850nm modulated)	80mm	14	1040 / 1140	

*The value of □ is total length.

Area Sensor - Aluminium Case BW Series  W28.6×H22.6×L□mm*	Through-beam type (direct beam)	0.1 to 7m	Infrared LED (850nm modulated)	20mm	8	140 / 180	12-24VDC
					12	220 / 260	
					16	300 / 340	
					20	380 / 420	
					24	460 / 500	
					28	540 / 580	
					32	620 / 660	
					36	700 / 740	
					40	780 / 820	
					44	860 / 900	
					48	940 / 980	
					40mm	4	
				6		200 / 260	
				8		280 / 340	
				10		360 / 420	
				12		440 / 500	
				14		520 / 580	
				16		600 / 660	
				18		680 / 740	
				20		760 / 820	
				22		840 / 900	
				24		920 / 980	

*The value of □ is total length.

Appearance	Connector Standard	Connection	Connection Method	Cable Material	Cable Length (m)	Model
Connector Cable for Area Sensor BW/BWC (for emitter) CID Series 	M12	DC 4-wire	Socket type	PVC	3	CID4-3T
					5	CID4-5T
					7	CID4-7T
					10	CID4-10T


* Connector cable is sold separately as one set; each of emitter's and receiver's.

Control Output	Control Output	Environment		Connection	Protection Structure	Approval	Model
		Ambient Illumination	Ambient Temperature				
NPN open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø3.5, 3m)	IP40	CE	BWP20-08N
PNP open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø3.5, 3m)	IP40	CE	BWP20-08P
NPN open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø3.5, 3m)	IP40	CE	BWP20-12N
PNP open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø3.5, 3m)	IP40	CE	BWP20-12P
NPN open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø3.5, 3m)	IP40	CE	BWP20-16N
PNP open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø3.5, 3m)	IP40	CE	BWP20-16P
NPN open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø3.5, 3m)	IP40	CE	BWP20-20N
PNP open collector	Light ON/Dark ON (set by switch)	Sunlight: Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable type (Ø3.5, 3m)	IP40	CE	BWP20-20P

NPN open collector	□: Type No-mark: Light ON D: Dark ON	Ambient light : Max. 100,000lx (receiver illumination)	-10 to 55°C	Cable connector type (Ø5, 300mm, M12)	IP65	CE	BWC40-04H□
							BWC40-10H□
							BWC40-12H□
							BWC40-16H□
							BWC40-18H□
							BWC40-20H□
							BWC80-14H□

■: Type No-mark : NPN open collector P: PNP open collector	Light ON	Ambient light : Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable connector type (Ø5, 300mm, M12)	IP65	CE	BW20-08■
							BW20-12■
							BW20-16■
							BW20-20■
							BW20-24■
							BW20-28■
							BW20-32■
							BW20-36■
							BW20-40■
							BW20-44■
BW20-48■							

■: Type No-mark : NPN open collector P: PNP open collector	Light ON	Ambient light : Max. 10,000lx (receiver illumination)	-10 to 55°C	Cable connector type (Ø5, 300mm, M12)	IP65	CE	BW40-04■
							BW40-06■
							BW40-08■
							BW40-10■
							BW40-12■
							BW40-14■
							BW40-16■
							BW40-18■
							BW40-20■
							BW40-22■
BW40-24■							

Appearance	Connector Standard	Connection	Connection Method	Cable Material	Cable Length (m)	Model
Connector Cable for Area Sensor BW/BWC (for receiver) CID Series 	M12	DC 4-wire	Socket type	PVC	3	CID4-3R
					5	CID4-5R
					7	CID4-7R
					10	CID4-10R

Proximity Sensors

Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Diameter	Sensing Distance	Installation	Standard Sensing Target	Response Frequency	Current Specification	
Cylindrical, Cable Type Proximity Sensor PR Series <Non-flush>  <Flush> 	AC 2-wire type 100-240VAC	M12	2mm	Shield (flush)	12×12×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
			4mm	Non-shield (non-flush)	12×12×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
		M18	5mm	Shield (flush)	18×18×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
		M30	10mm	Shield (flush)	30×30×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
			15mm	Non-shield (non-flush)	45×45×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
		DC 2-wire type 12-24VDC	M08	1.5mm	Shield (flush)	8×8×1mm (iron)	1.5kHz	Leakage current : Max. 0.6mA
				2mm	Non-shield (non-flush)	8×8×1mm (iron)	1kHz	Leakage current : Max. 0.6mA
			M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Leakage current : Max. 0.6mA
				4mm	Non-shield (non-flush)	12×12×1mm (iron)	500Hz	Leakage current : Max. 0.6mA
			M18	5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Leakage current : Max. 0.6mA
				8mm	Non-shield (non-flush)	25×25×1mm (iron)	350Hz	Leakage current : Max. 0.6mA
	M30		10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Leakage current : Max. 0.6mA	
			15mm	Non-shield (non-flush)	45×45×1mm (iron)	200Hz	Leakage current : Max. 0.6mA	
	DC 3-wire type 12-24VDC		M08	1.5mm	Shield (flush)	8×8×1mm (iron)	1.5kHz	Current consumption : Max. 10mA
				2mm	Non-shield (non-flush)	8×8×1mm (iron)	1kHz	Current consumption : Max. 10mA
			M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Current consumption : Max. 10mA
				4mm	Non-shield (non-flush)	12×12×1mm (iron)	500Hz	Current consumption : Max. 10mA
		M18	5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Current consumption : Max. 10mA	
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	350Hz	Current consumption : Max. 10mA	
		M30	10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Current consumption : Max. 10mA	
			15mm	Non-shield (non-flush)	45×45×1mm (iron)	200Hz	Current consumption : Max. 10mA	

Control Output	Materials	Connection	Ambient Temperature	Protection Structure	Approval	Non-Polarity	Body Length	Model
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR12-2A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR12-4A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR18-5A□
							Long body	PRL18-5A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR18-8A□
							Long body	PRL18-8A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR30-10A□
							Long body	PRL30-10A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR30-15A□
							Long body	PRL30-15A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRT08-1.5D□
N.O.	Brass (nickel plated)	Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRT08-1.5DO-V
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRT08-2D□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRT12-2D□
							●	Standard type
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRT12-4D□
							●	Standard type
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRT18-5D□
							●	Standard type
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRT18-8D□
							●	Standard type
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRT30-10D□
N.O.	Brass (nickel plated)	Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRT30-10DO-V
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	●	Standard type	PRT30-10X□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRT30-15D□
							●	Standard type
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR08-1.5D□
							Long body	PRL08-1.5D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR08-2D□
							Long body	PRL08-2D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR12-2D□
							Short body	PRS12-2D□
□: Type N: NPN N.O. / P: PNP N.O.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRL12-2D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR12-4D□
							Short body	PRS12-4D□
□: Type N: NPN N.O. / P: PNP N.O.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRL12-4D□
□: Type N: NPN N.O. / P: PNP N.O.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR18-5D□
NPN N.O.	Brass (nickel plated)	Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PR18-5DN-V
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRL18-5D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR18-8D□
							Long body	PRL18-8D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR30-10D□
							Long body	PRL30-10D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PR30-15D□
							Long body	PRL30-15D□

Proximity Sensors

Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Diameter	Sensing Distance	Installation	Standard Sensing Target	Response Frequency	Current Specification	
Cylindrical, Cable Connector Type Proximity Sensor PRW Series <Non-flush>  <Flush> 	AC 2-wire type 100-240VAC	M12	2mm	Shield (flush)	12×12×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
			4mm	Non-shield (non-flush)	12×12×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
		M18	5mm	Shield (flush)	18×18×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
		M30	10mm	Shield (flush)	30×30×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
			15mm	Non-shield (non-flush)	45×45×1mm (iron)	20Hz	Leakage current : Max. 2.5mA	
		DC 2-wire type 12-24VDC	M08	1.5mm	Shield (flush)	8×8×1mm (iron)	1.5kHz	Leakage current : Max. 0.6mA
				2mm	Non-shield (non-flush)	8×8×1mm (iron)	1kHz	Leakage current : Max. 0.6mA
			M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Leakage current : Max. 0.6mA
				4mm	Non-shield (non-flush)	12×12×1mm (iron)	500Hz	Leakage current : Max. 0.6mA
	M18		5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Leakage current : Max. 0.6mA	
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	350Hz	Leakage current : Max. 0.6mA	
	M30		10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Leakage current : Max. 0.6mA	
			15mm	Non-shield (non-flush)	45×45×1mm (iron)	200Hz	Leakage current : Max. 0.6mA	
	DC 3-wire type 12-24VDC		M08	1.5mm	Shield (flush)	8×8×1mm (iron)	1.5kHz	Current consumption : Max. 10mA
				2mm	Non-shield (non-flush)	8×8×1mm (iron)	1kHz	Current consumption : Max. 10mA
		M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Current consumption : Max. 10mA	
			4mm	Non-shield (non-flush)	12×12×1mm (iron)	500Hz	Current consumption : Max. 10mA	

Control Output	Materials	Connection	Ambient Temperature	Protection Structure	Approval	Non-Polarity	Body Length	Model
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW12-2A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW12-4A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW18-5A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRWL18-5A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW18-8A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRWL18-8A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW30-10A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRWL30-10A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW30-15A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRWL30-15A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRWT08-1.5D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRWT08-2D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRWT12-2D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	●	Standard type	PRWT12-2X□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRWT12-4D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	●	Standard type	PRWT12-4X□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRWT18-5D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	●	Standard type	PRWT18-5X□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRWT18-8D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	●	Standard type	PRWT18-8X□-■
N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRWT30-10DC-■
N.O.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRWT30-10DO-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	●	Standard type	PRWT30-10X□-■
N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRWT30-15DC-■
N.O.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRWT30-15DO-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	●	Standard type	PRWT30-15X□-■
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRW08-1.5D□-■
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRWL08-1.5D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRW08-2D□-■
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRWL08-2D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW12-2D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW12-4D□

Proximity Sensors



Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Diameter	Sensing Distance	Installation	Standard Sensing Target	Response Frequency	Current Specification
Cylindrical, Cable Connector Type Proximity Sensor PRW Series <Non-flush>  <Flush> 	DC 3-wire type 12-24VDC	M18	5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Current consumption : Max. 10mA
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	350Hz	Current consumption : Max. 10mA
		M30	10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Current consumption : Max. 10mA
			15mm	Non-shield (non-flush)	45×45×1mm (iron)	200Hz	Current consumption : Max. 10mA
Cylindrical, Connector Type Proximity Sensor PRCM Series <Non-flush>  <Flush> 	AC 2-wire type 100-240VAC	M12	2mm	Shield (flush)	12×12×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
			4mm	Non-shield (non-flush)	12×12×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
		M18	5mm	Shield (flush)	18×18×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
		M30	10mm	Shield (flush)	30×30×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
			15mm	Non-shield (non-flush)	45×45×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
	DC 2-wire type 12-24VDC	M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Leakage current : Max. 0.6mA
			4mm	Non-shield (non-flush)	12×12×1mm (iron)	500Hz	Leakage current : Max. 0.6mA
		M18	5mm	Shield (flush)	18×18×1mm (iron)	350Hz	Leakage current : Max. 0.6mA
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	400Hz	Leakage current : Max. 0.6mA
		M30	10mm	Shield (flush)	30×30×1mm (iron)	200Hz	Leakage current : Max. 0.6mA
			15mm	Non-shield (non-flush)	45×45×1mm (iron)	200Hz	Leakage current : Max. 0.6mA
DC 3-wire type 12-24VDC	M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Current consumption : Max. 10mA	
		4mm	Non-shield (non-flush)	12×12×1mm (iron)	500Hz	Current consumption : Max. 10mA	
	M18	5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Current consumption : Max. 10mA	
		8mm	Non-shield (non-flush)	25×25×1mm (iron)	350Hz	Current consumption : Max. 10mA	
	M30	10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Current consumption : Max. 10mA	
		15mm	Non-shield (non-flush)	45×45×1mm (iron)	200Hz	Current consumption : Max. 10mA	

Control Output	Materials	Connection	Ambient Temperature	Protection Structure	Approval	Non-Polarity	Body Length	Model
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW18-5D□
							Long body	PRWL18-5D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRW18-8D□
							Long body	PRWL18-8D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRW30-10D□-■
		Standard cable					Long body	PRWL30-10D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRW30-15D□-■
		Standard cable					Long body	PRWL30-15D□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM12-2A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM12-4A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM18-5A□
							Long body	PRCML18-5A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM18-8A□
							Long body	PRCML18-8A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM30-10A□
							Long body	PRCML30-10A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM30-15A□
							Long body	PRCML30-15A□
N.C.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRCMT12-2DC-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRCMT12-4D□-I
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCMT18-5D□
N.O.	Brass (nickel plated)	IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRCMT18-5DO-I
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCMT18-8D□
N.C.	Brass (nickel plated)	IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRCMT18-8DC-I
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRCMT30-10D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRCMT30-15D□-■
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM12-2D□
PNP N.O.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Long body	PRCML12-2DP
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM12-4D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM18-5D□
							Long body	PRCML18-5D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM18-8D□
							Long body	PRCML18-8D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM30-10D□
							Long body	PRCML30-10D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRCM30-15D□
							Long body	PRCML30-15D□

Proximity Sensors

Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Diameter	Sensing Distance	Installation	Standard Sensing Target	Response Frequency	Current Specification
Cylindrical, Long Sensing Distance, Cable Type Proximity Sensor PRD Series <Non-flush>  <Flush> 	DC 2-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	450Hz	Leakage current : Max. 0.6mA
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	400Hz	Leakage current : Max. 0.6mA
		M18	7mm	Shield (flush)	20×20×1mm (iron)	250Hz	Leakage current : Max. 0.6mA
			14mm	Non-shield (non-flush)	40×40×1mm (iron)	200Hz	Leakage current : Max. 0.6mA
		M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Leakage current : Max. 0.6mA
			25mm	Non-shield (non-flush)	75×75×1mm (iron)	100Hz	Leakage current : Max. 0.6mA
	DC 3-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	500Hz	Current consumption : Max. 10mA
			8mm	Non-shield (non-flush)	25×25×1mm (Iron)	400Hz	Current consumption : Max. 10mA
		M18	7mm	Shield (flush)	20×20×1mm (iron)	300Hz	Current consumption : Max. 10mA
			14mm	Non-shield (non-flush)	40×40×1mm (iron)	200Hz	Current consumption : Max. 10mA
		M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Current consumption : Max. 10mA
			25mm	Non-shield (non-flush)	75×75×1mm (iron)	100Hz	Current consumption : Max. 10mA

Control Output	Materials	Connection	Ambient Temperature	Protection Structure	Approval	Non-Polarity	Body Length	Model
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDT12-4D□-■
N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	●	Standard type	PRDT12-4XC■
N.O.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	●	Standard type	PRDT12-4XO
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Long body	PRDLT12-4D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDT12-8D□-■
						●	Standard type	PRDT12-8X□-■
						—	Long body	PRDLT12-8D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDT18-7D□-■
						●	Standard type	PRDT18-7X□-■
						—	Long body	PRDLT18-7D□-■
						●	Long body	PRDLT18-7X□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDT18-14D□-■
						●	Standard type	PRDT18-14X□-■
						—	Long body	PRDLT18-14D□-■
						●	Long body	PRDLT18-14X□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDT30-15D□-■
N.O.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	●	Standard type	PRDT30-15XO■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Long body	PRDLT30-15D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDT30-25D□-■
						●	Standard type	PRDT30-25X□-■
						—	Long body	PRDLT30-25D□-■
□: Type N: NPN N.O. / N2: NPN N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRD12-4D□
						—	Long body	PRDL12-4D□
□: Type N: NPN N.O. / N2: NPN N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRD12-8D□
						—	Long body	PRDL12-8D□
□: Type N: NPN N.O. / N2: NPN N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRD18-7D□
						—	Long body	PRDL18-7D□
□: Type N: NPN N.O. / N2: NPN N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRD18-14D□
						—	Long body	PRDL18-14D□
□: Type N: NPN N.O. / N2: NPN N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRD30-15D□-■
		Standard cable				—	Long body	PRDL30-15D□
□: Type N: NPN N.O. / N2: NPN N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRD30-25D□-■
		Standard cable				—	Long body	PRDL30-25D□

Proximity Sensors



Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Diameter	Sensing Distance	Installation	Standard Sensing Target	Response Frequency	Current Specification
Cylindrical, Long Sensing Distance, Cable Connector Type Proximity Sensor PRDW Series <Non-flush>  <Flush> 	DC 2-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	450Hz	Leakage current : Max. 0.6mA
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	400Hz	Leakage current : Max. 0.6mA
		M18	7mm	Shield (flush)	20×20×1mm (iron)	250Hz	Leakage current : Max. 0.6mA
			14mm	Non-shield (non-flush)	40×40×1mm (iron)	200Hz	Leakage current : Max. 0.6mA
		M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Leakage current : Max. 0.6mA
			25mm	Non-shield (non-flush)	75×75×1mm (iron)	100Hz	Leakage current : Max. 0.6mA
	DC 3-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	500Hz	Current consumption : Max. 10mA
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	400Hz	Current consumption : Max. 10mA
		M18	7mm	Shield (flush)	20×20×1mm (iron)	300Hz	Current consumption : Max. 10mA
			14mm	Non-shield (non-flush)	40×40×1mm (iron)	200Hz	Current consumption : Max. 10mA
		M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Current consumption : Max. 10mA
			25mm	Non-shield (non-flush)	75×75×1mm (iron)	100Hz	Current consumption : Max. 10mA

Control Output	Materials	Connection	Ambient Temperature	Protection Structure	Approval	Non-Polarity	Body Length	Model
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRDWT12-4D□-■
		●				Standard type	PRDWT12-4X□-■	
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRDWT12-8D□-■
		●				Standard type	PRDWT12-8X□-■	
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRDWT18-7D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	●	Standard type	PRDWT18-7X□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Long body	PRDWLT18-7D□-IV
N.O.	Brass (nickel plated)	Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	●	Long body	PRDWLT18-7XO-IV
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRDWT18-14D□-■
		●				Standard type	PRDWT18-14X□-■	
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRDWT30-15D□-■
N.C.	Brass (nickel plated)	Standard cable	-25 to 70°C	IP67	CE	●	Standard type	PRDWT30-15XC
N.O.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	●	Standard type	PRDWT30-15XO-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRDWT30-25D□-■
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDW12-4D□-■
		Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRDWL12-4D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDW12-8D□-■
		Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRDWL12-8D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDW18-7D□-■
		Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRDWL18-7D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDW18-14D□-■
		Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRDWL18-14D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDW30-15D□-■
		Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRDWL30-15D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDW30-25D□-■
		Standard cable	-25 to 70°C	IP67	CE	—	Long body	PRDWL30-25D□

Proximity Sensors




Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Diameter	Sensing Distance	Installation	Standard Sensing Target	Response Frequency	Current Specification	
Cylindrical, Long Sensing Distance, Connector Type Proximity Sensor PRDCM Series <Non-flush> 	DC 2-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	450Hz	Leakage current : Max. 0.6mA	
			8mm	Non-shield (non-flush)	25×25×1mm (iron)	400Hz	Leakage current : Max. 0.6mA	
		M18	7mm	Shield (flush)	20×20×1mm (iron)	250Hz	Leakage current : Max. 0.6mA	
			14mm	Non-shield (non-flush)	40×40×1mm (iron)	200Hz	Leakage current : Max. 0.6mA	
		M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Leakage current : Max. 0.6mA	
			25mm	Non-shield (non-flush)	75×75×1mm (iron)	100Hz	Leakage current : Max. 0.6mA	
	<Flush> 	DC 3-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	500Hz	Current consumption : Max. 10mA
				8mm	Non-shield (non-flush)	25×25×1mm (iron)	400Hz	Current consumption : Max. 10mA
			M18	7mm	Shield (flush)	20×20×1mm (iron)	300Hz	Current consumption : Max. 10mA
				14mm	Non-shield (non-flush)	40×40×1mm (iron)	200Hz	Current consumption : Max. 10mA
			M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Current consumption : Max. 10mA
				25mm	Non-shield (non-flush)	75×75×1mm (iron)	100Hz	Current consumption : Max. 10mA

Control Output	Materials	Connection	Ambient Temperature	Protection Structure	Approval	Non-Polarity	Body Length	Model
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDCMT12-4D□
N.O.	Brass (nickel plated)	IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDCMT12-4DO-I
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDCMT12-8D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDCMT18-7D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Long body	PRDCMLT18-7D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDCMT18-14D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Long body	PRDCMLT18-14D□-■
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDCMT30-15D□-■
N.O.	Brass (nickel plated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Long body	PRDCMLT30-15DO-■
N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Long body	PRDCMLT30-15DC
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDCMT30-25D□-I
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDCM12-4D□
						—	Long body	PRDCML12-4D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDCM12-8D□
						—	Long body	PRDCML12-8D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDCM18-7D□
						—	Long body	PRDCML18-7D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDCM18-14D□
						—	Long body	PRDCML18-14D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDCM30-15D□
						—	Long body	PRDCML30-15D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (nickel plated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDCM30-25D□

Proximity Sensors

Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Diameter	Sensing Distance	Installation	Standard Sensing Target	Response Frequency	Current Specification
Cylindrical, Spatter-Resistance, Cable Type Proximity Sensor PRA Series 	AC 2-wire type 100-240VAC	M12	2mm	Shield (flush)	12×12×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
		M18	5mm	Shield (flush)	18×18×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
		M30	10mm	Shield (flush)	30×30×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
	DC 2-wire type 12-24VDC	M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Leakage current : Max. 0.6mA
		M18	5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Leakage current : Max. 0.6mA
		M30	10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Leakage current : Max. 0.6mA
	DC 3-wire type 12-24VDC	M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Current consumption : Max. 10mA
		M18	5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Current consumption : Max. 10mA
		M30	10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Current consumption : Max. 10mA
Cylindrical, Spatter-Resistance, Cable Connector Type Proximity Sensor PRAWT Series 	DC 2-wire type 12-24VDC	M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Leakage current : Max. 0.6mA
		M18	5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Leakage current : Max. 0.6mA
		M30	10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Leakage current : Max. 0.6mA
Cylindrical, Spatter-Resistance, Connector Type Proximity Sensor PRACM Series 	DC 2-wire type 12-24VDC	M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Leakage current : Max. 0.6mA
		M18	5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Leakage current : Max. 0.6mA
		M30	10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Leakage current : Max. 0.6mA
	DC 3-wire type 12-24VDC	M12	2mm	Shield (flush)	12×12×1mm (iron)	1.5kHz	Current consumption : Max. 10mA
		M18	5mm	Shield (flush)	18×18×1mm (iron)	500Hz	Current consumption : Max. 10mA
		M30	10mm	Shield (flush)	30×30×1mm (iron)	400Hz	Current consumption : Max. 10mA

Control Output	Materials	Connection	Ambient Temperature	Protection Structure	Approval	Non-Polarity	Body Length	Model
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRA12-2A□
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRA18-5A□
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRA30-10A□
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRAT12-2D□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	Standard cable	-25 to 70°C	IP67	CE	●	Standard type	PRAT12-2X□
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRAT18-5D□
						●	Standard type	PRAT18-5X□
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRAT30-10D□-■
		Standard cable	-25 to 70°C	IP67	CE	●	Standard type	PRAT30-10X□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (teflon coated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRA12-2D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (teflon coated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRA18-5D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (teflon coated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRA30-10D□
N.C.	Brass (teflon coated)	Standard cable	-25 to 70°C	IP67	CE	—	Standard type	PRAWT12-2DC
N.O.	Brass (teflon coated)	IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRAWT12-2DO-I
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRAWT18-5D□-■
						●	Standard type	PRAWT18-5X□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRAWT30-10D□-■
						●	Standard type	PRAWT30-10X□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRACMT12-2D□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRACMT18-5D□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRACMT30-10D□-■
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (teflon coated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRACM12-2D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (teflon coated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRACM18-5D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (teflon coated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRACM30-10D□

Proximity Sensors

Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Diameter	Sensing Distance	Installation	Standard Sensing Target	Response Frequency	Current Specification
Cylindrical, Long Sensing Distance, Spatter-Resistance, Cable Type Proximity Sensor PRDAT Series 	DC 2-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	450Hz	Leakage current : Max. 0.6mA
		M18	7mm	Shield (flush)	20×20×1mm (iron)	250Hz	Leakage current : Max. 0.6mA
		M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Leakage current : Max. 0.6mA
Cylindrical, Long Sensing Distance, Spatter-Resistance, Cable Connector Type Proximity Sensor PRDAWT Series 	DC 2-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	450Hz	Leakage current : Max. 0.6mA
		M18	7mm	Shield (flush)	20×20×1mm (iron)	250Hz	Leakage current : Max. 0.6mA
		M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Leakage current : Max. 0.6mA
Cylindrical, Long Sensing Distance, Spatter-Resistance, Connector Type Proximity Sensor PRDACM Series 	DC 2-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	450Hz	Leakage current : Max. 0.6mA
		M18	7mm	Shield (flush)	20×20×1mm (iron)	250Hz	Leakage current : Max. 0.6mA
		M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Leakage current : Max. 0.6mA
	DC 3-wire type 12-24VDC	M12	4mm	Shield (flush)	12×12×1mm (iron)	500Hz	Current consumption : Max. 10mA
		M18	7mm	Shield (flush)	20×20×1mm (iron)	300Hz	Current consumption : Max. 10mA
		M30	15mm	Shield (flush)	45×45×1mm (iron)	100Hz	Current consumption : Max. 10mA

Control Output	Materials	Connection	Ambient Temperature	Protection Structure	Approval	Non-Polarity	Body Length	Model
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDAT12-4D□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDAT18-7D□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable V: Oil-resistance cable	-25 to 70°C	IP67	CE	—	Standard type	PRDAT30-15D□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDAWT12-4D□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRDAWT18-7D□-■
N.C.	Brass (teflon coated)	■: Type No-mark: Standard cable I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDAWT30-15DC-■
N.O.	Brass (teflon coated)	■: Type No-mark: Standard cable I: IEC standard IV: Oil-resistance cable (IEC standard)	-25 to 70°C	IP67	CE	—	Standard type	PRDAWT30-15DO-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDACMT12-4D□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDACMT18-7D□-■
□: Type O: N.O. / C: N.C.	Brass (teflon coated)	■: Type No-mark: Standard connector I: IEC standard	-25 to 70°C	IP67	CE	—	Standard type	PRDACMT30-15D□-■
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (teflon coated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDACM12-4D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (teflon coated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDACM18-7D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Brass (teflon coated)	Standard connector	-25 to 70°C	IP67	CE	—	Standard type	PRDACM30-15D□

Proximity Sensors


Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Size	Sensing Distance	Standard Sensing Target	Response Frequency	Current Specification
Rectangular, Standard Type Proximity Sensor PS/PSN Series 	AC 2-wire type 100-240VAC	Frame size 25mm	5mm	25×25×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
		Frame size 30mm	10mm	30×30×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
			15mm	45×45×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
		Frame size 40mm	20mm	60×60×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
	DC 2-wire type 12-24VDC	Frame size 17mm	5mm	18×18×1mm (iron)	700Hz	Leakage current : Max. 0.6mA
	DC 3-wire type 12-24VDC	Frame size 12mm	4mm	12×12×1mm (iron)	500Hz	Current consumption : Max. 10mA
		8mm	25×25×1mm (iron)	200Hz	Current consumption : Max. 10mA	
			Frame size 25mm	5mm	25×25×1mm (iron)	300Hz
		Frame size 30mm	10mm	30×30×1mm (iron)	250Hz	Current consumption : Max. 10mA
			15mm	45×45×1mm (iron)	200Hz	Current consumption : Max. 10mA
		Frame size 40mm	20mm	60×60×1mm (iron)	100Hz	Current consumption : Max. 10mA
		Frame size 50mm	30mm	90×90×1mm (iron)	50Hz	Current consumption : Max. 10mA

Control Output	Sensing Method	Materials	Ambient Temperature	Protection Structure	Approval	Different Frequency	Model
<input type="checkbox"/> Type O: N.O. / C: N.C.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN25-5A□
<input type="checkbox"/> Type O: N.O. / C: N.C.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN30-10A□
<input type="checkbox"/> Type O: N.O. / C: N.C.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN30-15A□
<input type="checkbox"/> Type O: N.O. / C: N.C.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN40-20A□
<input type="checkbox"/> Type O: N.O. / C: N.C.	<input checked="" type="checkbox"/> Type No-mark: Standard type (front sensing type) U: Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSNT17-5D□■
NPN N.O.	<input checked="" type="checkbox"/> Type No-mark: Standard type (front sensing type) U: Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PS12-4DN■
PNP N.O.	<input checked="" type="checkbox"/> Type No-mark: Standard type (front sensing type) U: Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PS12-4DP■
NPN N.C.	<input checked="" type="checkbox"/> Type No-mark: Standard type (front sensing type) U: Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PS12-4DN2■
<input type="checkbox"/> Type N: NPN N.O. / N2: NPN N.C.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN17-5D□
<input type="checkbox"/> Type N: NPN N.O. / N2: NPN N.C.	Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN17-5D□U
NPN N.O.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	●	PSN17-5DN-F
<input type="checkbox"/> Type P: PNP N.O. / P2: PNP N.C.	<input checked="" type="checkbox"/> Type No-mark: Standard type (front sensing type) U: Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN17-5D□■
<input type="checkbox"/> Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	<input checked="" type="checkbox"/> Type No-mark: Standard type (front sensing type) U: Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN17-8D□■
<input type="checkbox"/> Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	<input checked="" type="checkbox"/> Type No-mark: Standard type (front sensing type) U: Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	●	PSN17-8D□■-F
PNP N.O.	<input checked="" type="checkbox"/> Type No-mark: Standard type (front sensing type) U: Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	●	PSN17-8DP■-F
<input type="checkbox"/> Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN25-5D□
<input type="checkbox"/> Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN30-10D□
<input type="checkbox"/> Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN30-15D□
<input type="checkbox"/> Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Standard type (front sensing type)	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PSN40-20D□
<input type="checkbox"/> Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Upper sensing type	Heat-resistant ABS	-25 to 70°C	IP67	CE	—	PS50-30D□


Proximity Sensors

Cylindrical Cable · Cable Connector · Connector Type Proximity Sensor/
 Cylindrical Spatter-Resistance Cable · Cable Connector · Connector Type Proximity Sensor/
 Rectangular Standard · Flat Type Proximity Sensor / Rectangular Long Sensing Distance Type Proximity Sensor /

Series	Wire Type And Power	Sensing Side Size	Sensing Distance	Standard Sensing Target	Response Frequency	Current Specification
Rectangular, Flat Type Proximity Sensor PFI Series 	AC 2-wire type 100-240VAC	Frame size 25mm	8mm	25×25×1mm (iron)	20Hz	Leakage current : Max. 2.5mA
	DC 3-wire type 12-24VDC	Frame size 25mm	8mm	25×25×1mm (iron)	200Hz	Current consumption : Max. 10mA

Rectangular, Long Sensing Distance Type Proximity Sensor AS Series 	DC 4-wire type 12-48VDC	Frame size 80mm	50mm	150×150×1mm (iron)	30Hz	Current consumption : Max. 20mA
--	----------------------------	-----------------	------	--------------------	------	---------------------------------

Series	Wire Type And Power	Sensing Side Diameter	Sensing Distance	Standard Sensing Target	Response Frequency	Current Specification
Cylindrical, Capacitive Type Proximity Sensor CR Series 	AC 2-wire type 100-240VAC	M18	8mm	50×50×1mm (iron)	20Hz	Leakage current : Max. 2.2mA
		M30	15mm	50×50×1mm (iron)	20Hz	Leakage current : Max. 2.2mA
	DC 3-wire type 12-24VDC	M18	8mm	50×50×1mm (iron)	50Hz	Current consumption : Max. 15mA
		M30	15mm	50×50×1mm (iron)	50Hz	Current consumption : Max. 15mA

Series	Sensing Side Diameter	Transmission Distance	Set Transmission Distance	Response Time
Transmission Coupler PET18-5 	M18	5mm	1 to 4.5mm	Max. 1ms


Control Output	Sensing Method	Materials	Ambient Temperature	Protection Structure	Approval	Different Frequency	Model
□: Type O: N.O. / C: N.C.	Upper sensing type	PPS	-25 to 70°C	IP67	CE	—	PFI25-8A□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O. / P2: PNP N.C.	Upper sensing type	PPS	-25 to 70°C	IP67	CE	—	PFI25-8D□
□: Type N3: NPN N.O.+N.C. P3: PNP N.O.+N.C.	Upper sensing type	—	-25 to 70°C	IP67	CE	—	AS80-50D□


Control Output	Materials	Ambient Temperature	Protection Structure	Approval	Model
□: Type O: N.O. / C: N.C.	PA6	-25 to 70°C	IP66	CE	CR18-8A□
□: Type O: N.O. / C: N.C.	Brass (nickel plated)	-25 to 70°C	IP65	CE	CR30-15A□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O.	PA6	-25 to 70°C	IP66	CE	CR18-8D□
□: Type N: NPN N.O. / N2: NPN N.C. P: PNP N.O.	Brass (nickel plated)	-25 to 70°C	IP65	CE	CR30-15D□


Materials	Ambient Temperature	Protection Structure	Approval	Model
Brass (nickel plated)	-25 to 70°C	IP67	CE	PET18-5

Pressure Sensors


Pneumatic · Fluid, Square Type Pressure Sensor / Pneumatic, Square, Digital Type Pressure Sensor /

Series	Applicable Fluid	Pressure Port Direction	Pressure Port	Connection	Pressure Type	Rated Pressure Range	Display Pressure Unit
Pneumatic, Square, Connector Type Digital Pressure Sensor PSAN Series  W30×H30×L30.7mm	Air, Non-corrosive gas	Rear fitting	■: Type R1/8 Rc(PT)1/8 NPT1/8	Connector type (connector type cable: 2m)	Standard pressure	0.0 to 100.0kPa	MPa, kPa, kgf/cm ² , bar, psi
						0 to 1,000kPa	MPa, kPa, kgf/cm ² , bar, psi
					Negative pressure	0.0 to -101.3kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O
					Compound pressure	-101.3 to 100.0kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O

Fluid, Square, Connector Type Digital Pressure Sensor PSAN Series  W30×H30×L32mm	Air, Non-corrosive gas and fluid that will not corrode SUS316L	Bottom fitting	■: Type R1/8 NPT1/8	Connector type (connector type cable: 2m)	Standard pressure	0.0 to 100.0kPa	MPa, kPa, kgf/cm ² , bar, psi	
						0 to 1,000kPa	MPa, kPa, kgf/cm ² , bar, psi	
				7/16-20UNF	Connector type (connector type cable: 2m)	Standard pressure	0 to 1,000kPa	MPa, kPa, kgf/cm ² , bar, psi
				■: Type R1/8 NPT1/8	Connector type (connector type cable: 2m)	Negative pressure	0.0 to -101.3kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O
				Compound pressure	-101.3 to 100.0kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O		

Fluid, Square, Cable Type Digital Pressure Sensor PSAN Series  W30×H30×L42.3mm	Air, Non-corrosive gas and fluid that will not corrode SUS316L	Rear fitting	■: Type R1/8 9/16-18UNF	Cable type (cable type cable: 3m)	Standard pressure	0 to 1,000kPa	MPa, kPa, kgf/cm ² , bar, psi
					Compound pressure	-101.3 to 100.0kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O

※Sold separately: Front cover (PSO-P01), Panel bracket (PSO-B02/B03)


Series	Applicable Fluid	Pressure Port Direction	Pressure Port	Connection	Pressure Type	Rated Pressure Range	Display Pressure Unit
Pneumatic, Square, Cable Type Digital Pressure Sensor PSA Series  W30×H30×L38.5mm	Air, Non-corrosive gas	Rear fitting (3-direction)	■: Type Rc(PT)1/8 NPT1/8	Cable type (cable type cable: 2m)	Standard pressure	0.0 to 100.0kPa	kPa, kgf/cm ² , bar, psi
						0 to 1,000kPa	
					Negative pressure	0.0 to -101.3kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O
					Compound pressure	-100.0 to 100.0kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O


※Sold separately: Front cover (PSO-02), Panel bracket (PSO-01)


Control Output		Option Input/Output	Power Supply	Current Consumption	Protection Structure	Approval	Model
NPN Open Collector	PNP Open Collector						
●	—	□: Type V: Voltage (1-5VDC) output A: Current (DC4-20mA) output H: HOLD/ AUTO SHIFT input	12-24VDC	Voltage output type : Max. 50mA Current output type : Max. 75mA	IP40	CE	PSAN-01C□-■
—	●						PSAN-01CP□-■
●	—						PSAN-1C□-■
—	●						PSAN-1CP□-■
●	—	□: Type V: Voltage (1-5VDC) output A: Current (DC4-20mA) output H: HOLD/ AUTO SHIFT input	12-24VDC	Voltage output type : Max. 50mA Current output type : Max. 75mA	IP40	CE	PSAN-V01C□-■
—	●						PSAN-V01CP□-■
●	—				IP40	CE	PSAN-C01C□-■
—	●						PSAN-C01CP□-■
●	—	□: Type V: Voltage (1-5VDC) output A: Current (DC4-20mA) output H: HOLD/ AUTO SHIFT input	12-24VDC	Voltage output type : Max. 50mA Current output type : Max. 75mA	IP40	CE	PSAN-L01C□-■
—	●						PSAN-L01CP□-■
●	—	□: Type V: Voltage (1-5VDC) output A: Current (DC4-20mA) output H: HOLD/ AUTO SHIFT input	12-24VDC	Voltage output type : Max. 50mA Current output type : Max. 75mA	IP40	CE	PSAN-L1C□-■
—	●						PSAN-L1CP□-■
●	—	Voltage (1-5VDC) output	12-24VDC		IP40	CE	PSAN-L1CV-7/16-20UNF
●	—	□: Type V: Voltage (1-5VDC) output A: Current (DC 4-20mA) output H: HOLD/ AUTO SHIFT input	12-24VDC	Voltage output type : Max. 50mA Current output type : Max. 75mA	IP40	CE	PSAN-LV01C□-■
—	●						PSAN-LV01CP□-■
●	—	□: Type V: Voltage (1-5VDC) output A: Current (DC4-20mA) output H: HOLD/ AUTO SHIFT input	12-24VDC	Voltage output type : Max. 50mA Current output type : Max. 75mA	IP40	CE	PSAN-LC01C□-■
—	●						PSAN-LC01CP□-■
●	—	□: Type V: Voltage (1-5VDC) output H: HOLD/ AUTO SHIFT input	12-24VDC	Voltage output type : Max. 50mA Current output type : Max. 75mA	IP65	CE	PSAN-B1□-■
—	●						PSAN-B1P□-■
●	—	□: Type V: Voltage (1-5VDC) output H: HOLD/ AUTO SHIFT input	12-24VDC	Voltage output type : Max. 50mA Current output type : Max. 75mA	IP65	CE	PSAN-BC01□-■
—	●						PSAN-BC01P□-■
Control Output		Option Output	Power Supply	Current Consumption	Protection Structure	Approval	Model
NPN Open Collector	PNP Open Collector						
●	—	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSA-01-■
—	●						PSA-01P-■
●	—						PSA-1-■
—	●						PSA-1P-■
●	—	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSA-V01-■
—	●						PSA-V01P-■
●	—	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSA-C01-■
—	●						PSA-C01P-■

Pressure Sensors

Pneumatic · Fluid, Square Type Pressure Sensor / Pneumatic, Square, Digital Type Pressure Sensor /

Series	Applicable Fluid	Pressure Port Direction	Connection	Pressure Type	Rated Pressure Range	Display Pressure Unit
Pneumatic, Rectangular, Connector Type Digital Pressure Sensor PSB Series  W52×H10×L25.5mm	Air, Non-corrosive gas	M5	Connector type (Connector type cable: 3m)	Standard pressure	0.0 to 100.0kPa	kPa, kgf/cm ² , bar, psi
					0 to 1,000kPa	kPa, kgf/cm ² , bar, psi
				Negative pressure	0.0 to -101.3kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O
				Compound pressure	-100.0 to 100.0kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O

Pneumatic, Rectangular, Cable Type Digital Pressure Sensor PSB Series  W54.2×H10.4×L25mm	Air, Non-corrosive gas	M5	Cable type (cable type cable: 2m)	Standard pressure	0.0 to 100.0kPa	kPa, kgf/cm ² , bar, psi
					0 to 1,000kPa	
					0.0 to 100.0kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O
					0 to 1,000kPa	
				Negative pressure	0.0 to -101.3kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O
Compound pressure	-100.0 to 100.0kPa	kPa, kgf/cm ² , bar, psi, mmHg, inHg, mmH ₂ O				

Series	Applicable Fluid	Pressure Port Direction	Connection	Pressure Type	Rated Pressure Range	Display Pressure Unit
Compact, Cable Type Pressure Sensor PSS Series  W11.8×H29.3×L24.8mm	Air, Non-corrosive gas	R1/8	Cable type (cable type cable: 3m)	Standard pressure	0.0 to 100.0kPa	—
					0 to 1,000kPa	—
				Negative pressure	0.0 to -101.3kPa	—
				Compound pressure	-101.3 to 100.0kPa	—

※Pressure Conversion Chart


from \ to	Pa	kPa	MPa	kgf/cm ²	mmHg	mmH ₂ O	psi	bar	inHg
1Pa	1	0.001	0.000001	0.000010197	0.007501	0.101972	0.000145038	0.00001	0.0002953
1kPa	1,000.000	1	0.001	0.010197	7.500617	101.971626	0.145038	0.01	0.2953
1MPa	1,000,000	1,000	1	10.197162	7,500.61683	101,971.626	145.038243	10	295.299875
1kgf/cm ²	98,066.5	98.0665	0.098067	1	735.55924	10,000.0005	14.223393	0.980665	28.959025
1mmHg	133.322368	0.133322	0.000133	0.001359	1	13.595099	0.019337	0.001333	0.039370
1mmH ₂ O	9.80665	0.009807	—	0.000099	0.073556	1	0.00142	0.000098	0.002896
1psi	6,894.733	6.89473	0.006895	0.070307	51.714752	703.016716	1	0.068947	2.036014
1bar	100,000.0	100.0000	0.100000	1.019716	750.062	10,197.1626	14.503824	1	29.529988
1inHg	3,386.388	3.386388	0.003386	0.034532	25.40022	345.315507	0.491156	0.033864	1


Control Output		Option Output	Power Supply	Current Consumption	Protection Structure	Approval	Model
NPN Open Collector	PNP Open Collector						
—	●	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSB-01CP-M5
●	—						PSB-01C-M5
●	—	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSB-1C-M5
—	●						PSB-1CP-M5
●	—	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSB-V01C-M5
—	●						PSB-V01CP-M5
—	●	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSB-C01CP-M5
●	—						PSB-C01C-M5
●	—	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSB-01-M5
—	●						PSB-1-M5
—	●	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSB-01P-M5
—	●						PSB-1P-M5
●	—	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSB-V01P-M5
—	●						PSB-V01-M5
—	●	Voltage (1-5VDC) output	12-24VDC	Max. 50mA	IP40	CE	PSB-C01P-M5
●	—						PSB-C01-M5
Option Output		Power Supply	Current Consumption	Protection Structure	Approval	Model	
Voltage (1-5VDC) output		12-24VDC	Max. 15mA	IP40	CE	PSS-01V-R1/8	
Current (DC4-20mA) output		12-24VDC	—	IP40	CE	PSS-01A-R1/8	
Voltage (1-5VDC) output		12-24VDC	Max. 15mA	IP40	CE	PSS-1V-R1/8	
Current (DC4-20mA) output		12-24VDC	—	IP40	CE	PSS-1A-R1/8	
Voltage (1-5VDC) output		12-24VDC	Max. 15mA	IP40	CE	PSS-V01V-R1/8	
Current (DC4-20mA) output		12-24VDC	—	IP40	CE	PSS-V01A-R1/8	
Voltage (1-5VDC) output		12-24VDC	Max. 15mA	IP40	CE	PSS-C01V-R1/8	
Current (DC4-20mA) output		12-24VDC	—	IP40	CE	PSS-C01A-R1/8	


Rotary Encoders


Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling


Mark for Incremental Type Model Name-: Shaft Outer Diameter/Shaft Inner Diameter, : Resolution, : Output Phase, : Control Output


Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution
Incremental, Ø15mm, Shaft Type Rotary Encoder E15S2-36-2-N-5-R 	Ø2mm	10kHz	3000rpm	Max. 10gf·cm (max. 0.00098N·m)	36

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution
Incremental, Ø18mm, Shaft Type Rotary Encoder E18S Series 	<input type="checkbox"/> : Type 2: Ø2mm 2.5: Ø2.5mm	25kHz	6000rpm	Max. 10gf·cm (max. 0.00098N·m)	<input type="checkbox"/> : Type 100, 200, 300, 400



Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution
Incremental, Ø20mm, Shaft Type Rotary Encoder E20S Series 	Ø2mm	100kHz	6000rpm	Max. 5gf·cm (max. 0.00049N·m)	<input type="checkbox"/> : Type 100, 200, 320, 360



Series	Shaft Inner Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution
Incremental, Ø20mm, Built-in Hollow Shaft Type Rotary Encoder E20HB Series 	<input type="checkbox"/> : Type 2: Ø2mm 2.5: Ø2.5mm 3: Ø3mm	100kHz	6000rpm	Max. 5gf·cm (max. 0.00049N·m)	<input type="checkbox"/> : Type 100, 200, 320, 360



Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (<input type="checkbox"/> : Type)	
					To 500	To 3000
Incremental, Ø30mm, Shaft Type Rotary Encoder E30S Series 	Ø4mm	300kHz	5000rpm	Max. 20gf·cm (max. 0.00196N·m)	100, 200, 360, 500	1000, 1024, 3000



Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (<input type="checkbox"/> : Type)			
					To 50	To 250	To 1000	To 5000
Incremental, Ø40mm, Shaft Type Rotary Encoder E40S Series 	<input type="checkbox"/> : Type 6: Ø6mm 8: Ø8mm	300kHz	5000rpm	Max. 40gf·cm (max. 0.00392N·m)	1, 2, 5, 12	—	—	—
					10, 15, 20, 23, 25, 30, 35, 40, 45, 50	60, 75, 100, 120, 125, 150, 192, 200, 240, 250	256, 300, 360, 400, 500, 512, 600, 800, 1000	1024, 1200, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 5000





Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B	NPN open collector	5VDC	Axial cable type	IP50	—	E15S2-36-2-N-5-R

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A	■: Type N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50	 	E18S□-□-1-■-5-R
			Radial cable type	IP50		E18S□-□-1-■-5-S

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B, Z	■: Type N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50		E20S2-□-3-■-5-R
			Radial cable type	IP50		E20S2-□-3-■-5-S
		12VDC	Axial cable type	IP50		E20S2-□-3-■-12-R
			Radial cable type	IP50		E20S2-□-3-■-12-S
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Axial cable type	IP50	—	E20S2-□-6-L-5-R
			Radial cable type	IP50		E20S2-□-6-L-5-S



Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B, Z	■: Type N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50		E20HB□-□-3-■-5-R
			Radial cable type	IP50		E20HB□-□-3-■-5-S
		12VDC	Axial cable type	IP50		E20HB□-□-3-■-12-R
			Radial cable type	IP50		E20HB□-□-3-■-12-S
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Axial cable type	IP50	—	E20HB□-□-6-L-5-R
			Radial cable type	IP50		E20HB□-□-6-L-5-S

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B, Z	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50		E30S4-□-3-■-5
			Axial cable connector type	IP50		E30S4-□-3-■-5-C
		12-24VDC	Axial cable type	IP50		E30S4-□-3-■-24
			Axial cable connector type	IP50		E30S4-□-3-■-24-C
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Axial cable type	IP50	—	E30S4-□-6-L-5
			Axial cable connector type	IP50		E30S4-□-6-L-5-C

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50		E40S□-□-2-■-5
			Radial cable connector type			E40S□-□-2-■-5-C
		12-24VDC	Radial cable type	IP50		E40S□-□-2-■-24
			Radial cable connector type			E40S□-□-2-■-24-C
A, \bar{A} , B, \bar{B}	Line driver	5VDC	Radial cable type	IP50	—	E40S□-□-4-L-5
			Radial cable connector type			E40S□-□-4-L-5-C
		12-24VDC	Radial cable type	IP50	—	E40S□-□-4-L-24
			Radial cable connector type			E40S□-□-4-L-24-C
■: Type 2: A, B 3: A, B, Z 4: A, \bar{A} , B, \bar{B}	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50		E40S□-□-■-5
			Radial cable connector type			E40S□-□-■-5-C
		12-24VDC	Radial cable type	IP50		E40S□-□-■-24
			Radial cable connector type			E40S□-□-■-24-C
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial cable type	IP50	—	E40S□-□-6-L-5
			Radial cable connector type			E40S□-□-6-L-5-C
		12-24VDC	Radial cable type	IP50	—	E40S□-□-6-L-24
			Radial cable connector type			E40S□-□-6-L-24-C

Rotary Encoders

Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling

Series	Shaft Inner Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)			
					To 50	To 250	To 1000	To 5000
Incremental, Ø40mm, Hollow Shaft Type Rotary Encoder E40H Series 	□: Type 6: Ø6mm 8: Ø8mm 10: Ø10mm 12: Ø12mm	300kHz	5000rpm	Max. 50gf·cm (max. 0.0049N·m)	1, 2, 5, 12	—	—	—
					10, 15, 20, 23, 25, 30, 35, 40, 45, 50	60, 75, 100, 120, 125, 150, 192, 200, 240, 250	256, 300, 360, 400, 500, 512, 600, 800, 1000	1024, 1200, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 5000
Incremental, Ø40mm Built-in Hollow Shaft Type Rotary Encoder E40HB Series 	□: Type 6: Ø6mm 8: Ø8mm 10: Ø10mm 12: Ø12mm	300kHz	5000rpm	Max. 50gf·cm (max. 0.0049N·m)	1, 2, 5, 12	—	—	—
					10, 15, 20, 23, 25, 30, 35, 40, 45, 50	60, 75, 80, 100, 120, 125, 150, 192, 200, 240, 250	256, 300, 360, 400, 500, 512, 600, 800, 1000	1024, 1200, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 5000

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50	CE	E40H□□□-2-■-5
			Radial cable connector type			E40H□□□-2-■-5-C
		12-24VDC	Radial cable type	IP50	CE	E40H□□□-2-■-24
			Radial cable connector type			E40H□□□-2-■-24-C
A, \bar{A} , B, \bar{B}	Line driver	5VDC	Radial cable type	IP50	—	E40H□□□-4-L-5
			Radial cable connector type			E40H□□□-4-L-5-C
		12-24VDC	Radial cable type	IP50	—	E40H□□□-4-L-24
			Radial cable connector type			E40H□□□-4-L-24-C
■: Type 2: A, B 3: A, B, Z 4: A, \bar{A} , B, \bar{B}	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50	CE	E40H□□□■-■-5
			Radial cable connector type			E40H□□□■-■-5-C
		12-24VDC	Radial cable type	IP50	CE	E40H□□□■-■-24
			Radial cable connector type			E40H□□□■-■-24-C
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial cable type	IP50	—	E40H□□□-6-L-5
			Radial cable connector type			E40H□□□-6-L-5-C
		12-24VDC	Radial cable type	IP50	—	E40H□□□-6-L-24
			Radial cable connector type			E40H□□□-6-L-24-C
A, B	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50	CE	E40HB□□□-2-■-5
			Radial cable connector type			E40HB□□□-2-■-5-C
		12-24VDC	Radial cable type	IP50	CE	E40HB□□□-2-■-24
			Radial cable connector type			E40HB□□□-2-■-24-C
A, \bar{A} , B, \bar{B}	Line driver	5VDC	Radial cable type	IP50	—	E40HB□□□-4-L-5
			Radial cable connector type			E40HB□□□-4-L-5-C
		12-24VDC	Radial cable type	IP50	—	E40HB□□□-4-L-24
			Radial cable connector type			E40HB□□□-4-L-24-C
■: Type 2: A, B 3: A, B, Z 4: A, \bar{A} , B, \bar{B}	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50	CE	E40HB□□□■-■-5
			Radial cable connector type			E40HB□□□■-■-5-C
		12-24VDC	Radial cable type	IP50	CE	E40HB□□□■-■-24
			Radial cable connector type			E40HB□□□■-■-24-C
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial cable type	IP50	—	E40HB□□□-6-L-5
			Radial cable connector type			E40HB□□□-6-L-5-C
		12-24VDC	Radial cable type	IP50	—	E40HB□□□-6-L-24
			Radial cable connector type			E40HB□□□-6-L-24-C

Rotary Encoders



Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)			
					To 50	To 256	To 1500	To 8000
Incremental, Ø50mm, Shaft Type Rotary Encoder E50S Series	Ø8mm	300kHz	5000rpm	Max. 70gf·cm (max. 0.00686N·m)	1, 2, 5	—	—	—
					10, 12, 15, 20, 23, 25, 30, 35, 40, 45, 50	60, 75, 100, 120, 125, 150, 192, 200, 240, 250, 256	300, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 1500	1800, 2000, 2048, 2500, 3000, 3600, 4000, 5000, 6000, 8000
	Ø8mm	300kHz	5000rpm	Max. 800gf·cm (max. 0.0784N·m)	1, 2, 5	—	—	—
					10, 12, 15, 20, 23, 25, 30, 35, 40, 45, 50	60, 75, 100, 120, 125, 150, 192, 200, 240, 250, 256	300, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 1500	1800, 2000, 2048, 2500, 3000, 3600, 4000, 5000, 6000, 8000

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50	CE	E50S8-□-2-■-5
			Axial cable connector type	IP50	CE	E50S8-□-2-■-5-C
		12-24VDC	Axial cable type	IP50	CE	E50S8-□-2-■-24
			Axial cable connector type	IP50	CE	E50S8-□-2-■-24-C
A, \bar{A} , B, \bar{B}	Line driver	5VDC	Axial cable type	IP50	—	E50S8-□-4-L-5
			Axial cable connector type	IP50	—	E50S8-□-4-L-5-C
		12-24VDC	Axial cable type	IP50	—	E50S8-□-4-L-24
			Axial cable connector type	IP50	—	E50S8-□-4-L-24-C
■■■: Type 2: A, B 3: A, B, Z 4: A, \bar{A} , B, \bar{B}	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50	CE	E50S8-□-■■■-■-5
			Axial cable connector type	IP50	CE	E50S8-□-■■■-■-5-C
		12-24VDC	Axial cable type	IP50	CE	E50S8-□-■■■-■-24
			Axial cable connector type	IP50	CE	E50S8-□-■■■-■-24-C
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Axial cable type	IP50	—	E50S8-□-6-L-5
			Axial cable connector type	IP50	—	E50S8-□-6-L-5-C
		12-24VDC	Axial cable type	IP50	—	E50S8-□-6-L-24
			Axial cable connector type	IP50	—	E50S8-□-6-L-24-C
A, B	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial connector type	IP65	CE	E50S8-□-2-■-5-CR
			Radial connector type	IP65	CE	E50S8-□-2-■-5-CS
		12-24VDC	Axial connector type	IP65	CE	E50S8-□-2-■-24-CR
			Radial connector type	IP65	CE	E50S8-□-2-■-24-CS
A, \bar{A} , B, \bar{B}	Line driver	5VDC	Axial connector type	IP65	—	E50S8-□-4-L-5-CR
			Radial connector type	IP65	—	E50S8-□-4-L-5-CS
		12-24VDC	Axial connector type	IP65	—	E50S8-□-4-L-24-CR
			Radial connector type	IP65	—	E50S8-□-4-L-24-CS
■■■: Type 2: A, B 3: A, B, Z 4: A, \bar{A} , B, \bar{B}	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial connector type	IP65	CE	E50S8-□-■■■-■-5-CR
			Radial connector type	IP65	CE	E50S8-□-■■■-■-5-CS
		12-24VDC	Axial connector type	IP65	CE	E50S8-□-■■■-■-24-CR
			Radial connector type	IP65	CE	E50S8-□-■■■-■-24-CS
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Axial connector type	IP65	—	E50S8-□-6-L-5-CR
			Radial connector type	IP65	—	E50S8-□-6-L-5-CS
		12-24VDC	Axial connector type	IP65	—	E50S8-□-6-L-24-CR
			Radial connector type	IP65	—	E50S8-□-6-L-24-CS

Rotary Encoders



Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)			
					To 60	To 300	To 1500	To 8000
Incremental, Ø58mm, Clamping, Shaft Type Rotary Encoder E58SC Series 	Ø10mm	300kHz	5000rpm	Max. 40gf·cm (max. 0.00392N·m)	1, 2, 5, 12	—	—	—
					10, 15, 20, 23, 25, 30, 35, 40, 45, 50, 60	75, 100, 120, 125, 150, 192, 200, 240, 250, 256, 300	360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 1500	1800, 2000, 2048, 2500, 3000, 3600, 5000, 6000, 8000
Incremental, Ø58mm, Synchro, Shaft Type Rotary Encoder E58SS Series 	Ø6mm	300kHz	5000rpm	Max. 40gf·cm (max. 0.00392N·m)	1, 2, 5, 12	—	—	—
					10, 15, 20, 23, 25, 30, 35, 40, 45, 50, 60	75, 100, 120, 125, 150, 192, 200, 240, 250, 256, 300	360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 1500	1800, 2000, 2048, 2500, 3000, 3600, 5000, 6000, 8000

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model			
A, B	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial/Radial cable type	IP50	CE	E58SC10-□-2-■-5			
			Axial cable connector type			E58SC10-□-2-■-5-C			
			Axial connector type	IP50	CE	E58SC10-□-2-■-5-CR			
			Radial connector type			E58SC10-□-2-■-5-CS			
			12-24VDC	Axial/Radial cable type	IP50	CE	E58SC10-□-2-■-24		
				Axial cable connector type			E58SC10-□-2-■-24-C		
		Axial connector type		IP50	CE	E58SC10-□-2-■-24-CR			
		Radial connector type				E58SC10-□-2-■-24-CS			
		A, \bar{A} , B, \bar{B}		Line driver	5VDC	Axial/Radial cable type	IP50	—	E58SC10-□-4-L-5
						Axial cable connector type			E58SC10-□-4-L-5-C
			Axial connector type			IP50	—	E58SC10-□-4-L-5-CR	
			Radial connector type					E58SC10-□-4-L-5-CS	
12-24VDC	Axial/Radial cable type		IP50			—	E58SC10-□-4-L-24		
	Axial cable connector type						E58SC10-□-4-L-24-C		
	Axial connector type		IP50		—	E58SC10-□-4-L-24-CR			
	Radial connector type					E58SC10-□-4-L-24-CS			
	■: Type 2: A, B 3: A, B, Z 4: A, \bar{A} , B, \bar{B}		■: Type T: Totem pole N: NPN open collector V: Voltage		5VDC	Axial/Radial cable type	IP50	CE	E58SC10-□-■-5
						Axial cable connector type			E58SC10-□-■-5-C
Axial connector type						IP50	CE	E58SC10-□-■-5-CR	
Radial connector type								E58SC10-□-■-5-CS	
12-24VDC		Axial/Radial cable type		IP50		CE	E58SC10-□-■-24		
		Axial cable connector type					E58SC10-□-■-24-C		
		Axial connector type		IP50	CE	E58SC10-□-■-24-CR			
		Radial connector type				E58SC10-□-■-24-CS			
		A, \bar{A} , B, \bar{B} , Z, \bar{Z}		Line driver	5VDC	Axial/Radial cable type	IP50	—	E58SC10-□-6-L-5
						Axial cable connector type			E58SC10-□-6-L-5-C
Axial connector type						IP50	—	E58SC10-□-6-L-5-CR	
Radial connector type								E58SC10-□-6-L-5-CS	
12-24VDC	Axial/Radial cable type		IP50			—	E58SC10-□-6-L-24		
	Axial cable connector type						E58SC10-□-6-L-24-C		
	Axial connector type		IP50		—	E58SC10-□-6-L-24-CR			
	Radial connector type					E58SC10-□-6-L-24-CS			
	A, B		■: Type T: Totem pole N: NPN open collector V: Voltage		5VDC	Axial/Radial cable type	IP50	CE	E58SS6-□-2-■-5
						Axial cable connector type			E58SS6-□-2-■-5-C
Axial connector type						IP50	CE	E58SS6-□-2-■-5-CR	
Radial connector type								E58SS6-□-2-■-5-CS	
12-24VDC		Axial/Radial cable type		IP50		CE	E58SS6-□-2-■-24		
		Axial cable connector type					E58SS6-□-2-■-24-C		
		Axial connector type		IP50	CE	E58SS6-□-2-■-24-CR			
		Radial connector type				E58SS6-□-2-■-24-CS			
		A, \bar{A} , B, \bar{B}		Line driver	5VDC	Axial/Radial cable type	IP50	—	E58SS6-□-4-L-5
						Axial cable connector type			E58SS6-□-4-L-5-C
Axial connector type						IP50	—	E58SS6-□-4-L-5-CR	
Radial connector type								E58SS6-□-4-L-5-CS	
12-24VDC	Axial/Radial cable type		IP50			—	E58SS6-□-4-L-24		
	Axial cable connector type						E58SS6-□-4-L-24-C		
	Axial connector type		IP50		—	E58SS6-□-4-L-24-CR			
	Radial connector type					E58SS6-□-4-L-24-CS			
	■: Type 2: A, B 3: A, B, Z 4: A, \bar{A} , B, \bar{B}		■: Type T: Totem pole N: NPN open collector V: Voltage		5VDC	Axial/Radial cable type	IP50	CE	E58SS6-□-■-5
						Axial cable connector type			E58SS6-□-■-5-C
Axial connector type						IP50	CE	E58SS6-□-■-5-CR	
Radial connector type								E58SS6-□-■-5-CS	
12-24VDC		Axial/Radial cable type		IP50		CE	E58SS6-□-■-24		
		Axial cable connector type					E58SS6-□-■-24-C		
		Axial connector type		IP50	CE	E58SS6-□-■-24-CR			
		Radial connector type				E58SS6-□-■-24-CS			
		A, \bar{A} , B, \bar{B} , Z, \bar{Z}		Line driver	5VDC	Axial/Radial cable type	IP50	—	E58SS6-□-6-L-5
						Axial cable connector type			E58SS6-□-6-L-5-C
Axial connector type						IP50	—	E58SS6-□-6-L-5-CR	
Radial connector type								E58SS6-□-6-L-5-CS	
12-24VDC	Axial/Radial cable type		IP50			—	E58SS6-□-6-L-24		
	Axial cable connector type						E58SS6-□-6-L-24-C		
	Axial connector type		IP50		—	E58SS6-□-6-L-24-CR			
	Radial connector type					E58SS6-□-6-L-24-CS			

Rotary Encoders


Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling

Series	Shaft Inner Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)			
					To 60	To 300	To 1500	To 8000
Incremental, Ø58mm, Hollow Shaft Type Rotary Encoder E58H Series 	Ø12mm	300kHz	5000rpm	Max. 90gf·cm (max. 0.00882N·m)	1, 2, 5, 12	—	—	—
					10, 15, 20, 23, 25, 30, 35, 40, 45, 50, 60	75, 100, 120, 125, 150, 192, 200, 240, 250, 256, 300	360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 1500	1800, 2000, 2048, 2500, 3000, 3600, 5000, 6000, 8000
Incremental, Ø58mm, Built-in Hollow Shaft Type Rotary Encoder E58HB Series 	Ø12mm	300kHz	5000rpm	Max. 90gf·cm (max. 0.00882N·m)	1, 2, 5, 12	—	—	—
					10, 15, 20, 23, 25, 30, 35, 40, 45, 50, 60	75, 100, 120, 125, 150, 192, 200, 240, 250, 256, 300	360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 1500	1800, 2000, 2048, 2500, 3000, 3600, 5000, 6000, 8000

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50	CE	E58H12-□-2-■-5
			Radial cable connector type	IP50		E58H12-□-2-■-5-C
		12-24VDC	Radial cable type	IP50	CE	E58H12-□-2-■-24
			Radial cable connector type	IP50		E58H12-□-2-■-24-C
A, \bar{A} , B, \bar{B}	Line driver	5VDC	Radial cable type	IP50	—	E58H12-□-4-L-5
			Radial cable connector type	IP50		E58H12-□-4-L-5-C
		12-24VDC	Radial cable type	IP50	—	E58H12-□-4-L-24
			Radial cable connector type	IP50		E58H12-□-4-L-24-C
■: Type T: Totem pole N: NPN open collector V: Voltage	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50	CE	E58H12-□-■-■-5
			Radial cable connector type	IP50		E58H12-□-■-■-5-C
		12-24VDC	Radial cable type	IP50	CE	E58H12-□-■-■-24
			Radial cable connector type	IP50		E58H12-□-■-■-24-C
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial cable type	IP50	—	E58H12-□-6-L-5
			Radial cable connector type	IP50		E58H12-□-6-L-5-C
		12-24VDC	Radial cable type	IP50	—	E58H12-□-6-L-24
			Radial cable connector type	IP50		E58H12-□-6-L-24-C
A, B	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial/Radial cable type	IP50	CE	E58HB12-□-2-■-5
			Axial cable connector type			E58HB12-□-2-■-5-C
			Axial connector type	IP50		E58HB12-□-2-■-5-CR
			Radial connector type			E58HB12-□-2-■-5-CS
		12-24VDC	Axial/Radial cable type	IP50	CE	E58HB12-□-2-■-24
			Axial cable connector type			E58HB12-□-2-■-24-C
			Axial connector type	IP50		E58HB12-□-2-■-24-CR
			Radial connector type			E58HB12-□-2-■-24-CS
A, \bar{A} , B, \bar{B}	Line driver	5VDC	Axial/Radial cable type	IP50	—	E58HB12-□-4-L-5
			Axial cable connector type			E58HB12-□-4-L-5-C
			Axial connector type	IP50		E58HB12-□-4-L-5-CR
			Radial connector type			E58HB12-□-4-L-5-CS
		12-24VDC	Axial/Radial cable type	IP50	—	E58HB12-□-4-L-24
			Axial cable connector type			E58HB12-□-4-L-24-C
			Axial connector type	IP50		E58HB12-□-4-L-24-CR
			Radial connector type			E58HB12-□-4-L-24-CS
■: Type T: Totem pole N: NPN open collector V: Voltage	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial/Radial cable type	IP50	CE	E58HB12-□-■-■-5
			Axial cable connector type			E58HB12-□-■-■-5-C
			Axial connector type	IP50		E58HB12-□-■-■-5-CR
			Radial connector type			E58HB12-□-■-■-5-CS
		12-24VDC	Axial/Radial cable type	IP50	CE	E58HB12-□-■-■-24
			Axial cable connector type			E58HB12-□-■-■-24-C
			Axial connector type	IP50		E58HB12-□-■-■-24-CR
			Radial connector type			E58HB12-□-■-■-24-CS
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Axial/Radial cable type	IP50	—	E58HB12-□-6-L-5
			Axial cable connector type			E58HB12-□-6-L-5-C
			Axial connector type	IP50		E58HB12-□-6-L-5-CR
			Radial connector type			E58HB12-□-6-L-5-CS
		12-24VDC	Axial/Radial cable type	IP50	—	E58HB12-□-6-L-24
			Axial cable connector type			E58HB12-□-6-L-24-C
			Axial connector type	IP50		E58HB12-□-6-L-24-CR
			Radial connector type			E58HB12-□-6-L-24-CS


Rotary Encoders


Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling

Series	Shaft Inner Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution
Incremental, Ø60mm, Hollow Shaft Type Rotary Encoder E60H Series 	Ø20mm	300kHz	6000rpm	Max. 150gf·cm (max. 0.0147N·m)	□: Type 100, 1024, 5000, 8192


Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution
Incremental, Ø68mm, Shaft Type Rotary Encoder E68S Series 	Ø15mm	180kHz	6500rpm	Max. 1.5Kgf·cm (max. 0.147N·m)	500 600 1024

※Connector standard: MS3102A20-29P

Series	Shaft Inner Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)	
					To 500	To 3200
Incremental, Ø80mm, Hollow Shaft Type Rotary Encoder E80H Series 	□: Type 30: Ø30mm 32: Ø32mm	200kHz	3600rpm	Max. 200gf·cm (max. 0.0196N·m)	60, 100, 360, 500	512, 1024, 3200

Series	Shaft Inner Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution
Incremental, Ø100mm, Hollow Shaft Type Rotary Encoder E100H Series 	Ø35mm	300kHz	3600rpm	Max. 300gf·cm (max. 0.0294N·m)	□: Type 512, 1024, 10000

※Sold separately: Connector cable

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)			
					To 45	To 250	To 1024	To 5000
Incremental, Side Mount, Shaft Type Rotary Encoder ENA Series 	Ø10mm	300kHz	5000rpm	Max. 70gf·cm (max. 0.00686N·m)	1, 2, 5	—	—	—
					10, 12, 15, 20, 23, 25, 30, 35, 40, 45	50, 60, 75, 100, 120, 150, 192, 200, 240, 250	256, 300, 360, 400, 500, 512, 600, 800, 1000, 1024	1200, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 5000

※Sold separately: Connector cable

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B, Z	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50	CE	E60H20-□-3-■-5
			Radial cable connector type	IP50	CE	E60H20-□-3-■-5-C
		12-24VDC	Radial cable type	IP50	CE	E60H20-□-3-■-24
			Radial cable connector type	IP50	CE	E60H20-□-3-■-24-C
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial cable type	IP50	—	E60H20-□-6-L-5
			Radial cable connector type	IP50	—	E60H20-□-6-L-5-C
		12-24VDC	Radial cable type	IP50	—	E60H20-□-6-L-24
			Radial cable connector type	IP50	—	E60H20-□-6-L-24-C

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial connector type	IP65	—	E68S15-500-6-L-5
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial connector type	IP65	—	E68S15-600-6-L-5
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial connector type	IP65	—	E68S15-1024-6-L-5


Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B, Z	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial cable type	IP50	CE	E80H□-□-3-■-5
			Radial cable connector type	IP50	CE	E80H□-□-3-■-5-C
		12-24VDC	Radial cable type	IP50	CE	E80H□-□-3-■-24
			Radial cable connector type	IP50	CE	E80H□-□-3-■-24-C
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial cable type	IP50	—	E80H□-□-6-L-5
			Radial cable connector type	IP50	—	E80H□-□-6-L-5-C

Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B, Z	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial connector type	IP50	CE	E100H35-□-3-■-5
		12-24VDC	Radial connector type	IP50	CE	E100H35-□-3-■-24
A, \bar{A} , B, \bar{B} , Z, \bar{Z}	Line driver	5VDC	Radial connector type	IP50	—	E100H35-□-6-L-5
		12-24VDC	Radial connector type	IP50	—	E100H35-□-6-L-24


Output Phase	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
A, B	■: Type T: Totem pole N: NPN open collector V: Voltage	12-24VDC	Radial connector type	IP50	CE	ENA-□-2-■-24
■: Type 2: A, B 3: A, B, Z	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Radial connector type	IP50	CE	ENA-□-■-5
		12-24VDC	Radial connector type	IP50	CE	ENA-□-■-24

Rotary Encoders

Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling

Series	Max. Response Frequency	Max. Allowable Revolution	Output Phase	Wheel Diameter	Gear Ratio	Number Of Pulses
Incremental, Wheel Type Rotary Encoder ENC Series 	180kHz	5000rpm	A, B	250mm	1:1	250
					4:1	100
					4:1	1
				228.6mm (0.25yd)	4:1	100
					4:1	10
					4:1	1

Series	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution	Output Phase
Incremental, Manual Handle Type Rotary Encoder ENH Series 	10kHz	200rpm (Normal), 600rpm (Peak)	Max. 1kgf-cm (max. 0.098N-m)	□: Type 25, 100	A, B
					A, \bar{A} , B, \bar{B}

Series	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution	Output Phase
Incremental, Portable Encoder with Handle Type Rotary Encoder ENHP Series 	10kHz	200rpm (Normal), 600rpm (Peak)	Max. 1kgf-cm (max. 0.098N-m)	100	A, B
					A, \bar{A} , B, \bar{B}
					A, B
					A, \bar{A} , B, \bar{B}

Min. Measurement Unit (Movement Distance Per 1-Pulse)	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
1mm	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50	CE	ENC-1-1-■-5
			Axial cable connector type	IP50	CE	ENC-1-1-■-5-C
		12-24VDC	Axial cable type	IP50	CE	ENC-1-1-■-24
			Axial cable connector type	IP50	CE	ENC-1-1-■-24-C
1cm	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50	CE	ENC-1-2-■-5
			Axial cable connector type	IP50	CE	ENC-1-2-■-5-C
		12-24VDC	Axial cable type	IP50	CE	ENC-1-2-■-24
			Axial cable connector type	IP50	CE	ENC-1-2-■-24-C
1m	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50	CE	ENC-1-3-■-5
			Axial cable connector type	IP50	CE	ENC-1-3-■-5-C
		12-24VDC	Axial cable type	IP50	CE	ENC-1-3-■-24
			Axial cable connector type	IP50	CE	ENC-1-3-■-24-C
0.01yd	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50	CE	ENC-1-4-■-5
			Axial cable connector type	IP50	CE	ENC-1-4-■-5-C
		12-24VDC	Axial cable type	IP50	CE	ENC-1-4-■-24
			Axial cable connector type	IP50	CE	ENC-1-4-■-24-C
0.1yd	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50	CE	ENC-1-5-■-5
			Axial cable connector type	IP50	CE	ENC-1-5-■-5-C
		12-24VDC	Axial cable type	IP50	CE	ENC-1-5-■-24
			Axial cable connector type	IP50	CE	ENC-1-5-■-24-C
1yd	■: Type T: Totem pole N: NPN open collector V: Voltage	5VDC	Axial cable type	IP50	CE	ENC-1-6-■-5
			Axial cable connector type	IP50	CE	ENC-1-6-■-5-C
		12-24VDC	Axial cable type	IP50	CE	ENC-1-6-■-24
			Axial cable connector type	IP50	CE	ENC-1-6-■-24-C


Click Stopper Position	Control Output	Power Supply	Connection Method	Protection Structure	Approval	Model
Normal "H"	■: Type T: Totem pole V: Voltage	5VDC	Terminal block	IP50	—	ENH-□-1-■-5
Normal "L"		5VDC	Terminal block	IP50	—	ENH-□-2-■-5
Normal "H"	■: Type T: Totem pole V: Voltage	12-24VDC	Terminal block	IP50	—	ENH-□-1-■-24
Normal "L"		12-24VDC	Terminal block	IP50	—	ENH-□-2-■-24
Normal "H"	Line driver	5VDC	Terminal block	IP50	—	ENH-□-1-L-5
Normal "L"		5VDC	Terminal block	IP50	—	ENH-□-2-L-5

Click Stopper Position	Control Output	Power Supply	Connection Method	Protection Structure	Approval	Model
Normal "H"	Totem pole	5VDC	D-SUB connector type	IP67	—	ENHP-100-1-T-5
		12-24VDC	D-SUB connector type	IP67	—	ENHP-100-1-T-24
Normal "H"	Line driver	5VDC	D-SUB connector type	IP67	—	ENHP-100-1-L-5
Normal "L"	Totem pole	5VDC	D-SUB connector type	IP67	—	ENHP-100-2-T-5
		12-24VDC	D-SUB connector type	IP67	—	ENHP-100-2-T-24
Normal "L"	Line driver	5VDC	D-SUB connector type	IP67	—	ENHP-100-2-L-5


Rotary Encoders

Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling

Mark for Absolute Type Model Name-□: Shaft Outer Diameter/Shaft Inner Diameter, □: Resolution, ■: Output Code

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)	
					To 45	To 1024
Absolute, Ø50mm, Shaft Type Rotary Encoder EP50S Series 	Ø8mm	35kHz	3000rpm	Max. 40gf·cm (max. 0.00392N·m)	6, 8, 10, 12, 16, 20, 24, 32, 40, 45	48, 64, 90, 128, 180, 256, 360, 512, 720, 1024

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)	
					To 180	To 1024
Absolute, Ø58mm, Clamping, Shaft Type Rotary Encoder EP58SC Series 	Ø10mm	35kHz	3000rpm	Max. 40gf·cm (max. 0.00392N·m)	45, 64, 90, 128, 180	256, 360, 512, 720, 1024

Absolute, Ø58mm, Synchro, Shaft Type Rotary Encoder EP58SS Series 	Ø6mm	35kHz	3000rpm	Max. 40gf·cm (max. 0.00392N·m)	45, 64, 90, 128, 180	256, 360, 512, 720, 1024
---	------	-------	---------	-----------------------------------	----------------------------------	--------------------------------------


Output Code	Rotating Direction	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
■■■: Type 1: BCD code 2: Binary code 3: Gray code	CW	NPN open collector	5VDC	Axial cable type	IP64	CE	EP50S8-□■■■F-N-5
			12-24VDC	Axial cable type	IP64	CE	EP50S8-□■■■F-N-24
		PNP open collector	5VDC	Axial cable type	IP64	CE	EP50S8-□■■■F-P-5
			12-24VDC	Axial cable type	IP64	CE	EP50S8-□■■■F-P-24
	CCW	NPN open collector	5VDC	Axial cable type	IP64	CE	EP50S8-□■■■R-N-5
			12-24VDC	Axial cable type	IP64	CE	EP50S8-□■■■R-N-24
		PNP open collector	5VDC	Axial cable type	IP64	CE	EP50S8-□■■■R-P-5
			12-24VDC	Axial cable type	IP64	CE	EP50S8-□■■■R-P-24


Output Code	Rotating Direction	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
■■■: Type 1: BCD code 2: Binary code 3: Gray code	CW	NPN open collector	5VDC	Axial cable type	IP50	CE	EP58SC10-□■■■F-N-5
			12-24VDC	Axial cable type	IP50	CE	EP58SC10-□■■■F-N-24
		PNP open collector	5VDC	Axial cable type	IP50	CE	EP58SC10-□■■■F-P-5
			12-24VDC	Axial cable type	IP50	CE	EP58SC10-□■■■F-P-24
	CCW	NPN open collector	5VDC	Axial cable type	IP50	CE	EP58SC10-□■■■R-N-5
			12-24VDC	Axial cable type	IP50	CE	EP58SC10-□■■■R-N-24
		PNP open collector	5VDC	Axial cable type	IP50	CE	EP58SC10-□■■■R-P-5
			12-24VDC	Axial cable type	IP50	CE	EP58SC10-□■■■R-P-24


■■■: Type 1: BCD code 2: Binary code 3: Gray code	CW	NPN open collector	5VDC	Axial cable type	IP50	CE	EP58SS6-□■■■F-N-5
			12-24VDC	Axial cable type	IP50	CE	EP58SS6-□■■■F-N-24
		PNP open collector	5VDC	Axial cable type	IP50	CE	EP58SS6-□■■■F-P-5
			12-24VDC	Axial cable type	IP50	CE	EP58SS6-□■■■F-P-24
	CCW	NPN open collector	5VDC	Axial cable type	IP50	CE	EP58SS6-□■■■R-N-5
			12-24VDC	Axial cable type	IP50	CE	EP58SS6-□■■■R-N-24
		PNP open collector	5VDC	Axial cable type	IP50	CE	EP58SS6-□■■■R-P-5
			12-24VDC	Axial cable type	IP50	CE	EP58SS6-□■■■R-P-24

Rotary Encoders

Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling

Series	Shaft Inner Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)	
					To 180	To 1024
Absolute, Ø58mm, Built-in Hollow Shaft Type Rotary Encoder EP58HB Series 	Ø8mm	35kHz	3000rpm	Max. 90gf·cm (max. 0.00882N·m)	45, 64, 90, 128, 180	256, 360, 512, 720, 1024

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution	Output Code
Absolute, Ø60mm, Shaft Type Rotary Encoder ENP Series 	Ø10mm	20kHz	3600rpm	Max. 500gf·cm (max. 0.049N·m)	□: Type 6, 8, 12, 16, 24	BCD code
					360	BCD code

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution	
					Single-Turn	Multi-Turn
Absolute, Ø50mm, Shaft Type Multi-Turn Rotary Encoder EPM50 Series 	Ø8mm	50kHz	3000rpm	Max. 40gf·cm (max. 0.00392N·m)	1024-division	8192-revolution
		—	3000rpm	Max. 40gf·cm (max. 0.00392N·m)	1024-division	8192-revolution


Output Code	Rotating Direction	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
■■■: Type 1: BCD code 2: Binary code 3: Gray code	CW	NPN open collector	5VDC	Axial cable type	IP50	CE	EP58HB8-□■■■F-N-5
			12-24VDC	Axial cable type	IP50	CE	EP58HB8-□■■■F-N-24
		PNP open collector	5VDC	Axial cable type	IP50	CE	EP58HB8-□■■■F-P-5
			12-24VDC	Axial cable type	IP50	CE	EP58HB8-□■■■F-P-24
	CCW	NPN open collector	5VDC	Axial cable type	IP50	CE	EP58HB8-□■■■R-N-5
			12-24VDC	Axial cable type	IP50	CE	EP58HB8-□■■■R-N-24
		PNP open collector	5VDC	Axial cable type	IP50	CE	EP58HB8-□■■■R-P-5
			12-24VDC	Axial cable type	IP50	CE	EP58HB8-□■■■R-P-24


Output Type	Rotating Direction	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
Negative logic (NPN)	CW	NPN open collector	12-24VDC	Axial cable type	IP50	—	ENP-101F-□-N
	CCW		12-24VDC	Axial cable type	IP50	—	ENP-101R-□-N
Positive logic (PNP)	CW	PNP open collector	12-24VDC	Axial cable type	IP50	—	ENP-111F-□-P
	CCW		12-24VDC	Axial cable type	IP50	—	ENP-111R-□-P
Negative logic (NPN)	CW	NPN open collector	5VDC	Axial cable type	IP50	—	ENP-100F-360-N
			12-24VDC	Axial cable type	IP50	—	ENP-101F-360-N
	CCW		5VDC	Axial cable type	IP50	—	ENP-100R-360-N
			12-24VDC	Axial cable type	IP50	—	ENP-101R-360-N
Positive logic (PNP)	CW	PNP open collector	5VDC	Axial cable type	IP50	—	ENP-110F-360-P
			12-24VDC	Axial cable type	IP50	—	ENP-111F-360-P
	CCW		5VDC	Axial cable type	IP50	—	ENP-110R-360-P
			12-24VDC	Axial cable type	IP50	—	ENP-111R-360-P


Output Code	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
Binary code	Parallel NPN open collector	12-24VDC	Axial cable type	IP64	CE	EPM50S8-1013-B-PN-24
			Radial cable type	IP50	CE	EPM50S8-1013-B-PN-24-S
Binary code	SSI (synchronous serial interface)	12-24VDC	Axial cable type	IP64	CE	EPM50S8-1013-B-S-24
			Radial cable type	IP50	CE	EPM50S8-1013-B-S-24-S


Rotary Encoders

Incremental Type Rotary Encoder / Absolute Type (Single-turn/Multi-turn/Wire-type) Rotary Encoder / Flexible Coupling

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)	
					To 90	To 1024
Magnetic Absolute, Ø50mm, Shaft Type Rotary Encoder MGA50S Series 	Ø8mm	30kHz	3000rpm	Max. 70gf·cm (max. 0.00686N·m)	32, 40, 45, 48, 64, 90	128, 180, 256, 360, 512, 720, 1024

Series	Shaft Outer Diameter	Max. Response Frequency	Max. Allowable Revolution	Starting Torque	Resolution (□: Type)	
					Single-Turn	Multi-Turn
Magnetic Absolute, Ø50mm, Multi-Turn Shaft Type Rotary Encoder MGAM50S Series 	Ø8mm	30kHz	3000rpm	Max. 70gf·cm (max. 0.00686N·m)	1024-division	8192-revolution
		—	3000rpm	Max. 70gf·cm (max. 0.00686N·m)	1024-division	8192-revolution

Series	Connection Type	Material	Max. Allowable Revolution	Max. Torque	Rated Torque
Ø19mm, Flexible Coupling ERB Series 	Clamp	Aluminum (AL 7075-T6), Alumite surface	8000rpm	1.2N·m (12.17kgf·cm)	0.6N·m (6.08kgf·cm)
	Set screw	Aluminum (AL 7075-T6), Alumite surface	20000rpm	1.2N·m (12.17kgf·cm)	0.6N·m (6.08kgf·cm)

Ø26mm, Flexible Coupling ERB Series 	Clamp	Aluminum (AL 7075-T6), Alumite surface	6000rpm	3.0N·m (30.42kgf·cm)	1.5N·m (15.21kgf·cm)
	Set screw	Aluminum (AL 7075-T6), Alumite surface	15000rpm	3.0N·m (30.42kgf·cm)	1.5N·m (15.21kgf·cm)


Output Code	Rotating Direction	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
■■■ Type 1: BCD code 2: Binary code 3: Gray code	CW	NPN open collector	5VDC	Axial cable type	IP50	CE	MGA50S8-□■■■F-N-5
			12-24VDC	Axial cable type	IP50	CE	MGA50S8-□■■■F-N-24
	CCW	NPN open collector	5VDC	Axial cable type	IP50	CE	MGA50S8-□■■■R-N-5
			12-24VDC	Axial cable type	IP50	CE	MGA50S8-□■■■R-N-24


Output Code	Rotating Direction	Control Output	Power Supply	Connection	Protection Structure	Approval	Model
Binary code	CW	Parallel NPN open collector	12-24VDC	Axial cable type	—	CE	MGAM50S8-1013-B-F-PN-24
	CCW	Parallel NPN open collector	12-24VDC	Axial cable type	—	CE	MGAM50S8-1013-B-R-PN-24
Binary code	CW	SSI (synchronous serial interface)	12-24VDC	Axial cable type	—	CE	MGAM50S8-1013-B-F-S-24
	CCW	SSI (synchronous serial interface)	12-24VDC	Axial cable type	—	CE	MGAM50S8-1013-B-R-S-24


Mounting Bolt	Mounting Torque	Min. Allowable Misalignment	Max. Allowable Misalignment	Inner Diameter of Both Ends	Protection Structure	Approval	Model
M2.5	1N·m	Ø4mm	Ø8mm	Ø4mm/Ø4mm	—	—	ERB-A-19C-04/04
				Ø4mm/Ø5mm	—	—	ERB-A-19C-04/05
				Ø4mm/Ø6mm	—	—	ERB-A-19C-04/06
				Ø5mm/Ø5mm	—	—	ERB-A-19C-05/05
				Ø5mm/Ø6mm	—	—	ERB-A-19C-05/06
				Ø6mm/Ø6mm	—	—	ERB-A-19C-06/06
M3	0.7N·m	Ø4mm	Ø8mm	Ø4mm/Ø4mm	—	—	ERB-A-19S-04/04
				Ø4mm/Ø5mm	—	—	ERB-A-19S-04/05
				Ø4mm/Ø6mm	—	—	ERB-A-19S-04/06
				Ø5mm/Ø5mm	—	—	ERB-A-19S-05/05
				Ø5mm/Ø6mm	—	—	ERB-A-19S-05/06
				Ø6mm/Ø6mm	—	—	ERB-A-19S-06/06
M3	0.7N·m	Ø5mm	Ø12mm	Ø6mm/Ø6mm	—	—	ERB-A-26C-06/06
				Ø6mm/Ø8mm	—	—	ERB-A-26C-06/08
				Ø8mm/Ø8mm	—	—	ERB-A-26C-08/08
M4	1.7N·m	Ø5mm	Ø12mm	Ø6mm/Ø6mm	—	—	ERB-A-26S-06/06
				Ø6mm/Ø8mm	—	—	ERB-A-26S-06/08
				Ø8mm/Ø8mm	—	—	ERB-A-26S-08/08
				Ø6mm/Ø10mm	—	—	ERB-A-26S-06/10
				Ø6mm/Ø12mm	—	—	ERB-A-26S-06/12









Connectors / Connector Cables/ Sensor Distribution Boxes / Sockets

Sensor Connector / Connector Cable /

Series	Number Of Pins	Power Supply	Rated Current	Terminal Retention
Sensor Connector CNE Series <Wire mount plug> 	■ Type 03: 3-pin 04: 4-pin	Max. 250VAC/DC	Max. 3.0A	Min. 1.4kgf

Sensor Connector CNE Series <Wire mount socket> 	■ Type 03: 3-pin 04: 4-pin	Max. 250VAC/DC	Max. 3.0A	Min. 1.4kgf
--	----------------------------------	----------------	-----------	-------------


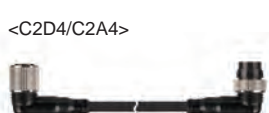
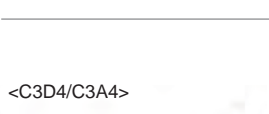
Series	Number Of Pins	Power Supply	Rated Current	Terminal Retention
Sensor Connector CNE Series <Board mount socket> 	■ Type 03: 3-pin 04: 4-pin	Max. 250VAC/DC	Max. 3.0A	Min. 1.4kgf

Appearance	Connector Standard	Connection	Connection Method	Cable Material	Cable Length (m)	Model	
Connector Cable for Photoelectric Sensor / Proximity Sensor CID/CLD Series <CID>  <CLD>  <CID>  <CLD>  <CID>  <CLD>  <CID>  <CLD> 	M12	DC 2-wire type	Socket type	PVC	2	CID2-2	
					5	CID2-5	
		DC 2-wire type (IEC standard)	Socket type		PVC	2	CLD2-2
						5	CLD2-5
	M12	DC 2-wire type	Plug type	PVC	2	CID2-2-I	
					5	CID2-5-I	
		DC 2-wire type	Plug type		PVC	2	CLD2-2-I
						5	CLD2-5-I
M12	DC 3-wire type	Socket type	PVC	2	CID3-2		
				5	CID3-5		
				2	CLD3-2		
5	CLD3-5						
M12	DC 3-wire type	Plug type	PVC	2	CID3-2P		
				2	CLD3-2P		

AWG	Nominal Cross Section Area (mm ²)	Cover Diameter (mm)	Cover Color	Model
AWG28-30	0.05 to 0.08	Ø0.6 to 0.8	Transparent	CNE-P■-WT
		Ø0.8 to 1.0	Yellow-Green	CNE-P■-YG
		Ø1.0 to 1.2	Violet	CNE-P■-VT
AWG24-26	0.13 to 0.21	Ø0.8 to 1.0	Red	CNE-P■-RE
		Ø1.0 to 1.2	Yellow	CNE-P■-YW
		Ø1.2 to 1.6	Orange	CNE-P■-OG
AWG20-22	0.32 to 0.5	Ø1.0 to 1.2	Green	CNE-P■-GN
		Ø1.2 to 1.6	Blue	CNE-P■-BL
		Ø1.6 to 2.0	Gray	CNE-P■-GY











AWG28-30	0.05 to 0.08	Ø0.6 to 0.8	Transparent	CNE-S■-WT
		Ø0.8 to 1.0	Yellow-Green	CNE-S■-YG
		Ø1.0 to 1.2	Violet	CNE-S■-VT
AWG24-26	0.13 to 0.21	Ø0.8 to 1.0	Red	CNE-S■-RE
		Ø1.0 to 1.2	Yellow	CNE-S■-YW
		Ø1.2 to 1.6	Orange	CNE-S■-OG
AWG20-22	0.32 to 0.5	Ø1.0 to 1.2	Green	CNE-S■-GN
		Ø1.2 to 1.6	Blue	CNE-S■-BL
		Ø1.6 to 2.0	Gray	CNE-S■-GY



Number Of Lines	PCB	Model
1-line		CNE-B■
2-line	Fender plated-through hole, Hole diameter: 1.0mm PCB thickness: 1.0 to 2.2mm	CNE-B2■
4-line		CNE-B4■




Appearance	Connector Standard	Connection	Connection Method	Cable Material	Cable Length (m)	Model	
Connector Connection Cable for Photoelectric Sensor / Proximity Sensor C□D/C□A Series  <C1D4/C1A4>	M12	DC type	Socket-plug type	PVC	2	C1D4-2	
					5	C1D4-5	
				Oil-resistive PVC	1	C1DH4-1	
					3	C1DH4-3	
					5	C1DH4-5	
					7	C1DH4-7	
	M12	AC type	Socket-plug type	PVC	2	C1A4-2	
					5	C1A4-5	
	 <C2D4/C2A4>	M12	DC type	Socket-plug type	PVC	2	C2D4-2
						5	C2D4-5
Oil-resistive PVC					1	C2DH4-1	
					3	C2DH4-3	
					5	C2DH4-5	
					7	C2DH4-7	
M12		AC type	Socket-plug type	PVC	2	C2A4-2	
					5	C2A4-5	
 <C3D4/C3A4>		M12	DC type	Socket-plug type	PVC	2	C3D4-2
						5	C3D4-5
	Oil-resistive PVC				1	C3DH4-1	
					3	C3DH4-3	
	M12	AC type	Socket-plug type	PVC	5	C3DH4-5	
					7	C3DH4-7	
					2	C3A4-2	
					5	C3A4-5	

Connectors / Connector Cables/ Sensor Distribution Boxes / Sockets

Sensor Connector / Connector Cable /




Appearance	Connector Standard	Connection	Connection Method	Cable Material	Cable Length (m)	Model
Connector Cable for Photoelectric Sensor / Proximity Sensor CID/CLD Series <CID>  <CLD> 	M12	DC 4-wire type	Socket type	Oil-resistive PVC	2	CIDH4-2
					3	CIDH4-3
					5	CIDH4-5
					7	CIDH4-7
					2	CLDH4-2
					3	CLDH4-3
					5	CLDH4-5
<CID>  <CLD> 	M12	DC 4-wire type	Plug type	Oil-resistive PVC	2	CIDH4-2P
					3	CIDH4-3P
					5	CIDH4-5P
					7	CIDH4-7P
					2	CLDH4-2P
					3	CLDH4-3P
					5	CLDH4-5P
<CIA>  <CLA> 	M12	AC 2-wire type	Socket type	PVC	2	CIA2-2
					5	CIA2-5
				Oil-resistive PVC	2	CIAH2-2
					5	CIAH2-5
				PVC	2	CLA2-2
					5	CLA2-5
				Oil-resistive PVC	2	CLAH2-2
					5	CLAH2-5
<CIA>  <CLA> 	M12	AC 2-wire type	Plug type	PVC	2	CIA2-2P
					5	CIA2-5P
				Oil-resistive PVC	2	CIAH2-2P
					5	CIAH2-5P
				PVC	2	CLA2-2P
					5	CLA2-5P
				Oil-resistive PVC	2	CLAH2-2P
					5	CLAH2-5P
<CID>  <CLD> 	M8	DC 4-wire type	Socket type	PVC	2	CID408-2
					5	CID408-5
					2	CLD408-2
					5	CLD408-5

Appearance	Connector Standard	Connection	Connection Method	Cable Material	Cable Length (m)	Model
Connector Connection Cable for Photoelectric Sensor / Proximity Sensor CID/CLD Series <C4D4/C4A4> 	M12	DC type	Socket-plug type	PVC	2	C4D4-2
					5	C4D4-5
				Oil-resistive PVC	1	C4DH4-1
					3	C4DH4-3
					5	C4DH4-5
					7	C4DH4-7
	M12	AC type	Socket-plug type	PVC	2	C4A4-2
5	C4A4-5					
<C1D4/C1A4> 	M12	DC type	Plug-plug type	PVC	2	C1D4-2P
					5	C1D4-5P
	M12	AC type	Plug-plug type	PVC	2	C1A4-2P
					5	C1A4-5P




Appearance	Connector Standard	Connection	Number Of Connector Pins	Connection Method	Encoder Output Type	Cable Length (m)	Model	
Connector Cable for Encoder CID Series 	M12	DC type	6	Socket type	Totem pole, NPN open collector, Voltage output	2	CID6S-2	
						5	CID6S-5	
						7	CID6S-7	
						10	CID6S-10	
						15	CID6S-15	
				9	Socket type	Line Driver	2	CID9S-2
			5	CID9S-5				
10	CID9S-10							
Connector Cable for Encoder CID Series 	M12	DC type	13	Socket type	Binary Code, Gray Code	2	CID13S-2	
						5	CID13S-5	
						10	CID13S-10	
Connector Cable for Encoder CID Series 	M17	DC type	13	Socket-plug type	CID13S-□ Connection cable	2	CID13P-2-SI	
						5	CID13P-5-SI	
						10	CID13P-10-SI	

Connectors / Connector Cables/ Sensor Distribution Boxes / Sockets

Sensor Connector / Connector Cable /

Series	Number Of Ports	Input Logic	Output Type		Power Supply	Rated Current
			1-Signal (DC 3-Wire Type)	1/2-Signal (DC 4-Wire Type)		
M12 5-Pin Connector (Cable Type) Sensor Distribution Box PT Series <PT4>  W54xH22.5xL95mm <PT6>  W54xH22.5xL120mm <PT8>  W54xH22.5xL145mm	4	NPN	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
		PNP	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
	6	NPN	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
		PNP	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
	8	NPN	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
		PNP	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)

※1. Sold separately: Mounting protection cover (CAP-PT), Waterproof cover (P96-M12-1)

Series	Number Of Ports	Input Logic	Output Type		Power Supply	Rated Current
			1-Signal (DC 3-Wire Type)	1/2-Signal (DC 4-Wire Type)		
M12 5-Pin Connector (Connector Type) Sensor Distribution Box PT-C Series <PT4-C>  W54xH31.5xL95mm <PT6-C>  W54xH31.5xL120mm <PT8-C>  W54xH31.5xL145mm	4	NPN	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
		PNP	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
	6	NPN	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
		PNP	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
	8	NPN	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)
		PNP	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)




※1. Sold separately: Mounting protection cover (CAP-PT), Waterproof cover (P96-M12-1)

Rated Current	Connection Life Cycle	Number Of M12 Connector Pins	Cable Length (m)	Protection Structure*1	Model
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT4-3DN5-5
		5	10	IP52 (mounting protection cover)	PT4-3DN5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT4-4DN5-5
		5	10	IP52 (mounting protection cover)	PT4-4DN5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT4-3DP5-5
		5	10	IP52 (mounting protection cover)	PT4-3DP5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT4-4DP5-5
		5	10	IP52 (mounting protection cover)	PT4-4DP5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT6-3DN5-5
		5	10	IP52 (mounting protection cover)	PT6-3DN5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT6-4DN5-5
		5	10	IP52 (mounting protection cover)	PT6-4DN5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT6-3DP5-5
		5	10	IP52 (mounting protection cover)	PT6-3DP5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT6-4DP5-5
		5	10	IP52 (mounting protection cover)	PT6-4DP5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT8-3DN5-5
		5	10	IP52 (mounting protection cover)	PT8-3DN5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT8-4DN5-5
		5	10	IP52 (mounting protection cover)	PT8-4DN5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT8-3DP5-5
		5	10	IP52 (mounting protection cover)	PT8-3DP5-10
Max. 0.5mA	Min. 200 operations	5	5	IP67 (waterproof cover)	PT8-4DP5-5
		5	10	IP52 (mounting protection cover)	PT8-4DP5-10


Rated Current	Connection Life Cycle	Number Of M12 Connector Pins	Protection Structure*1	Model
Max. 0.5mA	Min. 200 operations	5	IP67 (waterproof cover)	PT4-C3DN5
			IP52 (mounting protection cover)	PT4-C4DN5
Max. 0.5mA	Min. 200 operations	5	IP67 (waterproof cover)	PT4-C3DP5
			IP52 (mounting protection cover)	PT4-C4DP5
Max. 0.5mA	Min. 200 operations	5	IP67 (waterproof cover)	PT6-C3DN5
			IP52 (mounting protection cover)	PT6-C4DN5
Max. 0.5mA	Min. 200 operations	5	IP67 (waterproof cover)	PT6-C3DP5
			IP52 (mounting protection cover)	PT6-C4DP5
Max. 0.5mA	Min. 200 operations	5	IP67 (waterproof cover)	PT8-C3DN5
			IP52 (mounting protection cover)	PT8-C4DN5
Max. 0.5mA	Min. 200 operations	5	IP67 (waterproof cover)	PT8-C3DP5
			IP52 (mounting protection cover)	PT8-C4DP5

Connectors / Connector Cables/ Sensor Distribution Boxes / Sockets



Sensor Connector / Connector Cable /




Series	Number Of Ports	Input Logic	Output Type		Power Supply	Rated Current
			1-Signal (DC 2-Wire Type)	1-Signal (DC 3-Wire Type)		
M12 4-Pin Connector (Cable Type) Sensor Distribution Box PT Series <PT4>  W50xH27.5xL73mm <PT6>  W50xH27.5xL98mm <PT8>  W50xH27.5xL123mm	4	NPN	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●		
	6	NPN	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●		
	8	NPN	●	—	12-24VDC	2A (per signal), 4A (per port), 10A (total)
			—	●		
8	PNP	—	●	12-24VDC	2A (per signal), 4A (per port), 10A (total)	
		—	●			



※1. Sold separately: Mounting protection cover (CAP-PT), Waterproof cover (P96-M12-1)

Appearance	Connector Standard	Connection	Connection Method	Cable Material	Cable Length (m)	Model
Sensor Distribution Box (PT-C) M23 Connector Cable CLD Series <CLD> 	M23	DC 3-wire type	Socket type	Oil-resistive PVC	4	CLDH12C-040
					6	CLDH12C-060
					8	CLDH12C-080
		DC 4-wire type	Socket type	Oil-resistive PVC	4	CLDH19C-040
					6	CLDH19C-060
					8	CLDH19C-080

Rated Current	Connection Life Cycle	Number Of M12 Connector Pins	Cable Length (m)	Protection Structure*1	Model
Max. 0.5mA	Min. 200 operations	4	5	IP67 (waterproof cover) IP52 (mounting protection cover)	PT4-2D
		4	5	IP67 (waterproof cover) IP52 (mounting protection cover)	PT4-3DN
Max. 0.5mA	Min. 200 operations	4	5	IP67 (waterproof cover) IP52 (mounting protection cover)	PT4-3DP
Max. 0.5mA	Min. 200 operations	4	5	IP67 (waterproof cover) IP52 (mounting protection cover)	PT6-2D
		4	5	IP67 (waterproof cover) IP52 (mounting protection cover)	PT6-3DN
Max. 0.5mA	Min. 200 operations	4	5	IP67 (waterproof cover) IP52 (mounting protection cover)	PT6-3DP
Max. 0.5mA	Min. 200 operations	4	5	IP67 (waterproof cover) IP52 (mounting protection cover)	PT8-2D
		4	5	IP67 (waterproof cover) IP52 (mounting protection cover)	PT8-3DN
Max. 0.5mA	Min. 200 operations	4	5	IP67 (waterproof cover) IP52 (mounting protection cover)	PT8-3DP

Series	Number Of Pins	Rated Voltage	Rated Current	Terminal Fixing Torque	Bolt Standard	Ambient Temperature	Model
Standard Socket for Controllers PG Series <8-pin>  W38xH41xL21mm <11-pin>  W45xH43.4xL21mm	8-pin	250VAC	7A (resistive load)	0.8N·m	M3.5	-10 to 55°C	PG-08
	11-pin	250VAC	7A (resistive load)	0.8N·m	M3.5	-10 to 55°C	PG-11

Din Rail and Panel Mount Sockets for Controllers PS Series <8-pin>  W50xH70xL23.8mm <11-pin>  W50xH70xL23.8mm <8-pin>  W41xH67.5xL20mm	8-pin	250VAC	7A (resistive load)	0.8N·m	M3.5	-10 to 55°C	PS-08(N)
	11-pin	250VAC	7A (resistive load)	0.8N·m	M3.5	-10 to 55°C	PS-11(N)
	8-pin	250VAC	7A (resistive load)	0.75 to 0.95N·m	M3.5	-10 to 55°C	PS-M8

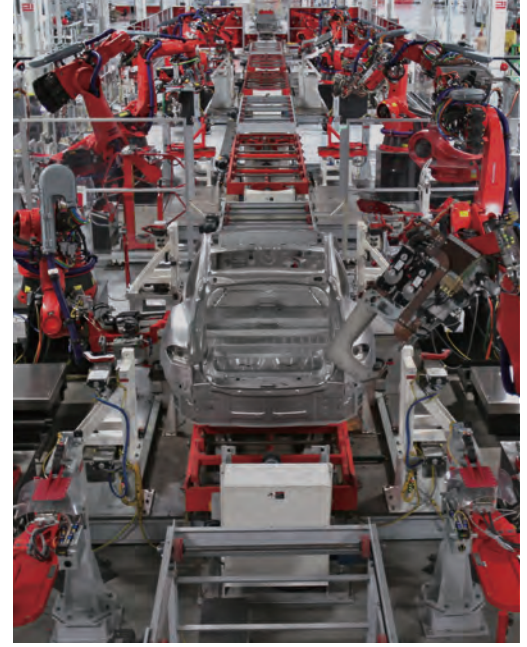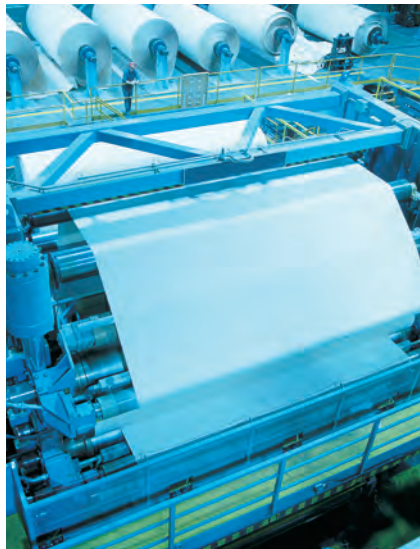

CONTROLLERS






Temperature Controllers · SSRs · Power Controllers · Counters · Timers · Panel Meters ·
Tacho / Speed / Pulse Meters · Display Units · Sensor Controllers · Switching Mode Power Supplies ·
Graphic / Logic Panels · Field Network Devices



Temperature Controllers

Series	Display Method	Control Method	Input Type	Sampling Period
High Performance, General-Purpose, PID Control Temperature Controller TK4N Series  W48×H24×L91.8mm	4-digit 7-segment LED	Heating, Cooling	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
High Performance, General-Purpose, PID Control Temperature Controller TK4SP Series (11-pin plug type)  W48×H48×L72.2mm	4-digit 7-segment LED	Heating, Cooling	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling		
		ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms

※Sold separately: 11-pin socket (PG-11, PS-11(N))







Control Output 1	Control Output 2	Option Input	Option Output	Power Supply	Protection Structure	Approval	Model
■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	—	CT	Alarm 1	100-240VAC	IP65 (front panel)		TK4N-14■N
		—	Alarm 1/2				TK4N-24■N
		Digital (DI-1/2)	Alarm 1				TK4N-D4■N
		—	Alarm1, Transmission (DC4-20mA)				TK4N-R4■N
		—	Alarm 1, RS485 comm.				TK4N-T4■N
■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	Relay (250VAC 3A)	—	Alarm 2	100-240VAC	IP65 (front panel)		TK4N-14■R
		Digital (DI-1/2)	—				TK4N-D4■R
		—	Transmission (DC4-20mA)				TK4N-R4■R
		—	RS485 comm.				TK4N-T4■R
■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	—	Alarm 2	100-240VAC	IP65 (front panel)		TK4N-14■C
		Digital (DI-1/2)	—				TK4N-D4■C
		—	Transmission (DC4-20mA)				TK4N-R4■C
		—	RS485 comm.				TK4N-T4■C
■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	—	—	Alarm 1	24VAC, 24-48VDC	IP50 (front panel)		TK4SP-12■N
	Relay (250VAC 3A)						TK4SP-12■R
	Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]						TK4SP-12■C
■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	—	—	Alarm 1	100-240VAC	IP50 (front panel)		TK4SP-14■N
	Relay (250VAC 3A)						TK4SP-14■R
	Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]						TK4SP-14■C

Temperature Controllers

Series	Display Method	Control Method	Input Type	Sampling Period	
High Performance, General-Purpose, PID Control Temperature Controller TK4S Series	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms



W48×H48×64.5mm

Control Output 1	Control Output 2	Option Input	Option Output	Power Supply	Protection Structure	Approval	Model						
<p>■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	—	CT, Digital (DI-1)	Alarm 1	24VAC, 24-48VDC	IP65 (front panel)		TK4S-12■N						
			Alarm 1/2				TK4S-22■N						
			Alarm1, Transmission (DC4-20mA)				TK4S-R2■N						
			Alarm 1, RS485 comm.				TK4S-T2■N						
			Alarm 1/2, Transmission (DC4-20mA)				TK4S-A2■N						
			Alarm 1/2, RS485 comm.				TK4S-B2■N						
<p>■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Relay (250VAC 3A)	CT, Digital (DI-1)	Alarm 1	24VAC, 24-48VDC	IP65 (front panel)		TK4S-12■R						
			Alarm 1/2				TK4S-22■R						
			Alarm1, Transmission (DC4-20mA)				TK4S-R2■R						
			Alarm 1, RS485 comm.				TK4S-T2■R						
			Alarm 1/2, Transmission (DC4-20mA)				TK4S-A2■R						
			Alarm 1/2, RS485 comm.				TK4S-B2■R						
<p>■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	CT, Digital (DI-1)	Alarm 1	24VAC, 24-48VDC	IP65 (front panel)		TK4S-12■C						
			Alarm 1/2				TK4S-22■C						
			Alarm1, Transmission (DC4-20mA)				TK4S-R2■C						
			Alarm 1, RS485 comm.				TK4S-T2■C						
			Alarm 1/2, Transmission (DC4-20mA)				TK4S-A2■C						
			Alarm 1/2, RS485 comm.				TK4S-B2■C						
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	—	CT, Digital (DI-1)	Alarm 1	100-240VAC	IP65 (front panel)		TK4S-14■N						
			Alarm 1/2				TK4S-24■N						
			Alarm1, Transmission (DC4-20mA)				TK4S-R4■N						
			Alarm 1, RS485 comm.				TK4S-T4■N						
			Alarm 1/2, Transmission (DC4-20mA)				TK4S-A4■N						
		Alarm 1/2, RS485 comm.	TK4S-B4■N										
		CT, Digital (DI-1/2)	Alarm 1/2				TK4S-D4■N						
			<p>■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>				Relay (250VAC 3A)	CT, Digital (DI-1)	Alarm 1	100-240VAC	IP65 (front panel)		TK4S-14■R
									Alarm 1/2				TK4S-24■R
									Alarm1, Transmission (DC4-20mA)				TK4S-R4■R
Alarm 1, RS485 comm.	TK4S-T4■R												
Alarm 1/2, Transmission (DC4-20mA)	TK4S-A4■R												
Alarm 1/2, RS485 comm.	TK4S-B4■R												
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	CT, Digital (DI-1)	Alarm 1	100-240VAC	IP65 (front panel)		TK4S-14■C						
			Alarm 1/2				TK4S-24■C						
			Alarm1, Transmission (DC4-20mA)				TK4S-R4■C						
			Alarm 1, RS485 comm.				TK4S-T4■C						
			Alarm 1/2, Transmission (DC4-20mA)				TK4S-A4■C						
			Alarm 1/2, RS485 comm.				TK4S-B4■C						

Temperature Controllers




Series	Display Method	Control Method	Input Type	Sampling Period	
High Performance, General-Purpose, PID Control Temperature Controller TK4M Series	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platine II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platine II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platine II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platine II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platine II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platine II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platine II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
		Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platine II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms









W72×H72×L64.5mm








Control Output 1	Control Output 2	Option Input	Option Output	Power Supply	Protection Structure	Approval	Model
<p>■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	—	CT, Digital (DI-1)	Alarm 1	24VAC, 24-48VDC	IP65 (front panel)		TK4M-12■N
			Alarm 1/2				TK4M-22■N
			Alarm1, Transmission (DC4-20mA)				TK4M-R2■N
			Alarm 1, RS485 comm.				TK4M-T2■N
			Alarm 1/2, Transmission (DC4-20mA)				TK4M-A2■N
			Alarm 1/2, RS485 comm.				TK4M-B2■N
<p>■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Relay (250VAC 3A)	CT, Digital (DI-1)	Alarm 1	24VAC, 24-48VDC	IP65 (front panel)		TK4M-12■R
			Alarm 1/2				TK4M-22■R
			Alarm1, Transmission (DC4-20mA)				TK4M-R2■R
			Alarm 1, RS485 comm.				TK4M-T2■R
			Alarm 1/2, Transmission (DC4-20mA)				TK4M-A2■R
			Alarm 1/2, RS485 comm.				TK4M-B2■R
<p>■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	CT, Digital (DI-1)	Alarm 1	24VAC, 24-48VDC	IP65 (front panel)		TK4M-12■C
			Alarm 1/2				TK4M-22■C
			Alarm1, Transmission (DC4-20mA)				TK4M-R2■C
			Alarm 1, RS485 comm.				TK4M-T2■C
			Alarm 1/2, Transmission (DC4-20mA)				TK4M-A2■C
			Alarm 1/2, RS485 comm.				TK4M-B2■C
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	—	CT, Digital (DI-1)	Alarm 1	100-240VAC	IP65 (front panel)		TK4M-14■N
			Alarm 1/2				TK4M-24■N
			Alarm1, Transmission (DC4-20mA)				TK4M-R4■N
			Alarm 1, RS485 comm.				TK4M-T4■N
			Alarm 1/2, Transmission (DC4-20mA)				TK4M-A4■N
			Alarm 1/2, RS485 comm.				TK4M-B4■N
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Relay (250VAC 3A)	CT, Digital (DI-1)	Alarm 1	100-240VAC	IP65 (front panel)		TK4M-14■R
			Alarm 1/2				TK4M-24■R
			Alarm1, Transmission (DC4-20mA)				TK4M-R4■R
			Alarm 1, RS485 comm.				TK4M-T4■R
			Alarm 1/2, Transmission (DC4-20mA)				TK4M-A4■R
			Alarm 1/2, RS485 comm.				TK4M-B4■R
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	CT, Digital (DI-1)	Alarm 1	100-240VAC	IP65 (front panel)		TK4M-14■C
			Alarm 1/2				TK4M-24■C
			Alarm1, Transmission (DC4-20mA)				TK4M-R4■C
			Alarm 1, RS485 comm.				TK4M-T4■C
			Alarm 1/2, Transmission (DC4-20mA)				TK4M-A4■C
			Alarm 1/2, RS485 comm.				TK4M-B4■C

Temperature Controllers

Series	Size	Display Method	Control Method	Input Type	Sampling Period
High Performance, General-Purpose, PID Control Temperature Controller  TK4W Series W96×H48×L64.5mm  TK4H Series W48×H96×L64.5mm  TK4L Series W96×H96×L64.5mm	□: Type W: DIN W96×H48mm H: DIN W48×H96mm L: DIN W96×H96mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PID control Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
			Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
			Heating, Cooling	ON/OFF control, P, PI, PD, PID control Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
			Heating, Cooling	ON/OFF control, P, PI, PD, PID control Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
			Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
			Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
			Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms
			Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPt100Ω, DPt50Ω, JPt100Ω, Cu100Ω, Cu50Ω, Nikel 120Ω Analog: 0-100mV, 0-5V, 1-5V, 0-10V 0-20mA, 4-20mA	50ms

Control Output 1	Control Output 2	Option Input	Option Output	Power Supply	Protection Structure	Approval	Model
<p>■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	—	CT, Digital (DI-1/2)	Alarm 1	24VAC, 24-48VDC	IP65 (front panel)		TK4□-12■N
			Alarm 1/2				TK4□-22■N
			Alarm1, Transmission (DC4-20mA)				TK4□-R2■N
			Alarm 1, RS485 comm.				TK4□-T2■N
			Alarm 1/2, Transmission (DC4-20mA)				TK4□-A2■N
			Alarm 1/2, RS485 comm.				TK4□-B2■N
<p>■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Relay (250VAC 3A)	CT, Digital (DI-1/2)	Alarm 1	24VAC, 24-48VDC	IP65 (front panel)		TK4□-12■R
			Alarm 1/2				TK4□-22■R
			Alarm1, Transmission (DC4-20mA)				TK4□-R2■R
			Alarm 1, RS485 comm.				TK4□-T2■R
			Alarm 1/2, Transmission (DC4-20mA)				TK4□-A2■R
			Alarm 1/2, RS485 comm.				TK4□-B2■R
<p>■: Type R: Relay (250VAC 3A) C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	CT, Digital (DI-1/2)	Alarm 1	24VAC, 24-48VDC	IP65 (front panel)		TK4□-12■C
			Alarm 1/2				TK4□-22■C
			Alarm1, Transmission (DC4-20mA)				TK4□-R2■C
			Alarm 1, RS485 comm.				TK4□-T2■C
			Alarm 1/2, Transmission (DC4-20mA)				TK4□-A2■C
			Alarm 1/2, RS485 comm.				TK4□-B2■C
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	—	CT, Digital (DI-1/2)	Alarm 1	100-240VAC	IP65 (front panel)		TK4□-14■N
			Alarm 1/2				TK4□-24■N
			Alarm1, Transmission (DC4-20mA)				TK4□-R4■N
			Alarm 1, RS485 comm.				TK4□-T4■N
			Alarm 1/2, Transmission (DC4-20mA)				TK4□-A4■N
			Alarm 1/2, RS485 comm.				TK4□-B4■N
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Relay (250VAC 3A)	CT, Digital (DI-1/2)	Alarm 1	100-240VAC	IP65 (front panel)		TK4□-14■R
			Alarm 1/2				TK4□-24■R
			Alarm1, Transmission (DC4-20mA)				TK4□-R4■R
			Alarm 1, RS485 comm.				TK4□-T4■R
			Alarm 1/2, Transmission (DC4-20mA)				TK4□-A4■R
			Alarm 1/2, RS485 comm.				TK4□-B4■R
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (11VDC) [ON/OFF, phase, cycle] C: Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]</p>	Current (DC0/4-20mA) or SSR drive (11VDC) [ON/OFF]	CT, Digital (DI-1/2)	Alarm 1	100-240VAC	IP65 (front panel)		TK4□-14■C
			Alarm 1/2				TK4□-24■C
			Alarm1, Transmission (DC4-20mA)				TK4□-R4■C
			Alarm 1, RS485 comm.				TK4□-T4■C
			Alarm 1/2, Transmission (DC4-20mA)				TK4□-A4■C
			Alarm 1/2, RS485 comm.				TK4□-B4■C



Temperature Controllers




Series	Size	Display Method	Control Method	Input Type	Sampling Period			
Single Display, PID Control Temperature Controller								
TC4S Series  W48×H48×L64.5mm	□: Type S: DIN W48×H48mm M: DIN W72×H72mm W: DIN W96×H48mm H: DIN W48×H96mm L: DIN W96×H96mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), L(IC) RTD: DPt100Ω, Cu50Ω	100ms		
TC4M Series  W72×H72×L64.5mm			Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), L(IC) RTD: DPt100Ω, Cu50Ω	100ms		
TC4W Series  W96×H48×L64.5mm			Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), L(IC) RTD: DPt100Ω, Cu50Ω	100ms		
TC4H Series  W48×H96×L64.5mm			Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), L(IC) RTD: DPt100Ω, Cu50Ω	100ms		
TC4L Series  W96×H96×L64.5mm			Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), L(IC) RTD: DPt100Ω, Cu50Ω	100ms		
TC4S Series  W48×H48×L72.2mm			□: Type SP: DIN W48×H48mm Y: DIN W72×H36mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), L(IC) RTD: DPt100Ω, Cu50Ω	100ms
TC4Y Series  W72×H36×L77mm			Heating, Cooling		ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), L(IC) RTD: DPt100Ω, Cu50Ω	100ms	

※Sold separately: 11-pin socket (PG-11, PS-11(N))

Control Output	Option Output	Power Supply	Protection Structure	Approval	Model
Indicator	—	24VAC, 24-48VDC	—	CE C  US	TC4□-N2N
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF]	—	24VAC, 24-48VDC	—	CE C  US	TC4□-N2R
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF]	Alarm 1	24VAC, 24-48VDC	—	CE C  US	TC4□-12R
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF]	Alarm 1/2	24VAC, 24-48VDC	—	CE C  US	TC4□-22R
Indicator	—	100-240VAC	—	CE C  US	TC4□-N4N
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF, phase, cycle]	—	100-240VAC	—	CE C  US	TC4□-N4R
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF, phase, cycle]	Alarm 1	100-240VAC	—	CE C  US	TC4□-14R
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF, phase, cycle]	Alarm 1/2	100-240VAC	—	CE C  US	TC4□-24R
Indicator	—	24VAC, 24-48VDC	—	CE C  US	TC4□-N2N
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF]	—	24VAC, 24-48VDC	—	CE C  US	TC4□-N2R
	Alarm 1	24VAC, 24-48VDC	—	CE C  US	TC4□-12R
Indicator	—	100-240VAC	—	CE C  US	TC4□-N4N
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF, phase, cycle]	—	100-240VAC	—	CE C  US	TC4□-N4R
	Alarm 1	100-240VAC	—	CE C  US	TC4□-14R

Temperature Controllers


Series	Display Method	Control Method	Input Type	Sampling Period	
Dual Display, PID Control Temperature Controller TCN4S Series  W48×H48×L64.5mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), T(CC), R(PR), S(PR), L(IC) RTD: DPt100Ω, Cu50Ω	100ms
Dual Display, PID Control Temperature Controller TCN4S-□-P (connector-plug type)  W48×H48×L67.5mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), T(CC), R(PR), S(PR), L(IC) RTD: DPt100Ω, Cu50Ω	100ms



Series	Display Method	Control Method	Input Type	Sampling Period	
Dual Display, PID Control Temperature Controller TCN4M Series  W72×H72×L64.5mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), T(CC), R(PR), S(PR), L(IC) RTD: DPt100Ω, Cu50Ω	100ms
TCN4H Series  W48×H96×L64.5mm					
TCN4L Series  W96×H96×L64.5mm		Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), T(CC), R(PR), S(PR), L(IC) RTD: DPt100Ω, Cu50Ω	100ms

Control Output	Option Output	Power Supply	Protection Structure	Approval	Model
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF]	Alarm 1/2	24VAC, 24-48VDC	—	CE C RU US	TCN4S-22R
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF, phase, cycle]	Alarm 1/2	100-240VAC	—	CE C RU US	TCN4S-24R
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF]	Alarm 1/2	24VAC, 24-48VDC	—	CE C RU US	TCN4S-22R-P
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF, phase, cycle]	Alarm 1/2	100-240VAC	—	CE C RU US	TCN4S-24R-P


Control Output	Option Output	Power Supply	Protection Structure	Approval	Model
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF]	Alarm 1/2	24VAC, 24-48VDC	—	CE C RU US	TCN4M-22R
					TCN4H-22R
					TCN4L-22R
Relay (250VAC 3A) or SSR drive (12VDC) [ON/OFF, phase, cycle]	Alarm 1/2	100-240VAC	—	CE C RU US	TCN4M-24R
					TCN4H-24R
					TCN4L-24R

Temperature Controllers

Series	Display Method	Control Method	Input Type	Sampling Period	
LCD Display PID Control Temperature Controller TX4S Series  W48×H48×L45mm	4-digit 11-segment LCD	Heating, Cooling	ON/OFF control, P, PI, PD, PID control	Thermocouple: K(CA), J(IC), T(CC), R(PR), S(PR), L(IC) RTD: DPT100Ω, Cu50Ω	50ms

Series	Display Method	Control Method	Input CH	Input Type	Sampling Period	
2-CH Modular Type, PID Control Temperature Controller TM2 Series  W30×H100×L84.8mm	Non-display	Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	2-CH	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPT100Ω, JPt100Ω	50ms (2-CH synchronous sampling)
2-CH Modular Type, PID Control Temperature Controller TM4 Series  W30×H100×L84.8mm	Non-display	Heating, Cooling Heating& Cooling	ON/OFF control, P, PI, PD, PID control	4-CH	Thermocouple: K(CA), J(IC), E(CR), T(CC), B(PR), R(PR), S(PR), N(NN), C(TT), G(TT), L(IC), U(CC), Platinel II RTD: DPT100Ω, JPt100Ω	100ms (4-CH synchronous sampling)

※1. Expansion units (TM□□-□2□E) of TM2/4 Series (2/4-CH modular type) are available to order separately.


Series	Display Method	Control Method	Input Type	Sampling Period	
Board Type, Dual PID Control Temperature Controller TB42 Series  [display part: W60×H60mm] [control part: W65×H78mm]	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PIDF, PIDS control	Thermocouple: K(CA), J(IC) RTD: DPT100Ω, JPt100Ω	500ms

Control Output	Option Output	Power Supply	Protection Structure	Approval	Model
Relay (250VAC 3A)	Alarm 1	100-240VAC	IP50 (front panel)		TX4S-14R
SSR drive (12VDC) [ON/OFF, phase, cycle]					TX4S-14S
Current (DC0/4-20mA) or SSR drive (12VDC) [ON/OFF]					TX4S-14C
Relay (250VAC 3A)	Alarm 1/2	100-240VAC	IP50 (front panel)		TX4S-24R
SSR drive (12VDC) [ON/OFF, phase, cycle]					TX4S-24S
Current (DC0/4-20mA) or SSR drive (12VDC) [ON/OFF]					TX4S-24C
Relay (250VAC 3A)	Alarm 1/2, Transmission (DC4-20mA)	100-240VAC	IP50 (front panel)		TX4S-A4R
SSR drive (12VDC) [ON/OFF, phase, cycle]					TX4S-A4S
Current (DC0/4-20mA) or SSR drive (12VDC) [ON/OFF]					TX4S-A4C
Relay (250VAC 3A)	Alarm 1/2, RS485 comm.	100-240VAC	IP50 (front panel)		TX4S-B4R
SSR drive (12VDC) [ON/OFF, phase, cycle]					TX4S-B4S
Current (DC0/4-20mA) or SSR drive (12VDC) [ON/OFF]					TX4S-B4C


Control Output	Option Input	Option Output	Module Type	Power Supply	Protection Structure	Approval	Model
Relay (250VAC 3A)	CT, Digital (DI-1/2)	Alarm 1/2, RS485 comm.	Basic module*1	24VDC	—		TM2-22RB
Current (DC0/4-20mA) or SSR drive (12VDC) [ON/OFF]	CT, Digital (DI-1/2)	Alarm 1/2, RS485 comm.	Basic module*1	24VDC	—		TM2-22CB
Relay (250VAC 3A)	CT, Digital (DI-1/2)	Alarm 1/2/3/4, RS485 comm.	Basic module*1	24VDC	—		TM2-42RB
Current (DC0/4-20mA) or SSR drive (12VDC) [ON/OFF]	CT, Digital (DI-1/2)	Alarm 1/2/3/4, RS485 comm.	Basic module*1	24VDC	—		TM2-42CB
Relay (250VAC 3A)	—	RS485 comm.	Basic module*1	24VDC	—		TM4-N2RB
SSR drive (22VDC) [ON/OFF]	—	RS485 comm.	Basic module*1	24VDC	—		TM4-N2SB




Control Output	Option Output	Power Supply	Protection Structure	Approval	Model
Relay (250VAC 3A)	Event 1 (relay)/ Event 2 (LED)	100-240VAC	—		TB42-14R
SSR drive (12VDC) [ON/OFF]	Event 1 (relay)/ Event 2 (LED)	100-240VAC	—		TB42-14S
Current (DC4-20mA)	Event 1 (relay)/ Event 2 (LED)	100-240VAC	—		TB42-14C
PV transmission (DC4-20mA)	Event 2 (LED)	100-240VAC	—		TB42-14N

Temperature Controllers

Series	Display Method	Control Method	Input Type	Sampling Period
Dual PID Control Temperature Controller TZ4SP Series (11-pin plug type)  W48×H48×L97.3mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PIDF, PIDS control Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms


※Sold separately: 11-pin socket (PG-11, PS-11(N))





Dual PID Control Temperature Controller TZ4ST Series  W48×H48×L98.8mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PIDF, PIDS control Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms
Heating, Cooling		ON/OFF control, P, PI, PD, PIDF, PIDS control Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms	




Series	Display Method	Control Method	Input Type	Sampling Period
Dual PID Control Temperature Controller TZ4M Series  W72×H72×L100mm TZ4W Series  W96×H48×L100mm TZ4H Series  W48×H96×L100mm TZ4L Series  W96×H96×L100mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PIDF, PIDS control Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms
Heating, Cooling		ON/OFF control, P, PI, PD, PIDF, PIDS control Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms	
Heating, Cooling		ON/OFF control, P, PI, PD, PIDF, PIDS control Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms	
Heating, Cooling		ON/OFF control, P, PI, PD, PIDF, PIDS control Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms	
Heating, Cooling		ON/OFF control, P, PI, PD, PIDF, PIDS control Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms	
Heating, Cooling		ON/OFF control, P, PI, PD, PIDF, PIDS control Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms	







Control Output	Option Output	Power Supply	Protection Structure	Approval	Model
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Event 1	24VAC, 24-48VDC	—	CE	TZ4SP-12■
		100-240VAC	—	CE C RU US	TZ4SP-14■
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Event 1	24VAC, 24-48VDC	—	CE	TZ4ST-12■
	Event 1/2				TZ4ST-22■
	Event 1, PV transmission (DC4-20mA)				TZ4ST-R2■
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Event 1	100-240VAC	—	CE C RU US	TZ4ST-14■
	Event 1/2				TZ4ST-24■
	Event 1, PV transmission (DC4-20mA)				TZ4ST-R4■
Control Output	Option Output	Power Supply	Protection Structure	Approval	Model
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Event 1	100-240VAC	—	CE C RU US	TZ4M-14■
					TZ4W-14■
					TZ4H-14■
					TZ4L-14■
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Event 1/2	100-240VAC	—	CE C RU US	TZ4M-24■
					TZ4W-24■
					TZ4H-24■
					TZ4L-24■
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Event 1, PV transmission (DC4-20mA)	100-240VAC	—	CE C RU US	TZ4M-R4■
					TZ4W-R4■
					TZ4H-R4■
					TZ4L-R4■
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Event 1/2, PV transmission (DC4-20mA)	100-240VAC	—	CE C RU US	TZ4M-A4■
					TZ4W-A4■
					TZ4H-A4■
					TZ4L-A4■
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Event 1, RS485 comm.	100-240VAC	—	CE C RU US	TZ4M-T4■
					TZ4W-T4■
					TZ4H-T4■
					TZ4L-T4■
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Event 1/2, RS485 comm.	100-240VAC	—	CE C RU US	TZ4M-B4■
					TZ4W-B4■
					TZ4H-B4■
					TZ4L-B4■

Temperature Controllers




Series	Display Method	Control Method	Input Type	Sampling Period	
Dual PID Control Temperature Controller TZN4S Series  W48×H48×L90mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PIDF, PIDS control	Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms

Series	Display Method	Control Method	Input Type	Sampling Period	
Dual PID Control Temperature Controller TZN4M Series  W72×H72×L73mm	4-digit 7-segment LED	Heating, Cooling	ON/OFF control, P, PI, PD, PIDF, PIDS control	Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms
TZN4W Series  W96×H48×L100mm		Heating, Cooling	ON/OFF control, P, PI, PD, PIDF, PIDS control	Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms
TZN4H Series  W48×H96×L100mm		Heating, Cooling	ON/OFF control, P, PI, PD, PIDF, PIDS control	Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms
TZN4L Series  W96×H96×L100mm		Heating, Cooling	ON/OFF control, P, PI, PD, PIDF, PIDS control	Thermocouple: K(CA), J(IC), E(CR), T(CC), R(PR), S(PR), N(NN), W(TT) RTD: DPt100Ω, JPt100Ω Analog: 1-5VDC, 0-10VDC, DC4-20mA	500ms

Control Output	Option Output	Power Supply	Protection Structure	Approval	Model
Relay (250VAC 3A)	Event 1	100-240VAC	—	CE C  US	TZN4S-14R
SSR drive (12VDC) [ON/OFF]	Event 1	100-240VAC	—	CE C  US	TZN4S-14S
Current (DC4-20mA)	Event 1	100-240VAC	—	CE C  US	TZN4S-14C







Control Output	Option Output	Power Supply	Protection Structure	Approval	Model
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)</p>	Event 1	100-240VAC	—	CE C  US	TZN4M-14■
					TZN4W-14■
					TZN4H-14■
					TZN4L-14■
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)</p>	Event 1/2	100-240VAC	—	CE C  US	TZN4M-24■
					TZN4W-24■
					TZN4H-24■
					TZN4L-24■
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)</p>	Event 1, PV transmission (DC4-20mA)	100-240VAC	—	CE C  US	TZN4M-R4■
					TZN4W-R4■
					TZN4H-R4■
					TZN4L-R4■
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)</p>	Event 1/2, PV transmission (DC4-20mA)	100-240VAC	—	CE C  US	TZN4M-A4■
					TZN4W-A4■
					TZN4H-A4■
					TZN4L-A4■
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)</p>	Event 1, RS485 comm.	100-240VAC	—	CE C  US	TZN4M-T4■
					TZN4W-T4■
					TZN4H-T4■
					TZN4L-T4■
<p>■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)</p>	Event 1/2, RS485 comm.	100-240VAC	—	CE C  US	TZN4M-B4■
					TZN4W-B4■
					TZN4H-B4■
					TZN4L-B4■

Temperature Controllers


Series	Size	Display Method	Control Method	Input Type	Temperature Unit	Setting Range
Analog, Non-Display, PID Control Temperature Controller TAS Series (8-pin plug type)  W48×H48×L66.7mm TAM Series  W72×H72×L64.5mm TAL Series  W96×H96×L64.5mm		Non-display	Heating	ON/OFF control PID control	Thermocouple: K(CA)	°C
						0 to 100
						0 to 200
						0 to 400
						0 to 600
						0 to 800
						0 to 1,200
						32 to 212
						32 to 392
						32 to 752
						32 to 1,112
						32 to 1,472
			32 to 2,192			
			°F	0 to 200		
				0 to 300		
				0 to 400		
				32 to 392		
				32 to 572		
32 to 752						
Heating	ON/OFF control PID control	RTD: DPt100Ω	°C	-50 to 100		
			0 to 100			
			0 to 200			
			0 to 400			
			-58 to 212			
			32 to 212			
			32 to 392			
			32 to 752			
			°F	0 to 200		
				0 to 300		
				0 to 400		
				32 to 392		
32 to 572						
32 to 752						

□: Type
 S: DIN W48×H48mm
 M: DIN W72×H72mm
 L: DIN W96×H96mm

※Sold separately: 8-pin socket (PG-8, PS-8(N))






Sampling Period	Control Output	Power Supply	Protection Structure	Approval	Model
100ms	■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	100-240VAC	—		TA□-B4■K1C
					TA□-B4■K2C
					TA□-B4■K4C
					TA□-B4■K6C
					TA□-B4■K8C
					TA□-B4■KCC
100ms	■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	100-240VAC	—		TA□-B4■K1F
					TA□-B4■K2F
					TA□-B4■K4F
					TA□-B4■K6F
					TA□-B4■K8F
					TA□-B4■KCF
100ms	■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	100-240VAC	—		TA□-B4■J2C
					TA□-B4■J3C
					TA□-B4■J4C
100ms	■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	100-240VAC	—		TA□-B4■J2F
					TA□-B4■J3F
					TA□-B4■J4F
100ms	■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	100-240VAC	—		TA□-B4■P0C
					TA□-B4■P1C
					TA□-B4■P2C
					TA□-B4■P4C
100ms	■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	100-240VAC	—		TA□-B4■P0F
					TA□-B4■P1F
					TA□-B4■P2F
					TA□-B4■P4F

Temperature Controllers

Series	Display Method	Control Method	Input Type	Temperature Unit	Setting Range
Analog, Non-Display Type Temperature Controller TOS Series (8-pin plug type)  W48×H48×L79mm	Non-display	Heating	ON/OFF control, P control	Thermocouple: K(CA)	°C
					0 to 100
					0 to 200
					0 to 300
					0 to 400
					0 to 600
		Heating	ON/OFF control, P control	Thermocouple: J(IC)	°C
					0 to 100
					0 to 200
					0 to 300
					0 to 400
					0 to 600
Heating	ON/OFF control, P control	RTD: DPt100Ω	°C		
			0 to 60		
			0 to 100		
			0 to 200		
			0 to 300		
			0 to 400		
		Heating	ON/OFF control, P control	Thermocouple: K(CA)	°F
					0 to 400
					0 to 600
					0 to 600
					0 to 800
					0 to 1000
		Heating	ON/OFF control, P control	Thermocouple: J(IC)	°F
					0 to 200
					0 to 400
					0 to 600
					0 to 800
					0 to 1000
Heating	ON/OFF control, P control	RTD: DPt100Ω	°C		
			0 to 60		
			0 to 100		
			0 to 200		
			0 to 300		
			0 to 400		
				°F	
				0 to 400	

※Sold separately: 8-pin socket (PG-8, PS-8(N))

Series	Size	Display Method	Control Method	Input Type	Temperature Unit	Setting Range
Analog, Non-Display Type Temperature Controller TOM Series  W72×H72×L112mm TOL Series  W96×H96×L100mm	□: Type M: DIN W72×H72mm L: DIN W96×H96mm	Non-display	Heating	ON/OFF control	Thermocouple: K(CA)	°C
						0 to 100
						0 to 200
						0 to 300
						0 to 400
						0 to 600
			Heating	ON/OFF control	Thermocouple: J(IC)	°C
						0 to 800
						0 to 1200
						0 to 100
						0 to 200
						0 to 300
Heating	ON/OFF control	RTD: DPt100Ω	°C			
			0 to 400			
			0 to 100			
			0 to 200			
			0 to 300			
			0 to 400			
Heating	P control	Thermocouple: K(CA)	°C			
			0 to 100			
			0 to 200			
			0 to 300			
			0 to 400			
			0 to 600			
Heating	P control	Thermocouple: J(IC)	°C			
			0 to 800			
			0 to 1200			
			0 to 100			
			0 to 200			
			0 to 300			
Heating	P control	RTD: DPt100Ω	°C			
			0 to 400			
			0 to 100			
			0 to 200			
			0 to 300			
			0 to 400			

Control Output	Power Supply	Protection Structure	Approval	Model
■: Type R: Relay (250VAC 2A) S: SSR drive (12VDC) [ON/OFF]	100-240VAC	—		TOS-B4■K1C
				TOS-B4■K2C
				TOS-B4■K3C
				TOS-B4■K4C
				TOS-B4■K6C
				TOS-B4■K8C
				TOS-B4■KCC
Relay (250VAC 2A)	100-240VAC	—		TOS-B4RK4F
Relay (250VAC 2A)				TOS-B4RK6F
SSR drive (12VDC) [ON/OFF]				TOS-B4SK6F
Relay (250VAC 2A)				TOS-B4RK8F
SSR drive (12VDC) [ON/OFF]				TOS-B4SKAF
■: Type R: Relay (250VAC 2A) S: SSR drive (12VDC) [ON/OFF]	100-240VAC	—		TOS-B4■J1C
				TOS-B4■J2C
				TOS-B4■J3C
				TOS-B4■J4C
				TOS-B4■J6C
Relay (250VAC 2A)	100-240VAC	—		TOS-B4RJ2F
■: Type R: Relay (250VAC 2A) S: SSR drive (12VDC) [ON/OFF]				TOS-B4■J4F
				TOS-B4■J6F
				TOS-B4■J8F
Relay (250VAC 2A)	100-240VAC	—		TOS-B4RJAF
■: Type R: Relay (250VAC 2A) S: SSR drive (12VDC) [ON/OFF]				TOS-B4RPXC
				TOS-B4■P1C
				TOS-B4■P2C
				TOS-B4■P3C
Relay (250VAC 2A)				TOS-B4■P4C
				TOS-B4RP4F

Control Output	Power Supply	Protection Structure	Approval	Model
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	110/220VAC	—	—	TO□-F3■K1C
				TO□-F3■K2C
				TO□-F3■K3C
				TO□-F3■K4C
				TO□-F3■K6C
				TO□-F3■K8C
				TO□-F3■KCC
				■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]
TO□-F3■J2C				
TO□-F3■J3C				
TO□-F3■J4C				
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	110/220VAC	—	—	TO□-F3■P1C
				TO□-F3■P2C
				TO□-F3■P4C
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	110/220VAC	—	—	TO□-P3■K1C
				TO□-P3■K2C
				TO□-P3■K3C
				TO□-P3■K4C
				TO□-P3■K6C
				TO□-P3■K8C
				TO□-P3■KCC
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	110/220VAC	—	—	TO□-P3■J1C
				TO□-P3■J2C
				TO□-P3■J3C
				TO□-P3■J4C
■: Type R: Relay (250VAC 3A) S: SSR drive (12VDC) [ON/OFF]	110/220VAC	—	—	TO□-P3■P1C
				TO□-P3■P2C
				TO□-P3■P4C

Temperature Controllers

Series	Display Method	Control Method	Input Type	Sampling Period
Thumwheel Switch Setting Type Temperature Controller T3S Series (8-pin plug type)  W48×H48×L77.8mm	3-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA)
				Thermocouple: J(IC)
				RTD: DPt100Ω
※Sold separately: 8-pin socket (PG-8, PS-8(N))				
Thumwheel Switch Setting Type Temperature Controller T4M Series  W72×H72×L75mm	4-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA)
				Thermocouple: J(IC)
				Thermocouple: R(PR)
RTD: DPt100Ω				
Thumwheel Switch Setting Type Temperature Controller T4MA Series  W72×H72×L75mm	4-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA)
				Thermocouple: J(IC)
				Thermocouple: R(PR)
RTD: DPt100Ω				
Thumwheel Switch Setting Type Temperature Controller T3H Series  W48×H96×L70mm	3-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA)
				Thermocouple: J(IC)
				RTD: DPt100Ω
Thumwheel Switch Setting Type Temperature Controller T3HA Series  W48×H96×L70mm	3-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA)
				Thermocouple: J(IC)
				RTD: DPt100Ω

※1. Please contact us for temperature unit °F model.

Setting Range*1	Control Output	Alarm/Sub/Dual Output	Power Supply	Protection Structure	Approval	Model
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	—	100-240VAC	—	—	T3S-B4■K4C-N
0 to 800°C						T3S-B4■K8C-N
0 to 200°C						T3S-B4■J2C-N
0 to 400°C						T3S-B4■J4C-N
0 to 99.9°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	—	100-240VAC	—	—	T3S-B4■P1C-N
0 to 200°C						T3S-B4■P2C-N
0 to 400°C						T3S-B4■P4C-N
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	—	100-240VAC	—	—	T4M-B4■K4C-N
0 to 800°C						T4M-B4■K8C-N
0 to 1200°C						T4M-B4■KCC-N
0 to 400°C						T4M-B4■J4C-N
600 to 1600°C						T4M-B4■RFC-N
-99.9 to 199.9°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	—	100-240VAC	—	—	T4M-B4■P0C-N
0 to 400°C						T4M-B4■P4C-N
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Alarm output	100-240VAC	—	—	T4MA-B4■K4C-N
0 to 800°C						T4MA-B4■K8C-N
0 to 1200°C						T4MA-B4■KCC-N
0 to 400°C						T4MA-B4■J4C-N
600 to 1600°C						T4MA-B4■RFC-N
-99.9 to 199.9°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Alarm output	100-240VAC	—	—	T4MA-B4■P0C-N
0 to 400°C						T4MA-B4■P4C-N
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	—	100-240VAC	—	—	T3H-B4■K4C-N
0 to 800°C						T3H-B4■K8C-N
0 to 999°C						T3H-B4■KAC-N
0 to 400°C						T3H-B4■J4C-N
0 to 800°F						T3H-B4■J8F-N
-99 to 199°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	—	100-240VAC	—	—	T3H-B4■P0C-N
0 to 99.9°C						T3H-B4■P1C-N
0 to 400°C						T3H-B4■P4C-N
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Alarm output	100-240VAC	—	—	T3HA-B4■K4C-N
0 to 800°C						T3HA-B4■K8C-N
0 to 999°C						T3HA-B4■KAC-N
0 to 400°C						T3HA-B4■J4C-N
-99 to 199°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Alarm output	100-240VAC	—	—	T3HA-B4■P0C-N
0 to 400°C						T3HA-B4■P4C-N

Temperature Controllers

Series	Display Method	Control Method	Input Type	Sampling Period	
Thumwheel Switch Setting Type Temperature Controller T3HS Series  W48×H96×L70mm	3-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA)	
				100ms	
				Thermocouple: J(IC)	
				RTD: DPt100Ω	
				100ms	
Thumwheel Switch Setting Type Temperature Controller T4L Series  W96×H96×L70mm	4-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA)	
				100ms	Thermocouple: J(IC)
					Thermocouple: R(PR)
				100ms	
Thumwheel Switch Setting Type Temperature Controller T4LA Series  W96×H96×L70mm	4-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA)	
				100ms	Thermocouple: J(IC)
					Thermocouple: R(PR)
				100ms	
Thumwheel Switch Setting Type Temperature Controller T4LP Series  W96×H96×L70mm	4-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA)	
				100ms	Thermocouple: J(IC)
					Thermocouple: R(PR)
				100ms	

※1. Please contact us for temperature unit °F model.

Setting Range*1	Control Output	Alarm/Sub/Dual Output	Power Supply	Protection Structure	Approval	Model
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Sub output	100-240VAC	—	—	T3HS-B4■K4C-N
0 to 400°C						T3HS-B4■J4C-N
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Sub output	100-240VAC	—	—	T3HS-B4■P4C-N
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	—	100-240VAC	—	—	T4L-B4■K4C-N
0 to 800°C						T4L-B4■K8C-N
0 to 1200°C						T4L-B4■KCC-N
0 to 400°C						T4L-B4■J4C-N
600 to 1600°C						T4L-B4■RFC-N
-99.9 to 199.9°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	—	100-240VAC	—	—	T4L-B4■P0C-N
0 to 400°C						T4L-B4■P4C-N
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Alarm output	100-240VAC	—	—	T4LA-B4■K4C-N
0 to 800°C						T4LA-B4■K8C-N
0 to 1200°C						T4LA-B4■KCC-N
0 to 400°C						T4LA-B4■J4C-N
600 to 1600°C						T4LA-B4■RFC-N
-99.9 to 199.9°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Alarm output	100-240VAC	—	—	T4LA-B4■P0C-N
0 to 400°C						T4LA-B4■P4C-N
0 to 400°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Dual output	100-240VAC	—	—	T4LP-B4■K4C-N
0 to 800°C						T4LP-B4■K8C-N
0 to 1200°C						T4LP-B4■KCC-N
0 to 400°C						T4LP-B4■J4C-N
600 to 1600°C						T4LP-B4■RFC-N
0 to 200.0°C	■: Type R: Relay (250VAC 5A) S: SSR drive (12VDC) [ON/OFF] C: Current (DC4-20mA)	Dual output	100-240VAC	—	—	T4LP-B4■P2C-N
0 to 400°C						T4LP-B4■P4C-N


Temperature Controllers


Series	Display Method	Input Type	Sampling Period	Control Output
Temperature Indicator T3NI Series  W48×H24×L48mm	3-digit 7-segment LED	Thermocouple: K(CA)	100ms	Indicator
		Thermocouple: J(IC)		
		RTD: DPt100Ω	100ms	Indicator
Temperature Indicator T3SI Series (8-pin plug type)  W48×H48×L77.8mm	3-digit 7-segment LED	Thermocouple: K(CA)	100ms	Indicator
		Thermocouple: J(IC)		
		RTD: DPt100Ω	100ms	Indicator
※Sold separately: 8-pin socket (PG-8, PS-8(N))				
Temperature Indicator T4MI Series  W72×H72×L75mm	4-digit 7-segment LED	Thermocouple: K(CA)	100ms	Indicator
		Thermocouple: J(IC)		
		Thermocouple: R(PR)		
		RTD: DPt100Ω	100ms	Indicator
Temperature Indicator T4YI Series  W72×H36×L93mm	4-digit 7-segment LED	Thermocouple: K(CA)	100ms	Indicator
		Thermocouple: J(IC)		
		RTD: DPt100Ω	100ms	Indicator
Temperature Indicator T4WI Series  W96×H36×L100mm	4-digit 7-segment LED	Thermocouple: K(CA)	100ms	Indicator
		Thermocouple: J(IC)		
		RTD: DPt100Ω	100ms	Indicator

※1. Please contact us for temperature unit °F model.


Display Range ^{※1}	Power Supply	Protection Structure	Approval	Model
0 to 200°C	12-24VDC	—	—	T3NI-NXNK2C-N
0 to 400°C				T3NI-NXNK4C-N
0 to 800°C				T3NI-NXNK8C-N
0 to 999°C				T3NI-NXNKAC-N
0 to 200°C				T3NI-NXNJ2C-N
0 to 400°C				T3NI-NXNJ4C-N
0 to 500°C				T3NI-NXNJ5C-N
-99.9 to 99.9°C	12-24VDC	—	—	T3NI-NXNP0C-N
0 to 99.9°C				T3NI-NXNP1C-N
0 to 200°C				T3NI-NXNP2C-N
0 to 400°C				T3NI-NXNP4C-N
0 to 800°C	100-240VAC	—	—	T3SI-N4NK8C-N
0 to 400°C				T3SI-N4NJ4C-N
0 to 99.9°C	100-240VAC	—	—	T3SI-N4NP1C-N
0 to 400°C				T3SI-N4NP4C-N
0 to 800°C	100-240VAC	—	—	T4MI-N4NK8C-N
0 to 1200°C				T4MI-N4NKCC-N
0 to 400°C				T4MI-N4NJ4C-N
600 to 1600°C				T4MI-N4NRFC-N
-99.9 to 199.9°C	100-240VAC	—	—	T4MI-N4NP0C-N
0 to 400°C				T4MI-N4NP4C-N
0 to 1200°C	100-240VAC	—	—	T4YI-N4NKCC-N
0 to 500°C				T4YI-N4NJ5C-N
-99.9 to 199.9°C	100-240VAC	—	—	T4YI-N4NP0C-N
0 to 400°C				T4YI-N4NP4C-N
0 to 1200°C	100-240VAC	—	—	T4WI-N4NKCC-N
0 to 500°C				T4WI-N4NJ5C-N
-99.9 to 199.9°C	100-240VAC	—	—	T4WI-N4NP0C-N
0 to 400°C				T4WI-N4NP4C-N


Temperature Controllers

Series	Display Method	Input Type	Sampling Period	Control Output
Temperature Indicator T3HI Series  W48×H96×L70mm	3-digit 7-segment LED	Thermocouple: K(CA)	100ms	Indicator
		Thermocouple: J(IC)		
		RTD: DPt100Ω	100ms	Indicator

Temperature Indicator T4LI Series  W96×H96×L70mm	4-digit 7-segment LED	Thermocouple: K(CA)	100ms	Indicator
		Thermocouple: J(IC)		
		Thermocouple: R(PR)		
		RTD: DPt100Ω	100ms	Indicator


※1. Please contact us for temperature unit °F model.

Series	Display Method	Input CH	Input Type	Control Output
5-CH Temperature Indicator T4WM Series  W96×H48×L100mm	4-digit 7-segment LED	5-CH	Thermocouple: K(CA)	Indicator
			Thermocouple: J(IC)	
			RTD: DPt100Ω	Indicator

Series	Display Method	Control Method	Input Type	Sampling Period	Input Range	
Refrigeration Temperature Controller TC3YF Series  W72×H36×L77mm	3-digit 7-segment LED	Cooling	ON/OFF control	Thermistor(NTC) ^{※1} : 5kΩ	500ms	-40.0 to 99.9°C -40.0 to 212°F
			ON/OFF control	Thermistor(NTC) ^{※1} : 5kΩ	500ms	-40.0 to 99.9°C -40.0 to 212°F
		ON/OFF control	RTD ^{※2} : DPt100Ω	500ms	-99.9 to 99.9°C -148 to 212°F	
			RTD ^{※2} : DPt100Ω	500ms	-99.9 to 99.9°C -148 to 212°F	

※1. Accessory: Thermistor (NTC)

※2. Sold separately: RTD

Series	Display Method	Control Method	Input Type	Sampling Period	
Simple Operation Type Temperature Controller TC3YT Series  W72×H36×L77mm	3-digit 7-segment LED	Heating	ON/OFF control, P control	Thermocouple: K(CA), J(IC) RTD: DPt100Ω	500ms

Display Range ^{※1}	Power Supply	Protection Structure	Approval	Model
0 to 999°C	100-240VAC	—	—	T3HI-N4NKAC-N
0 to 400°C				T3HI-N4NJ4C-N
-99 to 199°C	100-240VAC	—	—	T3HI-N4NP0C-N
0 to 400°C				T3HI-N4NP4C-N
0 to 800°C	100-240VAC	—	—	T4LI-N4NK8C-N
0 to 1200°C				T4LI-N4NKCC-N
0 to 400°C				T4LI-N4NJ4C-N
600 to 1600°C				T4LI-N4NRFC-N
-99.9 to 199.9°C	100-240VAC	—	—	T4LI-N4NP0C-N
0 to 400°C				T4LI-N4NP4C-N

Display Range	Power Supply	Protection Structure	Approval	Model
0 to 1200°C	110/220VAC	—	—	T4WM-N3NKCC
0 to 500°C				T4WM-N3NJ5C
-99.9 to 199.9°C	110/220VAC	—	—	T4WM-N3NP0C
0 to 399°C				T4WM-N3NP4C

Control Output			Power Supply	Protection Structure	Approval	Model
Compressor	Defrost	Evaporator-fan				
Relay (250VAC 5A)	—	—	12-24VDC	IP65 (front panel)	—	TC3YF-11R
Relay (250VAC 5A)	Relay (250VAC 10A)	—				TC3YF-21R
Relay (250VAC 5A)	Relay (250VAC 10A)	Relay (250VAC 5A)				TC3YF-31R
Relay (250VAC 5A)	—	—	100-240VAC	IP65 (front panel)	cUL ^{us}	TC3YF-14R
Relay (250VAC 5A)	Relay (250VAC 10A)	—				TC3YF-24R
Relay (250VAC 5A)	Relay (250VAC 10A)	Relay (250VAC 5A)				TC3YF-34R
Relay (250VAC 5A)	—	—	12-24VDC	IP65 (front panel)	—	TC3YF-11R
Relay (250VAC 5A)	Relay (250VAC 10A)	—				TC3YF-21R
Relay (250VAC 5A)	Relay (250VAC 10A)	Relay (250VAC 5A)				TC3YF-31R
Relay (250VAC 5A)	—	—	100-240VAC	IP65 (front panel)	cUL ^{us}	TC3YF-14R
Relay (250VAC 5A)	Relay (250VAC 10A)	—				TC3YF-24R
Relay (250VAC 5A)	Relay (250VAC 10A)	Relay (250VAC 5A)				TC3YF-34R

Control Output			Power Supply	Protection Structure	Approval	Model
Relay (3A)			100-240VAC	IP65 (front panel)	cUL ^{us}	TC3YT-B4R3
Relay (16A)						TC3YT-B4R16

Temperature Controllers

Series	Display Method	Measured Range		Output	
		Temperature	Humidity	Temperature	Humidity
Room Type Temperature/Humidity Sensor THD-R Series  W60×H80×L30.5mm	Non-display	-19.9 to 60.0°C	—	DPT100Ω resistance value	—
	Non-display	-19.9 to 60.0°C	0.0 to 99.9%RH (recommended : 0.0 to 90.0%)	DPT100Ω resistance value	Current (DC4-20mA)
				Current (DC4-20mA)	Current (DC4-20mA)
				Voltage (1-5VDC)	Voltage (1-5VDC)
RS485 comm.	RS485 comm.				
Wall Mount Type Temperature/Humidity Sensor THD-W Series  W72×H85×L34.5mm (except sensor pole)	Non-display	-19.9 to 60.0°C	0.0 to 99.9%RH	Current (DC4-20mA)	Current (DC4-20mA)
				Voltage (1-5VDC)	Voltage (1-5VDC)
				RS485 comm.	RS485 comm.
	3-digit 7-segment LED	-19.9 to 60.0°C	0.0 to 99.9%RH	Current (DC4-20mA)	Current (DC4-20mA)
				Voltage (1-5VDC)	Voltage (1-5VDC)
				RS485 comm.	RS485 comm.
Duct Mount Type Temperature/Humidity Sensor THD-D Series  W72×H85×L34.5mm (except sensor pole)	Non-display	-19.9 to 60.0°C	0.0 to 99.9%RH	Current (DC4-20mA)	Current (DC4-20mA)
				Voltage (1-5VDC)	Voltage (1-5VDC)
				RS485 comm.	RS485 comm.
	3-digit 7-segment LED	-19.9 to 60.0°C	0.0 to 99.9%RH	Current (DC4-20mA)	Current (DC4-20mA)
				Voltage (1-5VDC)	Voltage (1-5VDC)
				RS485 comm.	RS485 comm.

Sampling Period	Sensor Pole Length	Power Supply	Protection Structure	Approval	Model
—	—	—	IP10	CE	THD-R-PT
500ms	—	24VDC	IP10	CE	THD-R-PT/C
				CE	THD-R-C
				CE	THD-R-V
				CE	THD-R-T
500ms	100m	24VDC	IP65 (except sensor part)	CE	THD-W1-C
	200m				THD-W2-C
	100m			CE	THD-W1-V
	200m				THD-W2-V
	100m			CE	THD-W1-T
	200m				THD-W2-T
500ms	100m	24VDC	IP65 (except sensor part)	CE	THD-WD1-C
	200m				THD-WD2-C
	100m			CE	THD-WD1-V
	200m				THD-WD2-V
	100m			CE	THD-WD1-T
	200m				THD-WD2-T
500ms	100m	24VDC	IP65 (except sensor part)	CE	THD-D1-C
	200m				THD-D2-C
	100m			CE	THD-D1-V
	200m				THD-D2-V
	100m			CE	THD-D1-T
	200m				THD-D2-T
500ms	100m	24VDC	IP65 (except sensor part)	CE	THD-DD1-C
	200m				THD-DD2-C
	100m			CE	THD-DD1-V
	200m				THD-DD2-V
	100m			CE	THD-DD1-T
	200m				THD-DD2-T

SSRs / Power Controllers

Single-Phase, Detachable Heatsink · Slim, Detachable Heatsink · Heatsink Integrated Type SSR /



Series	Control Phase	Heatsink	Mounting	Input Voltage	Load Voltage	Dielectric Strength
Single-Phase, Detachable Heatsink Type SSR SR1 Series  W44xH58xL28.3mm	1-phase	—	Panel	4-30VDC	24-240VAC	4,000VAC
					48-480VAC	4,000VAC
				90-240VAC	24-240VAC	4,000VAC
					48-480VAC	4,000VAC
Single-Phase, Slim, Detachable Heatsink Type SSR SRC1 Series  W22.5xH98xL33.5mm	1-phase	—	Panel	4-30VDC	24-240VAC	4,000VAC
					48-480VAC	4,000VAC
				90-240VAC	48-480VAC	4,000VAC
					24-240VAC	4,000VAC
Single-Phase, Heatsink Integrated Type SSR SRH1 Series <Rated load current: 15A/20A>  W22.5xH100xL100mm <Rated load current: 30A/40A>  W45xH100xL100mm <Rated load current: 60A>  W110xH100xL100mm	1-phase	●	Panel, DIN rail	4-30VDC	24-240VAC	4,000VAC
					48-480VAC	4,000VAC
					48-480VAC	4,000VAC
				24VAC	24-240VAC	4,000VAC
					48-480VAC	4,000VAC
				90-240VAC	24-240VAC	4,000VAC

※1. Rated load current capacity is varied by ambient temperature. Refer to "SSR Derating Curve" of Autonics' total catalogue.

Rated Load Current (□: type)								Function		Ambient Temperature*1	Approval	Model
15: 15A, 20: 20A, 25: 25A, 30: 30A, 75: 75A								Zero Cross Turn-On	Random Turn-On			
15A	20A	25A	30A	40A	50A	60A	75A					
●	—	●	—	●	●	—	●	●	—	-30 to 80°C	CE C RU US	SR1-12□
●	—	●	—	●	●	—	●	●	—	-30 to 80°C	CE C RU US	SR1-14□
●	—	●	—	●	●	—	●	—	●			SR1-14□R
●	—	●	—	●	●	—	●	●	—	-30 to 80°C	CE C RU US	SR1-42□
●	—	●	—	●	●	—	●	●	—	-30 to 80°C	CE C RU US	SR1-44□
●	●	—	●	—	—	—	—	●	—	-30 to 80°C	CE C RU US	SRC1-12□
—	●	—	—	—	—	—	—	●	—	-30 to 80°C	CE C RU US	SRC1-1420
—	●	—	—	—	—	—	—	—	●	-30 to 80°C	CE C RU US	SRC1-1420R
●	●	—	●	—	—	—	—	●	—	-30 to 80°C	CE C RU US	SRC1-42□
—	●	—	—	—	—	—	—	●	—	-30 to 80°C	CE C RU US	SRC1-4420
●	●	—	●	●	—	●	—	●	—	-30 to 80°C	CE C RU US	SRH1-12□
—	●	—	●	—	—	●	—	●	—	-30 to 80°C	CE C RU US	SRH1-14□
—	●	—	●	—	—	●	—	—	●	-30 to 80°C	CE C RU US	SRH1-14□R
●	●	—	●	●	—	●	—	●	—	-30 to 80°C	CE C RU US	SRH1-22□
—	●	—	●	—	—	●	—	●	—	-30 to 80°C	CE C RU US	SRH1-24□
●	●	—	●	●	—	●	—	●	—	-30 to 80°C	CE C RU US	SRH1-42□




SSRs / Power Controllers

Single-Phase, Detachable Heatsink · Slim, Detachable Heatsink · Heatsink Integrated Type SSR /

Series	Control Phase	Heatsink	Mounting	Input Current	Load Voltage	Dielectric Strength
Single-Phase, Analog Input Type SSR SRPH1 Series <Rated load current: 20A/30A>  W45xH100xL100mm	1-phase	●	Panel, DIN rail	Analog input 4-20mA	100-240VAC	4,000VAC
					100-240VAC	4,000VAC
					100-240VAC	4,000VAC
					200-480VAC	4,000VAC
					200-480VAC	4,000VAC
					200-480VAC	4,000VAC
<Rated load current: 60A>  W110xH100xL100mm						

※1. Operation mode is selectable by jumper pin of the unit and factory default is phase control (power equality division method).

※2. Rated load current capacity is varied by ambient temperature. Refer to "SSR Derating Curve" of Autronics' total catalogue.

Series	Control Phase	Socket	Input Voltage	Load Voltage	Dielectric Strength
Single-Phase, Socket Type SSR SRS1-A Series <Rated load current: 1A/2A/3A>  W13xH29xL28mm <Rated load current: 5A>  W13xH29xL38mm	1-phase	Autronics Socket SK-G05	4-24VDC	24-240VAC	2,500VAC
				5-100VDC	2,500VAC
				5-200VDC	2,500VAC
				5-240VAC/5-200VDC	2,500VAC
Single-Phase, Socket Type SSR SRS1-B Series  W21xH27xL34.5mm	1-phase	General LY2 socket	4-30VDC	90-240VAC	2,500VAC
				90-240VAC	2,500VAC


※1. Rated load current capacity is varied by ambient temperature. Refer to "SSR Derating Curve" of Autronics' total catalogue.

Rated Load Current			Operation Mode ^{*1}	Ambient Temperature ^{*2}	Approval	Model
20A	30A	60A				
●	—	—	Cycle control (variable cycle/fix cycle) Phase control (phase equality division method/power equality division method)	-20 to 70°C	CE C RU US	SRPH1-A220
—	●	—	Cycle control (variable cycle/fix cycle) Phase control (phase equality division method/power equality division method)	-20 to 70°C	CE C RU US	SRPH1-A230
—	—	●	Cycle control (variable cycle/fix cycle) Phase control (phase equality division method/power equality division method)	-20 to 70°C	CE C RU US	SRPH1-A260
●	—	—	Cycle control (variable cycle/fix cycle) Phase control (phase equality division method/power equality division method)	-20 to 70°C	CE C RU US	SRPH1-A420
—	●	—	Cycle control (variable cycle/fix cycle) Phase control (phase equality division method/power equality division method)	-20 to 70°C	CE C RU US	SRPH1-A430
—	—	●	Cycle control (variable cycle/fix cycle) Phase control (phase equality division method/power equality division method)	-20 to 70°C	CE C RU US	SRPH1-A460

Rated Load Current (□: type)				Function		Number Of Output Circuits	Ambient Temperature ^{*1}	Approval	Model
01: 1A, 02: 2A, 03: 3A, 05: 5A				Zero Cross Turn-On	Random Turn-On				
1A	2A	3A	5A						
—	●	●	●	●	—	1	-20 to 70°C	CE C RU US	SRS1-A12□
—	●	●	●	—	●	1	-20 to 70°C	CE C RU US	SRS1-A12□R
●	●	—	—	—	—	1	-20 to 70°C	CE C RU US	SRS1-A1D1□
●	—	—	—	—	—	1	-20 to 70°C	CE C RU US	SRS1-A1D201
●	—	—	—	—	—	1	-20 to 70°C	CE C RU US	SRS1-A1X201
—	●	—	—	●	—	2	-20 to 80°C	CE C RU US	SRS1-B1202-2
—	●	—	—	—	●				SRS1-B1202R-2
—	—	●	●	●	—	1	-20 to 80°C	CE C RU US	SRS1-B12□-1
—	—	●	●	—	●				SRS1-B12□R-1

SSRs / Power Controllers


Single-Phase, Detachable Heatsink · Slim, Detachable Heatsink · Heatsink Integrated Type SSR /


Series	Control Phase	Control Method	Power Supply	Applied Load
<p>Single-Phase, Power Controller SPC1 Series</p>  <p>W94.6xH124.8xL92mm</p>	<p>1-phase</p>	<p>Phase control Cycle control (zero cross turn-on) - Control period: 0.5 sec, 2 sec, 10 sec ON/OFF control (zero cross turn-on)</p>	<p>220VAC</p>	<p>Resistance load (min. load: over 5% of rated current)</p>


Load Voltage	Rated Load Current	Control Input	Function	Ambient Temperature	Approval	Model
220VAC	35A	DC4-20mA, 1-5VDC, External 24VDC, External VR (1k Ω), External contact (ON/OFF)	Output limit (0 to 100%), Soft Start (0 to 50 sec), Output display, 50/60Hz automatic recognition	0 to 50°C	—	SPC1-35
	50A	DC4-20mA, 1-5VDC, External 24VDC, External VR (1k Ω), External contact (ON/OFF)	Output limit (0 to 100%), Soft Start (0 to 50 sec), Output display, 50/60Hz automatic recognition	0 to 50°C	—	SPC1-50


Counters


Compact, LCD Display Counter (Indicator Only) / Programmable Counter / Up · Down Counter (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Counter / Thumbwheel Switch Setting Type Up · Down Measure Counter




Series	Display Method	Operation Method	Terminal	Power Supply	External Power Supply	Input Method	
						Signal	Reset
Compact, LCD Display Counter (Indicator Only) LA8N Series  W48xH24xL54mm	8-digit 7-segment LCD	Count up	Terminal block	Built-in battery (over 7 years)	—	No-voltage input (NPN)	No-voltage input (NPN)
		Count up, Count down, Count up/down					
		Count up	Terminal block	Built-in battery (over 7 years)	—	Voltage input (PNP)	Voltage input (PNP)
		Count up, Count down, Count up/down					
Count up	Terminal block	Built-in battery (over 7 years)	—	Free voltage input	No-voltage input (NPN)		























Series	Display Method	Operation Method	Terminal	Power Supply	External Power Supply	Signal Input Method	Max. Counting Speed [cps]
Programmable Counter (Timer) CT4S Series  W48xH48xL90mm	4-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	24VAC, 24-48VDC	12VDC Max. 100mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 1k, 5k, 10k
				100-240VAC	12VDC Max. 100mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 1k, 5k, 10k

Programmable Counter (Timer) CT6S Series  W48xH48xL90mm	6-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	24VAC, 24-48VDC	12VDC Max. 100mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 1k, 5k, 10k
				100-240VAC	12VDC Max. 100mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 1k, 5k, 10k

Programmable Counter (Timer) CT6Y Series  W72xH36xL77mm	6-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	24VAC, 24-48VDC	12VDC Max. 100mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 1k, 5k, 10k
				100-240VAC	12VDC Max. 100mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 1k, 5k, 10k

Programmable Counter (Timer) CT6M Series  W72xH72xL85mm	6-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	24VAC, 24-48VDC	12VDC Max. 100mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 1k, 5k, 10k
				100-240VAC	12VDC Max. 100mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 1k, 5k, 10k



















Max. Counting Speed [cps]	Min. Signal Width	Control Output	Backlight	Protection Structure	Approval	Model
1, 30, 1k	20ms	Indicator	●	IP66 (front panel)	CE  us	LA8N-BN-L
			—			LA8N-BN
1, 30, 1k	20ms	Indicator	●	IP66 (front panel)	CE  us	LA8N-BV-L
			—			LA8N-BV
20	20ms	Indicator	—	IP66 (front panel)	CE  us	LA8N-BF

Min. Signal Width	Control Output			Communication Output	Protection Structure	Approval	Model			
	Type	Relay	NPN Open Collector							
1ms/20ms	2-stage preset	SPST (1a): 2	1	—	IP65 (front panel)	CE  us	CT4S-2P2			
			—	RS485			CT4S-2P2T			
	1-stage preset	SPDT (1c): 1	1	—	IP65 (front panel)	CE  us	CT4S-1P2			
			—	RS485			CT4S-1P2T			
1ms/20ms	2-stage preset	SPST (1a): 2	1	—	IP65 (front panel)	CE  us	CT4S-2P4			
			—	RS485			CT4S-2P4T			
	1-stage preset	SPDT (1c): 1	1	—	IP65 (front panel)	CE  us	CT4S-1P4			
			—	RS485			CT4S-1P4T			
1ms/20ms	2-stage preset	SPST (1a): 2	1	—	IP65 (front panel)	CE  us	CT6S-2P2			
			—	RS485			CT6S-2P2T			
		1-stage preset	SPDT (1c): 1	1	—	IP65 (front panel)	CE  us	CT6S-1P2		
				—	RS485			CT6S-1P2T		
	Indicator	—	—	—	—	IP65 (front panel)	CE  us	CT6S-I2		
				—	RS485			CT6S-I2T		
				2-stage preset	SPST (1a): 2	1	—	IP65 (front panel)	CE  us	CT6S-2P4
						—	RS485			CT6S-2P4T
1-stage preset	SPDT (1c): 1	1	—		IP65 (front panel)	CE  us	CT6S-1P4			
		—	RS485				CT6S-1P4T			
Indicator	—	—	—	—	IP65 (front panel)	CE  us	CT6S-I4			
			—	RS485			CT6S-I4T			
			1ms/20ms	2-stage preset	SPST (1a): 1, SPDT (1c): 1	1	—	IP65 (front panel)	CE  us	CT6Y-2P2
						—	RS485			CT6Y-2P2T
1-stage preset	SPDT (1c): 1	1			—	IP65 (front panel)	CE  us	CT6Y-1P2		
—	RS485	CT6Y-1P2T								
Indicator	—	—		—	—	IP65 (front panel)	CE  us	CT6Y-I2		
				—	RS485			CT6Y-I2T		
			1ms/20ms	2-stage preset	SPST (1a): 1, SPDT (1c): 1	1	—	IP65 (front panel)	CE  us	CT6Y-2P4
—	RS485	CT6Y-2P4T								
1-stage preset	SPDT (1c): 1	1			—	IP65 (front panel)	CE  us	CT6Y-1P4		
—	RS485	CT6Y-1P4T								
Indicator	—	—		—	—	IP65 (front panel)	CE  us	CT6Y-I4		
				—	RS485			CT6Y-I4T		
			1ms/20ms	2-stage preset	SPST (1a): 1, SPDT (1c): 1	3	—	IP65 (front panel)	CE  us	CT6M-2P2
2	RS485	CT6M-2P2T								
1-stage preset	SPDT (1c): 1	2			—	IP65 (front panel)	CE  us	CT6M-1P2		
—	RS485	CT6M-1P2T								
Indicator	—	—		—	—	IP65 (front panel)	CE  us	CT6M-I2		
				—	RS485			CT6M-I2T		
			1ms/20ms	2-stage preset	SPST (1a): 1, SPDT (1c): 1	3	—	IP65 (front panel)	CE  us	CT6M-2P4
2	RS485	CT6M-2P4T								
1-stage preset	SPDT (1c): 1	2			—	IP65 (front panel)	CE  us	CT6M-1P4		
—	RS485	CT6M-1P4T								
Indicator	—	—		—	—	IP65 (front panel)	CE  us	CT6M-I4		
				—	RS485			CT6M-I4T		

Counters

Compact, LCD Display Counter (Indicator Only) / Programmable Counter / Up · Down Counter (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Counter / Thumbwheel Switch Setting Type Up · Down Measure Counter

Series	Display Method	Operation Method	Terminal	Power Supply	External Power Supply	Signal Input Method	Max. Counting Speed [cps]				
Up-Down Counter (Indicator Only) (Timer) FXY Series  W72xH36xL93mm	4-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	No-voltage input (NPN)	1, 30, 2k, 5k				
				12-24VAC, 12-24VDC	12VDC Max. 50mA	No-voltage input (NPN)	1, 30, 2k, 5k				
	6-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	No-voltage input (NPN)	1, 30, 2k, 5k				
				12-24VAC, 12-24VDC	12VDC Max. 50mA	No-voltage input (NPN)	1, 30, 2k, 5k				
Compact, Thumbwheel Switch Setting Type Up-Down Counter (Timer) FXS Series  W48xH48xL91mm	4-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
				12-24VAC, 12-24VDC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
	5digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
				12-24VAC, 12-24VDC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
Thumbwheel Switch Setting Type Up-Down Counter (Timer) FX Series  W72xH72xL112.3mm	4-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
				12-24VAC, 12-24VDC			1, 30, 2k, 5k				
				100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
				12-24VAC, 12-24VDC			1, 30, 2k, 5k				
	6-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
				100-240VAC			12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k		
				12-24VAC, 12-24VDC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
				100-240VAC			12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k		
Thumbwheel Switch Setting Type Up-Down Counter (Timer) FXH Series  W48xH96xL100mm	4-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
				100-240VAC			12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k		
				100-240VAC					12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k
				100-240VAC							12VDC Max. 50mA
Thumbwheel Switch Setting Type Up-Down Counter (Timer) FXL Series  W144xH72xL112mm	4-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)					
				100-240VAC			12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)			
	6-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k				
				100-240VAC			12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k		

Min. Signal Width	Control Output			Protection Structure	Approval	Model
	Type	Relay	NPN Open Collector			
20ms	Indicator	—	—	—		FX4Y-I
20ms	Indicator	—	—	—		FX4Y-I
20ms	Indicator	—	—	—		FX6Y-I
20ms	Indicator	—	—	—		FX6Y-I
20ms	1-stage preset	SPDT (1c): 1	1	—		FX4S
20ms	1-stage preset	SPDT (1c): 1	1	—		FX4S
20ms	Indicator	—	—	—		FX5S-I
20ms	Indicator	—	—	—		FX5S-I
20ms	2-stage preset	SPDT (1c): 2	2	—		FX4-2P
20ms	2-stage preset	SPDT (1c): 2	2	—	—	FX4-2P
20ms	1-stage preset	SPDT (1c): 1	1	—		FX4
20ms	1-stage preset	SPDT (1c): 1	1	—	—	FX4
20ms	Indicator	—	—	—		FX4-I
20ms	2-stage preset	SPDT (1c): 2	2	—		FX6-2P
20ms	1-stage preset	SPDT (1c): 1	1	—		FX6
20ms	1-stage preset	SPDT (1c): 1	1	—	—	FX6
20ms	Indicator	—	—	—		FX6-I
20ms	Indicator	—	—	—	—	FX6-I
20ms	2-stage preset	SPDT (1c): 2	2	—		FX4H-2P
	1-stage preset	SPDT (1c): 1	1	—		FX4H
	Indicator	—	—	—		FX4H-I
20ms	2-stage preset	SPDT (1c): 2	2	—		FX4L-2P
20ms	2-stage preset	SPDT (1c): 2	2	—		FX6L-2P
	Indicator	—	—	—		FX6L-I

Counters


Compact, LCD Display Counter (Indicator Only) / Programmable Counter / Up · Down Counter (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Counter / Thumbwheel Switch Setting Type Up · Down Measure Counter


Series	Display Method	Operation Method	Terminal	Power Supply	External Power Supply	Signal Input Method	Max. Counting Speed [cps]
Thumbwheel Switch Setting Type 8-Pin Plug Counter FS Series  W48xH48xL85mm	4-digit 7-segment LED	Count up, Count down	8-pin plug	100-240VAC	12VDC Max. 50mA	No-voltage input (NPN)	1, 30, 2k, 5k
				12-24VAC, 12-24VDC	12VDC Max. 50mA	No-voltage input (NPN)	1, 30, 2k, 5k
	5digit 7-segment LED	Count up, Count down	8-pin plug	100-240VAC	12VDC Max. 50mA	No-voltage input (NPN)	1, 30, 2k, 5k
※Sold separately: 8-pin socket (PG-08, PS-08(N))							
Thumbwheel Switch Setting Type Up-Down Counter F Series  W72xH72xL112mm	8-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k
Thumbwheel Switch Setting Type Up-Down Counter L Series  W144xH72xL112mm	8-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k
				12-24VAC, 12-24VDC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k
				100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k
Thumbwheel Switch Setting Type Up-Down Measure Counter FM Series  W72xH72xL112mm	4-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k
				12-24VAC, 12-24VDC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k
	6-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k
Thumbwheel Switch Setting Type Up-Down Measure Counter LM Series  W144xH72xL112mm	4-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k
	6-digit 7-segment LED	Count up, Count down, Count up/down	Terminal block	100-240VAC	12VDC Max. 50mA	Voltage input (PNP), No-voltage input (NPN)	1, 30, 2k, 5k


Min. Signal Width	Control Output			Protection Structure	Approval	Model
	Type	Relay	NPN Open Collector			
20ms	1-stage preset	SPST (1a): 1	—	—	—	FS4A
20ms	1-stage preset	SPST (1a): 1	—	—	—	FS4A
20ms	Indicator	—	—	—	—	FS5B
20ms	1-stage preset	SPDT (1c): 1	1	—	—	F8A
	Indicator	—	—	—	—	F8B
20ms	1-stage preset	SPDT (1c): 1	1	—	—	L8A
20ms	1-stage preset	SPDT (1c): 1	1	—	—	L8A
20ms	Indicator	—	—	—	—	L8B
20ms	2-stage preset	SPST (1a): 2	2	—	—	F4AM-2P
20ms	1-stage preset	SPDT (1c): 1	1	—	—	F4AM
20ms	1-stage preset	SPDT (1c): 1	1	—	—	F4AM
20ms	Indicator	—	—	—	—	F4BM
20ms	2-stage preset	SPST (1a): 2	2	—	—	F6AM-2P
20ms	1-stage preset	SPDT (1c): 1	1	—	—	F6AM
	Indicator	—	—	—	—	F6BM
20ms	2-stage preset	SPDT (1c): 2	2	—	—	L4AM-2P
	Indicator	—	—	—	—	L4BM
20ms	2-stage preset	SPDT (1c): 2	2	—	—	L6AM-2P
	Indicator	—	—	—	—	L6BM


Timers


Compact, LCD Display Timer (Indicator Only) / Programmable Timer / Timer (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Up · Down Timer / Thumbwheel Switch Setting Type LCD Display Timer / LCD Display Timer / Multi Function · Δ · Power OFF Delay · General-Purpose Analog Timer

Series	Display Method	Operation Method	Output Operation	Time Operation	Terminal	Power Supply	External Power Supply	Memory Protection
Compact LCD Display Timer (Indicator Only) LE8N Series  W48xH24xL54mm	8-digit 7-segment LCD	Count up	—	POWER ON START	Terminal block	Built-in battery (over 10 years)	—	—

Series	Display Method	Operation Method	Output Operation	Time Operation	Terminal	Power Supply	External Power Supply	Memory Protection
Programmable Timer (Counter) CT4S Series  W48xH48xL90mm	4-digit 7-segment LED	Count up, Count down	SIGNAL ON DELAY, POWER ON DELAY, FLICKER, INTERVAL, SIGNAL OFF DELAY, ON-OFF DELAY, INTEGRATION TIME	POWER ON START, SIGNAL ON START	Terminal block	24VAC, 24-48VDC	Max. 12VDC 100mA	Approx. 10 years
						100-240VAC	Max. 12VDC 100mA	Approx. 10 years

Programmable Timer (Counter) CT6S Series  W48xH48xL90mm	6-digit 7-segment LED	Count up, Count down	SIGNAL ON DELAY, POWER ON DELAY, FLICKER, INTERVAL, SIGNAL OFF DELAY, ON-OFF DELAY, INTEGRATION TIME	POWER ON START, SIGNAL ON START	Terminal block	24VAC, 24-48VDC	Max. 12VDC 100mA	Approx. 10 years
						100-240VAC	Max. 12VDC 100mA	Approx. 10 years

Programmable Timer (Counter) CT6Y Series  W72xH36xL77mm	6-digit 7-segment LED	Count up, Count down	SIGNAL ON DELAY, POWER ON DELAY, FLICKER, INTERVAL, SIGNAL OFF DELAY, ON-OFF DELAY, INTEGRATION TIME	POWER ON START, SIGNAL ON START	Terminal block	24VAC, 24-48VDC	Max. 12VDC 100mA	Approx. 10 years
						100-240VAC	Max. 12VDC 100mA	Approx. 10 years

Programmable Timer (Counter) CT6M Series  W72xH72xL85mm	6-digit 7-segment LED	Count up, Count down	SIGNAL ON DELAY, POWER ON DELAY, FLICKER, INTERVAL, SIGNAL OFF DELAY, ON-OFF DELAY, INTEGRATION TIME	POWER ON START, SIGNAL ON START	Terminal block	24VAC, 24-48VDC	Max. 12VDC 100mA	Approx. 10 years
						100-240VAC	Max. 12VDC 100mA	Approx. 10 years

Setting Range	Input Method		Control Output	Backlight	Protection Structure	Approval	Model
	Signal	Reset					
0.01 sec to 9999 hour 59 min 59 sec, 0.1 min to 99999 hour 59.9 min, 1 min to 999999 hour 59 min, 1 min to 9999 day 23 hour 59 min, 0.1 hour to 9999 day 23.9 hour, 1 sec to 9999999 sec, 0.1 min to 9999 hour 59 min, 1 min to 99999 hour 59 min, 0.1 hour to 999999.9 hour	Free voltage input	No-voltage input (NPN)	Indicator	—	IP66 (front panel)	CE c RU us	LE8N-BF
	No-voltage input (NPN)	No-voltage input (NPN)	Indicator	● —	IP66 (front panel)		LE8N-BN-L LE8N-BN
	Voltage input (PNP)	Voltage input (PNP)	Indicator	● —	IP66 (front panel)		LE8N-BV-L LE8N-BV

Setting Range	Signal Input Method	Control Output			Comm. Output	Protection Structure	Approval	Model
		Type	Relay	NPN Open Collector				
0.001 sec to 9.999 sec, 0.01 sec to 99.99 sec, 0.1 sec to 999.9 sec, 1 sec to 9999 sec, 1 sec to 99 min 59 sec, 0.1 min to 999.9 min, 1 min to 9999 min, 1 min to 99 hour 59 min, 1 hour to 9999 hour	Voltage input (PNP), No-voltage input (NPN)	2-stage preset	SPST (1a): 2	1 —	— RS485	IP65 (front panel)	CE c RU us	CT4S-2P2 CT4S-2P2T
		1-stage preset	SPDT (1c): 1	1 —	— RS485			CT4S-1P2 CT4S-1P2T
	Voltage input (PNP), No-voltage input (NPN)	2-stage preset	SPST (1a): 2	1 —	— RS485	IP65 (front panel)	CE c RU us	CT4S-2P4 CT4S-2P4T
		1-stage preset	SPDT (1c): 1	1 —	— RS485			CT4S-1P4 CT4S-1P4T

0.001 sec to 999.999 sec, 0.01 sec to 9999.99 sec, 0.1 sec to 99999.9 sec, 1 sec to 999999 sec, 0.01 sec to 99 min 59.99 sec, 0.1 sec to 999 min 59.9 sec, 1 sec to 9999 min 59 sec, 0.1 min to 99999.9 min, 1 min to 999999 min, 1 min to 99 hour 59 min 59 sec, 1 min to 9999 hour 59 min, 0.1 hour to 99999.9 hour	Voltage input (PNP), No-voltage input (NPN)	2-stage preset	SPST (1a): 2	1 —	— RS485	IP65 (front panel)	CE c RU us	CT6S-2P2 CT6S-2P2T
		1-stage preset	SPDT (1c): 1	1 —	— RS485			CT6S-1P2 CT6S-1P2T
		Indicator	—	—	— RS485			CT6S-I2 CT6S-I2T
	Voltage input (PNP), No-voltage input (NPN)	2-stage preset	SPST (1a): 2	1 —	— RS485	IP65 (front panel)	CE c RU us	CT6S-2P4 CT6S-2P4T
		1-stage preset	SPDT (1c): 1	1 —	— RS485			CT6S-1P4 CT6S-1P4T
		Indicator	—	—	— RS485			CT6S-I4 CT6S-I4T















0.001 sec to 999.999 sec, 0.01 sec to 9999.99 sec, 0.1 sec to 99999.9 sec, 1 sec to 999999 sec, 0.01 sec to 99 min 59.99 sec, 0.1 sec to 999 min 59.9 sec, 1 sec to 9999 min 59 sec, 0.1 min to 99999.9 min, 1 min to 999999 min, 1 min to 99 hour 59 min 59 sec, 1 min to 9999 hour 59 min, 0.1 hour to 99999.9 hour	Voltage input (PNP), No-voltage input (NPN)	2-stage preset	SPST (1a): 1, SPDT (1c): 1	1 —	— RS485	IP65 (front panel)	CE c RU us	CT6Y-2P2 CT6Y-2P2T
		1-stage preset	SPDT (1c): 1	1	— RS485			CT6Y-1P2 CT6Y-1P2T
		Indicator	—	—	— RS485			CT6Y-I2 CT6Y-I2T
	Voltage input (PNP), No-voltage input (NPN)	2-stage preset	SPST (1a): 1, SPDT (1c): 1	1 —	— RS485	IP65 (front panel)	CE c RU us	CT6Y-2P4 CT6Y-2P4T
		1-stage preset	SPDT (1c): 1	1	— RS485			CT6Y-1P4 CT6Y-1P4T
		Indicator	—	—	— RS485			CT6Y-I4 CT6Y-I4T

0.001 sec to 999.999 sec, 0.01 sec to 9999.99 sec, 0.1 sec to 99999.9 sec, 1 sec to 999999 sec, 0.01 sec to 99 min 59.99 sec, 0.1 sec to 999 min 59.9 sec, 1 sec to 9999 min 59 sec, 0.1 min to 99999.9 min, 1 min to 999999 min, 1 min to 99 hour 59 min 59 sec, 1 min to 9999 hour 59 min, 0.1 hour to 99999.9 hour	Voltage input (PNP), No-voltage input (NPN)	2-stage preset	SPST (1a): 1, SPDT (1c): 1	3 2	— RS485	IP65 (front panel)	CE c RU us	CT6M-2P2 CT6M-2P2T
		1-stage preset	SPDT (1c): 1	2	— RS485			CT6M-1P2 CT6M-1P2T
		Indicator	—	—	— RS485			CT6M-I2 CT6M-I2T
	Voltage input (PNP), No-voltage input (NPN)	2-stage preset	SPST (1a): 1, SPDT (1c): 1	3 2	— RS485	IP65 (front panel)	CE c RU us	CT6M-2P4 CT6M-2P4T
		1-stage preset	SPDT (1c): 1	2	— RS485			CT6M-1P4 CT6M-1P4T
		Indicator	—	—	— RS485			CT6M-I4 CT6M-I4T

Timers




Compact, LCD Display Timer (Indicator Only) / Programmable Timer / Timer (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Up · Down Timer / Thumbwheel Switch Setting Type LCD Display Timer / LCD Display Timer / Multi Function · Δ · Power OFF Delay · General-Purpose Analog Timer

Series	Display Method	Operation Method	Output Operation	Time Operation	Terminal	Power Supply	External Power Supply	Memory Protection
Timer (Indicator Only) (Counter) FX Series  W72xH36xL93mm	4-digit 7-segment LED	Count up, Count down	—	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
						12-24VAC, 12-24VDC	12VDC Max. 50mA	Approx. 10 years
	6-digit 7-segment LED	Count up, Count down	—	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
						12-24VAC, 12-24VDC	12VDC Max. 50mA	Approx. 10 years
Compact, Thumbwheel Switch Setting Type Up-Down Timer (Counter) FXS Series  W48xH48xL91mm	4-digit 7-segment LED	Count up, Count down	POWER ON DELAY, FLICKER	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
						12-24VAC, 12-24VDC	12VDC Max. 50mA	Approx. 10 years
	5-digit 7-segment LED	Count up, Count down	—	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
						12-24VAC, 12-24VDC	12VDC Max. 50mA	Approx. 10 years
Thumbwheel Switch Setting Type Up-Down Timer (Counter) FX Series  W72xH72xL112.3mm	4-digit 7-segment LED	Count up, Count down	POWER ON DELAY, FLICKER	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
						12-24VAC, 12-24VDC	12VDC Max. 50mA	Approx. 10 years
			—	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
						12-24VAC, 12-24VDC	12VDC Max. 50mA	Approx. 10 years
	6-digit 7-segment LED	Count up, Count down	POWER ON DELAY, FLICKER	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
						100-240VAC	12VDC Max. 50mA	Approx. 10 years
			—	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
						12-24VAC, 12-24VDC	12VDC Max. 50mA	Approx. 10 years


Setting Range	Signal Input Method	Control Output			Protection Structure	Approval	Model
		Type	Relay	NPN Open Collector			
0.01 sec to 99.99 sec, 0.1 sec to 999.9 sec, 1 sec to 9999 sec, 1 sec to 99 min 59 sec, 0.1 min to 999.9 min, 1 min to 99 hour 59 min, 0.1 hour to 999.9 hour, 1 hour to 9999 hour	No-voltage input (NPN)	Indicator	—	—	—		FX4Y-I
	No-voltage input (NPN)	Indicator	—	—	—		FX4Y-I
0.1 sec to 99999.9 sec, 1 sec to 999999 sec, 0.01 sec to 99 min 59.99 sec, 0.1 sec to 999 min 59.9 sec, 0.1 sec to 99999.9 min, 1 sec to 99 hour 59 min 59 sec, 1 min to 9999 hour 59 min, 0.1 hour to 99999.9 hour	No-voltage input (NPN)	Indicator	—	—	—		FX6Y-I
	No-voltage input (NPN)	Indicator	—	—	—		FX6Y-I
0.01 sec to 99.99 sec, 0.1 sec to 999.9 sec, 1 sec to 9999 sec, 1 sec to 99 min 59 sec, 0.1 min to 999.9 min, 1 min to 99 hour 59 min, 0.1 hour to 999.9 hour, 1 hour to 9999 hour	Voltage input (PNP) No-voltage input (NPN)	1-stage preset	SPDT (1c): 1	1	—		FX4S
	Voltage input (PNP) No-voltage input (NPN)	1-stage preset	SPDT (1c): 1	1	—		FX4S
0.1 sec to 9999.9 sec, 1 sec to 99999 sec, 0.01 sec to 9 min 59.99 sec, 0.1 sec to 99 min 59.9 sec, 0.1 min to 9999.9 min, 1 sec to 9 hour 59 min 59 sec, 1 min 999 hour 59 min, 0.1 hour to 9999.9 hour	Voltage input (PNP) No-voltage input (NPN)	Indicator	—	—	—		FX5S-I
	Voltage input (PNP) No-voltage input (NPN)	Indicator	—	—	—		FX5S-I
0.01 sec to 99.99 sec, 0.1 sec to 999.9 sec, 1 sec to 9999 sec, 1 sec to 99 min 59 sec, 0.1 min to 999.9 min, 1 min to 99 hour 59 min, 0.1 hour to 999.9 hour, 1 hour to 9999 hour	Voltage input (PNP) No-voltage input (NPN)	2-stage preset	SPDT (1c): 2	2	—		FX4-2P
	Voltage input (PNP) No-voltage input (NPN)	2-stage preset	SPDT (1c): 2	2	—	—	FX4-2P
	Voltage input (PNP) No-voltage input (NPN)	1-stage preset	SPDT (1c): 1	1	—		FX4
	Voltage input (PNP) No-voltage input (NPN)	1-stage preset	SPDT (1c): 1	1	—	—	FX4
	Voltage input (PNP) No-voltage input (NPN)	Indicator	—	—	—		FX4-I
	Voltage input (PNP) No-voltage input (NPN)	Indicator	—	—	—	—	FX4-I
0.1 sec to 99999.9 sec, 1 sec to 999999 sec, 0.01 sec to 99 min 59.99 sec, 0.1 sec to 999 min 59.9 sec, 0.1 sec to 99999.9 min, 1 sec to 99 hour 59 min 59 sec, 1 min to 9999 hour 59 min, 0.1 hour to 99999.9 hour	Voltage input (PNP) No-voltage input (NPN)	2-stage preset	SPDT (1c): 2	2	—		FX6-2P
	Voltage input (PNP) No-voltage input (NPN)	1-stage preset	SPDT (1c): 1	1	—		FX6
	Voltage input (PNP) No-voltage input (NPN)	1-stage preset	SPDT (1c): 1	1	—	—	FX6
	Voltage input (PNP) No-voltage input (NPN)	Indicator	—	—	—		FX6-I
	Voltage input (PNP) No-voltage input (NPN)	Indicator	—	—	—	—	FX6-I
	Voltage input (PNP) No-voltage input (NPN)	Indicator	—	—	—	—	FX6-I

Timers




Compact, LCD Display Timer (Indicator Only) / Programmable Timer / Timer (Indicator Only) /
Thumbwheel Switch Setting Type 8-Pin Plug Up · Down Timer / Thumbwheel Switch Setting Type LCD Display Timer / LCD Display Timer /
Multi Function · λ - Δ · Power OFF Delay · General-Purpose Analog Timer



Series	Display Method	Operation Method	Output Operation	Time Operation	Terminal	Power Supply	External Power Supply	Memory Protection
Thumbwheel Switch Setting Type Up-Down Timer (Counter) FXH Series  W48xH96xL100mm	4-digit 7-segment LED	Count up, Count down	POWER ON DELAY, FLICKER	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
			—	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
Thumbwheel Switch Setting Type Up-Down Timer (Counter) FXL Series  W144xH72xL112mm	4-digit 7-segment LED	Count up, Count down	POWER ON DELAY, FLICKER	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
	6-digit 7-segment LED	Count up, Count down	POWER ON DELAY, FLICKER	POWER ON START	Terminal block	100-240VAC	12VDC Max. 50mA	Approx. 10 years
Thumbwheel Switch Setting Type 8-Pin Plug Timer FSE Series  W48xH48xL85mm	4-digit 7-segment LED	Count up, Count down	POWER ON DELAY, FLICKER	POWER ON START	8-pin plug	100-240VAC	—	Approx. 10 years
						12-24VAC, 12-24VDC	—	Approx. 10 years
	5-digit 7-segment LED	Count up, Count down	—	POWER ON START	8-pin plug	100-240VAC	—	Approx. 10 years
						12-24VAC, 12-24VDC	—	Approx. 10 years

※Sold separately: 8-pin socket (PG-08, PS-08(N))




Series	Display Method	Operation Method	Output Operation	Time Operation	Terminal	Power Supply	External Power Supply	Memory Protection
Thumbwheel Switch Setting Type LCD Display Timer LE3S Series  W48xH48xL67mm	3-digit 7-segment LCD	Count up, Count down	POWER ON DELAY	POWER ON START	8-pin plug	24-240VAC, 24-240VDC	—	—
			ON DELAY, INTERVAL DELAY, FLICKER, ONE-SHOT OUT FLICKER, ON-OFF DELAY, OFF DELAY, INTEGRATION TIME	SIGNAL ON START	8-pin plug	24-240VAC, 24-240VDC	—	—

※Sold separately: 8-pin socket (PG-08, PS-08(N))

Setting Range	Signal Input Method	Control Output			Protection Structure	Approval	Model
		Type	Relay	NPN Open Collector			
0.01 sec to 99.99 sec, 0.1 sec to 999.9 sec, 1 sec to 9999 sec, 1 sec to 99 min 59 sec, 0.1 min to 999.9 min, 1 min to 99 hour 59 min, 0.1 hour to 999.9 hour, 1 hour to 9999 hour	Voltage input (PNP) No-voltage input (NPN)	2-stage preset	SPDT (1c): 2	2	—		FX4H-2P
		1-stage preset	SPDT (1c): 1	1	—		FX4H
	Voltage input (PNP) No-voltage input (NPN)	Indicator	—	—	—		FX4H-I


0.01 sec to 99.99 sec, 0.1 sec to 999.9 sec, 1 sec to 9999 sec, 1 sec to 99 min 59 sec, 0.1 min to 999.9 min, 1 min to 99 hour 59 min, 0.1 hour to 999.9 hour, 1 hour to 9999 hour	Voltage input (PNP) No-voltage input (NPN)	2-stage preset	SPDT (1c): 2	2	—		FX4L-2P
0.1 sec to 99999.9 sec, 1 sec to 999999 sec, 0.01 sec to 99 min 59.99 sec, 0.1 sec to 999 min 59.9 sec, 0.1 sec to 99999.9 min, 1 sec to 99 hour 59 min 59 sec, 1 min to 9999 hour 59 min, 0.1 hour to 99999.9 hour	Voltage input (PNP) No-voltage input (NPN)	2-stage preset	SPDT (1c): 2	2	—	—	FX6L-2P
	Voltage input (PNP) No-voltage input (NPN)	Indicator	—	—	—		FX6L-I

0.01 sec to 99.99 sec, 0.1 sec to 999.9 sec, 1 sec to 9999 sec, 1 sec to 99 min 59 sec, 0.1 min to 999.9 min, 1 min to 99 hour 59 min, 0.1 hour to 999.9 hour, 1 hour to 9999 hour	No-voltage input (NPN)	1-stage preset	Time-limit SPDT (1c): 1	—	—	—	FS4E
	No-voltage input (NPN)	1-stage preset	Time-limit SPDT (1c): 1	—	—	—	FS4E
0.1 sec to 9999.9 sec, 1 sec to 99999 sec, 0.01 sec to 9 min 59.99 sec, 0.1 sec to 99 min 59.9 sec, 0.1 min to 9999.9 min, 1 sec to 9 hour 59 min 59 sec, 1 min to 999 hour 59 min, 0.1 hour to 9999.9 hour	No-voltage input (NPN)	Indicator	—	—	—	—	FS5EI
	No-voltage input (NPN)	Indicator	—	—	—	—	FS5EI


Setting Range	Signal Input Method	Control Output		Backlight	Protection Structure	Approval	Model
		Relay	NPN Open Collector				
0.01 sec to 9.99 sec, 0.1 sec to 99.9 sec, 1 sec to 999 sec, 0.1 min to 99.9 min, 1 min to 999 min, 0.1 hour to 99.9 hour, 1 hour to 999 hour, 10 hour to 9990 hour, 0 min 01 sec to 9 min 59 sec, 0 hour 01 min to 9 hour 59 min	—	Time-limit SPDT (1c): 2	—	—	—		LE3SA
		Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—		LE3SB
	No-voltage input (NPN)	Time-limit SPDT (1c): 1	—	—	—		LE3S


Timers


Compact, LCD Display Timer (Indicator Only) / Programmable Timer / Timer (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Up · Down Timer / Thumbwheel Switch Setting Type LCD Display Timer / LCD Display Timer / Multi Function · Δ · Power OFF Delay · General-Purpose Analog Timer

Series	Display Method	Operation Method	Output Operation	Time Operation	Terminal	Power Supply	External Power Supply	Memory Protection
LCD Display Timer LE4S Series  W48xH48xL70mm	4-digit 7-segment LCD	Count up, Count down	ON DELAY, INTERVAL, FLICKER, STAR-DELTA, TWIN	POWER ON START	8-pin plug	24-240VAC, 24-240VDC	—	—
			ON DELAY, INTERVAL, FLICKER, ON-OFF DELAY, OFF DELAY	SIGNAL ON START	8-pin plug	24-240VAC, 24-240VDC	—	—


※Sold separately: 8-pin socket (PG-08, PS-08(N))

Series	Number Of Setting Steps	Operation Method	Output Operation	Terminal	Power Supply	External Power Supply
Weekly/Yearly Timer LE7M-2  W72xH72xL60mm	Weekly 48 steps, Yearly 24 steps	Time setting	ON/OFF, CYCLE, PULSE	Terminal block	100-240VAC	—



Weekly/Yearly Timer LE365S-41  W48xH48xL60mm	Weekly 48 steps, Yearly 24 steps	Time setting	ON/OFF, CYCLE, PULSE	Terminal block	100-240VAC	—
--	-------------------------------------	--------------	----------------------------	----------------	------------	---

Series	Operation Method	Output Operation	Time Operation	Terminal	Power Supply
Miniature Analog Timer ATM Series  W21.5xH28xL59.3mm	Time setting	POWER ON DELAY	POWER ON START	14-pin plug	■: Type 2: 24VDC 5: 220VAC 6: 110VAC

※Sold separately: My socket

Compact Multi-Function Analog Timer ATS8 Series  W38xH42xL83.5mm	Time setting	POWER ON DELAY, FLICKER, INTERVAL	POWER ON START	8-pin plug	12VDC 24VAC, 24VDC 100-240VAC, 24-240VDC 12VDC 24VAC, 24VDC 100-240VAC, 24-240VDC
--	--------------	---	-------------------	------------	--



※Sold separately: 8-pin socket (PG-08, PS-08(N), MS-08)

Setting Range	Signal Input Method	Control Output		Backlight	Protection Structure	Approval	Model
		Relay	NPN Open Collector				
0.01 sec to 9.999 sec, 0.01 sec to 99.99 sec, 0.1 sec to 999.9 sec, 1 sec to 9999 sec, 0 min 1 sec to 99 min 59 sec, 0.1 min to 999.9 min, 1 min to 9999 min, 0 hour 1 min to 99 hour 59 min, 0.01 hour to 99.99 hour, 0.1 hour to 999.9 hour, 1 hour to 9999 hour	—	Time-limit SPDT (1c): 2 or Time-limit SPDT (1c): 1 + Instantaneous SPDT (1c): 1 depending on output operation mode		●	—	CE  us	LE4SA
	No-voltage input (NPN)	Time-limit SPDT (1c): 1		●	—	CE  us	LE4S

Memory Protection	Signal Input Method	Control Output		Time/Month Deviation	Protection Structure	Approval	Model
		Relay	NPN Open Collector				
Approx. 5 years	—	SPDT (1c): 2	—	±15 sec/month	—	—	LE7M-2

Approx. 5 years	—	SPST (1a): 1	—	±15 sec/month	—	—	LE365S-41
-----------------	---	--------------	---	---------------	---	---	-----------





Setting Range	Signal Input Method	Control Output		Protection Structure	Approval	Model
		Relay	NPN Open Collector			
0.1 to 1 sec	—	SPDT (1c): 4	—	—	CE	ATM4-■1S
0.5 to 5 sec	—	SPDT (1c): 4	—	—	CE	ATM4-■5S
1 to 10 sec	—	SPDT (1c): 4	—	—	CE	ATM4-■10S
3 to 30 sec	—	SPDT (1c): 4	—	—	CE	ATM4-■30S
6 to 60 sec	—	SPDT (1c): 4	—	—	CE	ATM4-■60S
0.3 to 3 min	—	SPDT (1c): 4	—	—	CE	ATM4-■3M
0.5 to 5 min	—	SPDT (1c): 4	—	—	CE	ATM4-■5M
1 to 10 min	—	SPDT (1c): 4	—	—	CE	ATM4-■10M
3 to 30 min	—	SPDT (1c): 4	—	—	CE	ATM4-■30M
6 to 60 min	—	SPDT (1c): 4	—	—	CE	ATM4-■60M
0.3 to 3 hour	—	SPDT (1c): 4	—	—	CE	ATM4-■3H

0.1 to 1 sec, 1 to 10 sec, 0.1 to 1 min, 1 to 10 min, 0.1 to 1 hour, 1 to 10 hour	—	Time-limit SPDT (1c): 2 or Instantaneous SPDT (1c): 1+ Time-limit SPDT (1c): 1 depending on output operation mode	—	—	CE  us	ATS8-11
						ATS8-21
						ATS8-41
0.3 to 3 sec, 3 to 30 sec, 0.3 to 3 min, 3 to 30 min, 0.3 to 3 hour, 3 to 30 hour	—	Time-limit SPDT (1c): 2 or Instantaneous SPDT (1c): 1+ Time-limit SPDT (1c): 1 depending on output operation mode	—	—	CE  us	ATS8-13
						ATS8-23
						ATS8-43

Timers


Compact, LCD Display Timer (Indicator Only) / Programmable Timer / Timer (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Up · Down Timer / Thumbwheel Switch Setting Type LCD Display Timer / LCD Display Timer / Multi Function · λ - Δ · Power OFF Delay · General-Purpose Analog Timer

Series	Operation Method	Output Operation	Time Operation	Terminal	Power Supply
Compact Multi-Function Analog Timer ATS11 Series  W38xH42xL83.5mm	Time setting	SIGNAL ON DELAY, SIGNAL OFF DELAY, SIGNAL ON-OFF DELAY, FLICKER, INTERVAL	SIGNAL ON START	11-pin plug	12VDC
					24VAC, 24VDC
					100-240VAC, 24-240VDC
					12VDC
					24VAC, 24VDC
					100-240VAC, 24-240VDC
					12VDC
					24VAC, 24VDC
					100-240VAC, 24-240VDC
					12VDC
24VAC, 24VDC					
100-240VAC, 24-240VDC					
※Sold separately: 11-pin socket (PG-11, PS-11(N))					
Compact λ-Δ Analog Timer ATS8SD-4  W38xH42xL83.5mm	Time setting	STAR-DELTA	POWER ON START	8-pin plug	100-240VAC, 24-240VDC
					※Sold separately: 8-pin socket (PG-08, PS-08(N))
Compact Power OFF Delay Analog Timer ATS8P Series  W38xH42xL75.5mm	Time setting	POWER OFF DELAY	POWER OFF START	8-pin plug	24VAC, 24VDC
					200-240VAC
					100-120VAC
					24VAC, 24VDC
					200-240VAC
					100-120VAC
※Sold separately: 8-pin socket (PG-08, PS-08(N), MS-08)					
Compact Twin Analog Timer ATS8W Series  W38xH42xL75.5mm	Time setting	FLICKER	POWER ON START	8-pin plug	12VDC
					24VAC, 24VDC
					100-240VAC, 24-240VDC
					12VDC
					24VAC, 24VDC
					100-240VAC, 24-240VDC
※Sold separately: 8-pin socket (PG-08, PS-08(N), MS-08)					
Compact Twin Analog Timer ATS11W Series  W38xH42xL75.5mm	Time setting	FLICKER	POWER ON START	11-pin plug	12VDC
					24VAC, 24VDC
					100-240VAC, 24-240VDC
					12VDC
					24VAC, 24VDC
					100-240VAC, 24-240VDC
※Sold separately: 11-pin socket (PG-11, PS-11(N))					


Setting Range	Signal Input Method	Control Output		Protection Structure	Approval	Model
		Relay	NPN Open Collector			
0.1 to 1 sec, 1 to 10 sec, 0.1 to 1 min, 1 to 10 min, 0.1 to 1 hour, 1 to 10 hour	No-voltage input (NPN)	Time-limit SPDT (1c): 2	—	—	CE  US	ATS11-11D
						ATS11-21D
						ATS11-41D
0.3 to 3 sec, 3 to 30 sec, 0.3 to 3 min, 3 to 30 min, 0.3 to 3 hour, 3 to 30 hour	No-voltage input (NPN)	Time-limit SPDT (1c): 2	—	—	CE  US	ATS11-13D
						ATS11-23D
						ATS11-43D
0.1 to 1 sec, 1 to 10 sec, 0.1 to 1 min, 1 to 10 min, 0.1 to 1 hour, 1 to 10 hour	No-voltage input (NPN)	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	CE  US	ATS11-11E
						ATS11-21E
						ATS11-41E
0.3 to 3 sec, 3 to 30 sec, 0.3 to 3 min, 3 to 30 min, 0.3 to 3 hour, 3 to 30 hour	No-voltage input (NPN)	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	CE  US	ATS11-13E
						ATS11-23E
						ATS11-43E
0.5 to 5 sec, 1 to 10 sec, 5 to 50 sec, 10 to 100 sec	—	STAR contact: SPST (1a): 1, DELTA contact: SPST (1a): 1	—	—	CE  US	ATS8SD-4
0.1 to 1 sec, 1 to 10 sec	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS8P-2S
0.1 to 1 sec, 1 to 10 sec	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS8P-5S
0.1 to 1 sec, 1 to 10 sec	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS8P-6S
0.1 to 1 min, 1 to 10 min	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS8P-2M
0.1 to 1 min, 1 to 10 min	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS8P-5M
0.1 to 1 min, 1 to 10 min	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS8P-6M
0.1 to 1 sec, 1 to 10 sec, 0.1 to 1 min, 1 to 10 min, 0.1 to 1 hour, 1 to 10 hour	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS8W-11
	—	Instantaneous SPDT (1c): 1+	—	—	CE  US	ATS8W-21
	—	Time-limit SPDT (1c): 1 depending on output operation mode	—	—	CE  US	ATS8W-41
0.3 to 3 sec, 3 to 30 sec, 0.3 to 3 min, 3 to 30 min, 0.3 to 3 hour, 3 to 30 hour	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS8W-13
	—	Instantaneous SPDT (1c): 1+	—	—	CE  US	ATS8W-23
	—	Time-limit SPDT (1c): 1 depending on output operation mode	—	—	CE  US	ATS8W-43
0.1 to 1 sec, 1 to 10 sec, 0.1 to 1 min, 1 to 10 min, 0.1 to 1 hour, 1 to 10 hour	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS11W-11
	—	Instantaneous SPDT (1c): 1+	—	—	CE  US	ATS11W-21
	—	Time-limit SPDT (1c): 1 depending on output operation mode	—	—	CE  US	ATS11W-41
0.3 to 3 sec, 3 to 30 sec, 0.3 to 3 min, 3 to 30 min, 0.3 to 3 hour, 3 to 30 hour	—	Time-limit SPDT (1c): 2	—	—	CE  US	ATS11W-13
	—	Instantaneous SPDT (1c): 1+	—	—	CE  US	ATS11W-23
	—	Time-limit SPDT (1c): 1 depending on output operation mode	—	—	CE  US	ATS11W-43

Timers


Compact, LCD Display Timer (Indicator Only) / Programmable Timer / Timer (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Up · Down Timer / Thumbwheel Switch Setting Type LCD Display Timer / LCD Display Timer / Multi Function · λ - Δ · Power OFF Delay · General-Purpose Analog Timer

Series	Operation Method	Output Operation	Time Operation	Terminal	Power Supply
Multi Function Analog Timer AT8N Series  W48xH48xL64.5mm	Time setting	POWER ON DELAY, FLICKER, INTERVAL	POWER ON START	8-pin plug	12VDC 24VAC, 24V DC 100-240VAC, 24-240VDC


※Sold separately: 8-pin socket (PG-08, PS-08(N))

Multi Function Analog Timer AT11DN Series  W48xH48xL64.5mm	Time setting	SIGNAL ON DELAY, SIGNAL OFF DELAY, SIGNAL ON-OFF DELAY, FLICKER, INTERVAL	SIGNAL ON START	11-pin plug	12VDC 24VAC, 24VDC 100-240VAC, 24-240VDC
---	--------------	---	-----------------	-------------	--

※Sold separately: 11-pin socket (PG-11, PS-11(N))

Multi Function Analog Timer AT11EN Series  W48xH48xL64.5mm	Time setting	SIGNAL ON DELAY, SIGNAL OFF DELAY, SIGNAL ON-OFF DELAY, FLICKER, INTERVAL	SIGNAL ON START	11-pin plug	12VDC 24VAC, 24VDC 100-240VAC, 24-240VDC
--	--------------	---	-----------------	-------------	--

※Sold separately: 11-pin socket (PG-11, PS-11(N))


Series	Operation Method	Output Operation	Time Operation	Terminal	Power Supply
λ-Δ Analog Timer AT8SDN  W48xH48xL64.5mm	Time setting	STAR-DELTA	POWER ON START	8-pin plug	100-240VAC, 24-240VDC

※Sold separately: 8-pin socket (PG-08, PS-08(N))


Setting Range	Signal Input Method	Control Output		Protection Structure	Approval	Model
		Relay	NPN Open Collector			
0.05 to 0.5 sec, 0.1 to 1 sec, 0.5 to 5 sec, 1 to 10 sec, 0.05 to 0.5 min, 0.1 to 1 min, 0.5 to 5 min, 1 to 10 min, 0.05 to 0.5 hour, 0.1 to 1 hour, 0.5 to 5 hour, 1 to 10 hour, 5 to 50 hour, 10 to 100 hour	—	Time-limit SPDT (1c): 2 or Instantaneous SPDT (1c): 1 + Time-limit SPDT (1c): 1 depending on output operation mode	—	—	CE  us	AT8N-1
	—	Time-limit SPDT (1c): 2 or Instantaneous SPDT (1c): 1 + Time-limit SPDT (1c): 1 depending on output operation mode	—	—	CE  us	AT8N-2
	—	Time-limit SPDT (1c): 2 or Instantaneous SPDT (1c): 1 + Time-limit SPDT (1c): 1 depending on output operation mode	—	—	CE  us	AT8N
0.05 to 0.5 sec, 0.1 to 1 sec, 0.5 to 5 sec, 1 to 10 sec, 0.05 to 0.5 min, 0.1 to 1 min, 0.5 to 5 min, 1 to 10 min, 0.05 to 0.5 hour, 0.1 to 1 hour, 0.5 to 5 hour, 1 to 10 hour, 5 to 50 hour, 10 to 100 hour	No-voltage input (NPN)	Time-limit SPDT (1c): 2	—	—	CE  us	AT11DN-1
	No-voltage input (NPN)	Time-limit SPDT (1c): 2	—	—	CE  us	AT11DN-2
	No-voltage input (NPN)	Time-limit SPDT (1c): 2	—	—	CE  us	AT11DN
0.05 to 0.5 sec, 0.1 to 1 sec, 0.5 to 5 sec, 1 to 10 sec, 0.05 to 0.5 min, 0.1 to 1 min, 0.5 to 5 min, 1 to 10 min, 0.05 to 0.5 hour, 0.1 to 1 hour, 0.5 to 5 hour, 1 to 10 hour, 5 to 50 hour, 10 to 100 hour	No-voltage input (NPN)	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	CE  us	AT11EN-1
	No-voltage input (NPN)	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	CE  us	AT11EN-2
	No-voltage input (NPN)	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	CE  us	AT11EN
Setting Range	Signal Input Method	Control Output		Protection Structure	Approval	Model
0.5 to 5 sec, 1 to 10 sec, 5 to 50 sec, 10 to 100 sec	—	Relay	NPN Open Collector	—	CE  us	AT8SDN
		STAR contact: SPST (1a): 1, DELTA contact: SPST (1a): 1	—			

Timers


Compact, LCD Display Timer (Indicator Only) / Programmable Timer / Timer (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Up · Down Timer / Thumbwheel Switch Setting Type LCD Display Timer / LCD Display Timer / Multi Function · λ - Δ · Power OFF Delay · General-Purpose Analog Timer

Series	Operation Method	Output Operation	Time Operation	Terminal	Power Supply
Power OFF Delay Analog Timer AT8PSN Series  W48xH48xL64.5mm	Time setting	POWER OFF DELAY	POWER OFF START	8-pin plug	24VAC, 24VDC
					100-120VAC
					100/110VDC
					200-240VAC

※Sold separately: 8-pin socket (PG-08, PS-08(N))

Power OFF Delay Analog Timer AT8PMN Series  W48xH48xL64.5mm	Time setting	POWER OFF DELAY	POWER OFF START	8-pin plug	24VAC, 24VDC
					100-120VAC
					100/110VDC
					200-240VAC

※Sold separately: 8-pin socket (PG-08, PS-08(N))

Series	Operation Method	Output Operation	Time Operation	Terminal	Power Supply
General-Purpose, Analog Timer ATE Series  W48xH48xL80mm	Time setting	POWER ON DELAY	POWER ON START	8-pin plug	110VAC, 220VAC


※Sold separately: 8-pin socket (PG-08, PS-08(N)), Fixing bracket (PGB48-W)

Setting Range	Signal Input Method	Control Output		Protection Structure	Approval	Model
		Relay	NPN Open Collector			
0.05 to 0.5 sec, 0.1 to 1 sec, 0.5 to 5 sec, 1 to 10 sec	—	Time-limit SPDT (1c): 2	—	—	CE c RU us	AT8PSN-2
0.05 to 0.5 sec, 0.1 to 1 sec, 0.5 to 5 sec, 1 to 10 sec	—	Time-limit SPDT (1c): 2	—	—	CE c RU us	AT8PSN-6
0.05 to 0.5 sec, 0.1 to 1 sec, 0.5 to 5 sec, 1 to 10 sec	—	Time-limit SPDT (1c): 2	—	—	CE c RU us	AT8PSN-7
0.05 to 0.5 sec, 0.1 to 1 sec, 0.5 to 5 sec, 1 to 10 sec	—	Time-limit SPDT (1c): 2	—	—	CE c RU us	AT8PSN
0.05 to 0.5 min, 0.1 to 1 min, 0.5 to 5 min, 1 to 10 min	—	Time-limit SPDT (1c): 2	—	—	CE c RU us	AT8PMN-2
0.05 to 0.5 min, 0.1 to 1 min, 0.5 to 5 min, 1 to 10 min	—	Time-limit SPDT (1c): 2	—	—	CE c RU us	AT8PMN-6
0.05 to 0.5 min, 0.1 to 1 min, 0.5 to 5 min, 1 to 10 min	—	Time-limit SPDT (1c): 2	—	—	CE c RU us	AT8PMN-7
0.05 to 0.5 min, 0.1 to 1 min, 0.5 to 5 min, 1 to 10 min	—	Time-limit SPDT (1c): 2	—	—	CE c RU us	AT8PMN


Setting Range	Control Output		Protection Structure	Approval	Model
	Relay	NPN Open Collector			
0.1 to 1 sec	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-1S
0.3 to 3 sec	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-3S
0.6 to 6 sec	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-6S
1 to 10 sec	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-10S
3 to 30 sec	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-30S
0.6 to 60 sec	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-60S
0.3 to 3 min	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-3M
0.6 to 6 min	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-6M
1 to 10 min	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-10M
3 to 30 min	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-30M
0.6 to 60 min	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-60M
0.3 to 3 hour	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-3H
0.6 to 6 hour	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-6H
1.2 to 12 hour	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-12H
2.4 to 24 hour	Time-limit SPDT (1c): 1, Instantaneous SPST(1a): 1	—	—	—	ATE-24H

Timers

Compact, LCD Display Timer (Indicator Only) / Programmable Timer / Timer (Indicator Only) / Thumbwheel Switch Setting Type 8-Pin Plug Up · Down Timer / Thumbwheel Switch Setting Type LCD Display Timer / LCD Display Timer / Multi Function · λ - Δ · Power OFF Delay · General-Purpose Analog Timer

Series	Operation Method	Output Operation	Time Operation	Terminal	Power Supply
General-Purpose, Analog Timer ATE1 Series  W48xH48xL80mm	Time setting	POWER ON DELAY	POWER ON START	8-pin plug	220VAC
					220VAC
					24VDC
					220VAC
					220VAC
					110VAC
					24VDC
					110VAC
					220VAC
					110VAC
					24VDC
					220VAC
					110VAC
					24VDC

※Sold separately: 8-pin socket (PG-08, PS-08(N)), Fixing bracket (PGB48-W)

General-Purpose, Analog Timer ATE2 Series  W48xH48xL80mm	Time setting	POWER ON DELAY	POWER ON START	8-pin plug	220VAC
					220VAC
					24VDC
					220VAC
					220VAC
					24VDC
					220VAC
					24VDC
					220VAC
					24VDC
					220VAC
					24VDC
					220VAC
					220VAC

※Sold separately: 8-pin socket (PG-08, PS-08(N)), Fixing bracket (PGB48-W)

Setting Range	Control Output		Protection Structure	Approval	Model
	Relay	NPN Open Collector			
0.1 to 1 sec	Time-limit SPDT (1c): 2	—	—	—	ATE1-1S
0.3 to 3 sec	Time-limit SPDT (1c): 2	—	—	—	ATE1-3S
					ATE1-3S
0.6 to 6 sec	Time-limit SPDT (1c): 2	—	—	—	ATE1-6S
					ATE1-10S
1 to 10 sec	Time-limit SPDT (1c): 2	—	—	—	ATE1-10S
					ATE1-10S
					ATE1-10S
3 to 30 sec	Time-limit SPDT (1c): 2	—	—	—	ATE1-30S
					ATE1-30S
					ATE1-30S
6 to 60 sec	Time-limit SPDT (1c): 2	—	—	—	ATE1-60S
					ATE1-60S
					ATE1-60S
0.3 to 3 min	Time-limit SPDT (1c): 2	—	—	—	ATE1-3M
0.6 to 6 min	Time-limit SPDT (1c): 2	—	—	—	ATE1-6M
1 to 10 min	Time-limit SPDT (1c): 2	—	—	—	ATE1-10M
					ATE1-10M
3 to 30 min	Time-limit SPDT (1c): 2	—	—	—	ATE1-30M
6 to 60 min	Time-limit SPDT (1c): 2	—	—	—	ATE1-60M
0.3 to 3 hour	Time-limit SPDT (1c): 2	—	—	—	ATE1-3H
0.6 to 6 hour	Time-limit SPDT (1c): 2	—	—	—	ATE1-6H
1.2 to 12 hour	Time-limit SPDT (1c): 2	—	—	—	ATE1-12H
2.4 to 24 hour	Time-limit SPDT (1c): 2	—	—	—	ATE1-24H

0.1 to 1 sec	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-1S
					ATE2-3S
0.3 to 3 sec	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-3S
					ATE2-3S
0.6 to 6 sec	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-6S
					ATE2-10S
1 to 10 sec	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-10S
					ATE2-10S
3 to 30 sec	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-30S
					ATE2-30S
6 to 60 sec	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-60S
					ATE2-60S
0.3 to 3 min	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-3M
0.6 to 6 min	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-6M
1 to 10 min	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-10M
3 to 30 min	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-30M
6 to 60 min	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-60M
0.3 to 3 hour	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-3H
0.6 to 6 hour	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-6H
1.2 to 12 hour	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-12H
2.4 to 24 hour	Time-limit SPDT (1c): 1, Instantaneous SPDT (1c): 1	—	—	—	ATE2-24H

Panel Meters



Compact Multi Panel Meter / Compact Panel Meter / Loop Powered Scaling Meter / Graphic Panel Meter / Multi Panel Meter /

Series	Display Method	Character Height	Max. Display Range	Measurement	Input Specification	AC Measurement
Compact Multi Panel Meter M4NN Series  W48xH24xL56.3mm	4digit 7-segment LED	11mm	-1999 to 9999	DC voltage	-600-600V, -200-200V, -100-100V, -20-20V, -10-10V, -2-2V, -1-1V, -200-200mV	—
				AC voltage, Frequency	0-600V, 0-250V, 0-110V, 0-50V, 0-20V, 0-10V, 0-2V, 0-1V	Average value (AVG)
				DC current	-5-5A, -2-2A, -1-1A, -200-200mA, -100-100mA, -20-20mA, 4-20mA, -10-10mA, -2-2mA	—
				AC current, Frequency	0-5A, 0-2.5A, 0-1A, 0-500mA, 0-250mA, 0-100mA, 0-50mA	Average value (AVG)
Compact Panel Meter M4N Series  W48xH24xL59mm	3½digit 7-segment LED	10mm	0 to 1999	DC voltage	0-199.9mV	—
					0-1.999V	
					0-19.99V	
					0-199.9V	
					Option	
				DC current	0-199.9µA	—
					0-1.999mA	
					0-19.99mA	
					0-199.9mA	
					Option	
Digital scaling	DC4-20mA (1-5VDC)	—				
Loop Powered Scaling Meter M4NS  W48xH24xL48mm	4digit 7-segment LED	10mm	-1999 to 9999	Digital scaling	DC4-20mA	—
Loop Powered Scaling Meter M4YS  W72xH36xL77mm	4digit 7-segment LED	14mm	-1999 to 9999	Digital scaling	DC4-20mA	—
Graphic Panel Meter M4V  W75xH25xL93mm	4digit 7-segment LED	14mm	-999 to 9999	DC voltage	0-2V, 1-5V, 0-10V	—
				DC current	0-1mA, 4-20mA	—

Power Factor Display	Power Supply	Output		Approval	Model			
		Main Output (Comparative Value)	Sub Output (Display Value)					
●	5-24VDC	Indicator	—	CE	M4NN-DV-1N			
		NPN open collector (OUT1, GO, OUT2)	—		M4NN-DV-11			
		PNP open collector (OUT1, GO, OUT2)	—		M4NN-DV-12			
—	5-24VDC	Indicator	—	CE	M4NN-AV-1N			
		NPN open collector (OUT1, GO, OUT2)	—		M4NN-AV-11			
		PNP open collector (OUT1, GO, OUT2)	—		M4NN-AV-12			
●	5-24VDC	Indicator	—	CE	M4NN-DA-1N			
		NPN open collector (OUT1, GO, OUT2)	—		M4NN-DA-11			
		PNP open collector (OUT1, GO, OUT2)	—		M4NN-DA-12			
—	5-24VDC	Indicator	—	CE	M4NN-AA-1N			
		NPN open collector (OUT1, GO, OUT2)	—		M4NN-AA-11			
		PNP open collector (OUT1, GO, OUT2)	—		M4NN-AA-12			
—	5VDC	Indicator	—	—	M4N-DV-01			
	12-24VDC				M4N-DV-11			
	5VDC				M4N-DV-02			
	12-24VDC				M4N-DV-12			
	5VDC				M4N-DV-03			
	12-24VDC				M4N-DV-13			
	5VDC				M4N-DV-04			
	12-24VDC				M4N-DV-14			
—	5VDC	Indicator	—	—	M4N-DV-0X			
	12-24VDC				M4N-DV-1X			
	5VDC				Indicator	—	—	M4N-DA-01
	12-24VDC							M4N-DA-11
	5VDC							M4N-DA-02
	12-24VDC							M4N-DA-12
	5VDC							M4N-DA-03
	12-24VDC							M4N-DA-13
5VDC	M4N-DA-04							
12-24VDC	M4N-DA-14							
—	5VDC	Indicator	—	—	M4N-DA-0X			
	12-24VDC				M4N-DA-1X			
	5VDC				Indicator	—	—	M4N-DI-0X
	12-24VDC							M4N-DI-1X
—	Loop power	Indicator	—	—	M4NS-NA			
—	Loop power	Indicator	—	—	M4YS-NA			
—	12-24VDC	Indicator	—	—	M4V			
—	12-24VDC	Indicator	—	—				

Panel Meters

Compact Multi Panel Meter / Compact Panel Meter / Loop Powered Scaling Meter / Graphic Panel Meter / Multi Panel Meter /


Series	Display Method	Character Height	Max. Display Range	Measurement	Input Specification	AC Measurement
Multi Panel Meter MT4N Series  W48xH24xL83mm	4digit 7-segment LCD	9mm	-1999 to 9999	DC voltage	0-50V, 0-10V, 0-5V, 0-1V, 0-250mV, 0-50mV	—
				AC voltage, Frequency	0-250V, 0-125V, 0-50V, 0-25V, 0-5V, 0-2.5V	Average value (AVG), Root mean square value (RMS)
				DC current	0-500mA, 0-200mA, 0-50mA, 4-20mA, 0-5mA, 0-2mA	—
				AC current, Frequency	0-5A, 0-2.5A, 0-500mA, 0-250mA, 0-100mA, 0-50mA	Average value (AVG), Root mean square value (RMS)
Multi Panel Meter MT4Y Series  W72xH36xL77mm	4digit 7-segment LED	14.2mm	-1999 to 9999	DC voltage	0-500V, 0-100V, 0-50V, 0-10V, 0-5V, 0-1V, 0-250mV, 0-50mV	—
				AC voltage, Frequency	0-500V, 0-250V, 0-110V, 0-50V, 0-20V, 0-10V, 0-2V, 0-1V	Average value (AVG), Root mean square value (RMS)
				DC current	0-5A, 0-2A, 0-500mA, 0-200mA, 0-50mA, 4-20mA, 0-5mA, 0-2mA	—
				AC current, Frequency	0-5A, 0-2.5A, 0-1A, 0-500mA, 0-250mA, 0-100mA, 0-50mA	Average value (AVG), Root mean square value (RMS)

※1. Sold separately: Hirose connector socket (HIF3BA-14D-2.54R)

Power Factor Display	Power Supply	Output		Approval	Model
		Main Output (Comparative Value)	Sub Output (Display Value)		
—	■: Type E: 12-24VDC/AC 4: 100-240VAC	Indicator	—	CE (12-24VDC/AC)	MT4N-DV-■N
		Relay (OUT1, OUT2)	—		MT4N-DV-■0
		NPN open collector (OUT1, GO, OUT2)	—		MT4N-DV-■1
		PNP open collector (OUT1, GO, OUT2)	—		MT4N-DV-■2
		Relay (OUT1)	PV transmission (DC4-20mA)		MT4N-DV-■3
		Relay (OUT1)	RS485 communication		MT4N-DV-■4
		Relay (OUT1, OUT2)	PV transmission (DC4-20mA)		MT4N-DV-■5
—	■: Type E: 12-24VDC/AC 4: 100-240VAC	Indicator	—	CE (12-24VDC/AC)	MT4N-AV-■N
		Relay (OUT1, OUT2)	—		MT4N-AV-■0
		NPN open collector (OUT1, GO, OUT2)	—		MT4N-AV-■1
		PNP open collector (OUT1, GO, OUT2)	—		MT4N-AV-■2
		Relay (OUT1)	PV transmission (DC4-20mA)		MT4N-AV-■3
		Relay (OUT1)	RS485 communication		MT4N-AV-■4
		Relay (OUT1, OUT2)	PV transmission (DC4-20mA)		MT4N-AV-■5
—	■: Type E: 12-24VDC/AC 4: 100-240VAC	Indicator	—	CE (12-24VDC/AC)	MT4N-DA-■N
		Relay (OUT1, OUT2)	—		MT4N-DA-■0
		NPN open collector (OUT1, GO, OUT2)	—		MT4N-DA-■1
		PNP open collector (OUT1, GO, OUT2)	—		MT4N-DA-■2
		Relay (OUT1)	PV transmission (DC4-20mA)		MT4N-DA-■3
		Relay (OUT1)	RS485 communication		MT4N-DA-■4
		Relay (OUT1, OUT2)	PV transmission (DC4-20mA)		MT4N-DA-■5
—	■: Type E: 12-24VDC/AC 4: 100-240VAC	Indicator	—	CE (12-24VDC/AC)	MT4N-AA-■N
		Relay (OUT1, OUT2)	—		MT4N-AA-■0
		NPN open collector (OUT1, GO, OUT2)	—		MT4N-AA-■1
		PNP open collector (OUT1, GO, OUT2)	—		MT4N-AA-■2
		Relay (OUT1)	PV transmission (DC4-20mA)		MT4N-AA-■3
		Relay (OUT1)	RS485 communication		MT4N-AA-■4
		Relay (OUT1, OUT2)	PV transmission (DC4-20mA)		MT4N-AA-■5
—	100-240VAC	Indicator	—	CE c RU US	MT4Y-DV-4N
		Relay (HI, GO, LO)	—		MT4Y-DV-40
		NPN open collector (HI, GO, LO)	—		MT4Y-DV-41
		PNP open collector (HI, GO, LO)	—		MT4Y-DV-42
		Relay (LO)	PV transmission (DC4-20mA)		MT4Y-DV-43
		Relay (LO)	RS485 communication		MT4Y-DV-44
		—	BCD dynamic		MT4Y-DV-45 ^{×1}
		—	Low speed serial		MT4Y-DV-46
—	100-240VAC	Indicator	—	CE c RU US	MT4Y-AV-4N
		Relay (HI, GO, LO)	—		MT4Y-AV-40
		NPN open collector (HI, GO, LO)	—		MT4Y-AV-41
		PNP open collector (HI, GO, LO)	—		MT4Y-AV-42
		Relay (LO)	PV transmission (DC4-20mA)		MT4Y-AV-43
		Relay (LO)	RS485 communication		MT4Y-AV-44
		—	BCD dynamic		MT4Y-AV-45 ^{×1}
		—	Low speed serial		MT4Y-AV-46
—	100-240VAC	Indicator	—	CE c RU US	MT4Y-DA-4N
		Relay (HI, GO, LO)	—		MT4Y-DA-40
		NPN open collector (HI, GO, LO)	—		MT4Y-DA-41
		PNP open collector (HI, GO, LO)	—		MT4Y-DA-42
		Relay (LO)	PV transmission (DC4-20mA)		MT4Y-DA-43
		Relay (LO)	RS485 communication		MT4Y-DA-44
		—	BCD dynamic		MT4Y-DA-45 ^{×1}
		—	Low speed serial		MT4Y-DA-46
—	100-240VAC	Indicator	—	CE c RU US	MT4Y-AA-4N
		Relay (HI, GO, LO)	—		MT4Y-AA-40
		NPN open collector (HI, GO, LO)	—		MT4Y-AA-41
		PNP open collector (HI, GO, LO)	—		MT4Y-AA-42
		Relay (LO)	PV transmission (DC4-20mA)		MT4Y-AA-43
		Relay (LO)	RS485 communication		MT4Y-AA-44
		—	BCD dynamic		MT4Y-AA-45 ^{×1}
		—	Low speed serial		MT4Y-AA-46

Panel Meters

Compact Multi Panel Meter / Compact Panel Meter / Loop Powered Scaling Meter / Graphic Panel Meter / Multi Panel Meter /

Series	Display Method	Character Height	Max. Display Range	Measurement	Input Specification	AC Measurement
Multi Panel Meter MT4W Series ^{※1}	 4digit 7-segment LED	14.2mm	-1999 to 9999	DC voltage	0-500V, 0-100V, 0-50V, 0-10V, 0-5V, 0-1V, 0-250mV, 0-50mV	—
				AC voltage, Frequency	0-500V, 0-250V, 0-110V, 0-50V, 0-20V, 0-10V, 0-2V, 0-1V	Average value (AVG), Root mean square value (RMS)
				DC current	0-5A, 0-2A, 0-500mA, 0-200mA, 0-50mA, 4-20mA, 0-5mA, 0-2mA	—
				AC current, Frequency	0-5A, 0-2.5A, 0-1A, 0-500mA, 0-250mA, 0-100mA, 0-50mA	Average value (AVG), Root mean square value (RMS)

W96xH48xL100mm

※1. Rear size of MT4W Series is based on indicator model. In case of output model, rear size may be longer due to output Hirose connector.
 ※2. Sold separately: Hirose connector socket (HIF3BA-20D-2.54R)

Power Factor Display	Power Supply	Output		Approval	Model	
		Main Output (Comparative Value)	Sub Output (Display Value)			
—	12-24VDC	Indicator	—	CE	MT4W-DV-1N	
		Relay (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-DV-10	
		Relay (HI, GO, LO)	—		MT4W-DV-11	
	100-240VAC	100-240VAC	Indicator	—	CE cRU US	MT4W-DV-4N
			Relay (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-DV-40
			Relay (HI, GO, LO)	—		MT4W-DV-41
			NPN open collector (HI, GO, LO)	BCD dynamic		MT4W-DV-42 ^{*2}
			PNP open collector (HI, GO, LO)	BCD dynamic		MT4W-DV-43 ^{*2}
			NPN open collector (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-DV-44 ^{*2}
			PNP open collector (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-DV-45 ^{*2}
			NPN open collector (HI, GO, LO)	Low speed serial		MT4W-DV-46 ^{*2}
			PNP open collector (HI, GO, LO)	Low speed serial		MT4W-DV-47 ^{*2}
			NPN open collector (HI, GO, LO)	RS485 communication		MT4W-DV-48 ^{*2}
			PNP open collector (HI, GO, LO)	RS485 communication		MT4W-DV-49 ^{*2}
			—	12-24VDC		Indicator
Relay (HI, GO, LO)	PV transmission (DC4-20mA)	MT4W-AV-10				
Relay (HI, GO, LO)	—	MT4W-AV-11				
100-240VAC	100-240VAC	Indicator		—	CE cRU US	MT4W-AV-4N
		Relay (HI, GO, LO)		PV transmission (DC4-20mA)		MT4W-AV-40
		Relay (HI, GO, LO)		—		MT4W-AV-41
		NPN open collector (HI, GO, LO)		BCD dynamic		MT4W-AV-42 ^{*2}
		PNP open collector (HI, GO, LO)		BCD dynamic		MT4W-AV-43 ^{*2}
		NPN open collector (HI, GO, LO)		PV transmission (DC4-20mA)		MT4W-AV-44 ^{*2}
		PNP open collector (HI, GO, LO)		PV transmission (DC4-20mA)		MT4W-AV-45 ^{*2}
		NPN open collector (HI, GO, LO)		Low speed serial		MT4W-AV-46 ^{*2}
		PNP open collector (HI, GO, LO)		Low speed serial		MT4W-AV-47 ^{*2}
		NPN open collector (HI, GO, LO)		RS485 communication		MT4W-AV-48 ^{*2}
		PNP open collector (HI, GO, LO)		RS485 communication		MT4W-AV-49 ^{*2}
		—		12-24VDC		Indicator
Relay (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-DA-10			
Relay (HI, GO, LO)	—		MT4W-DA-11			
NPN open collector (HI, GO, LO)	RS485 communication		MT4W-DA-18 ^{*2}			
100-240VAC	100-240VAC		Indicator	—	CE cRU US	MT4W-DA-4N
			Relay (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-DA-40
			Relay (HI, GO, LO)	—		MT4W-DA-41
			NPN open collector (HI, GO, LO)	BCD dynamic		MT4W-DA-42 ^{*2}
			PNP open collector (HI, GO, LO)	BCD dynamic		MT4W-DA-43 ^{*2}
			NPN open collector (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-DA-44 ^{*2}
			PNP open collector (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-DA-45 ^{*2}
			NPN open collector (HI, GO, LO)	Low speed serial		MT4W-DA-46 ^{*2}
			PNP open collector (HI, GO, LO)	Low speed serial		MT4W-DA-47 ^{*2}
			NPN open collector (HI, GO, LO)	RS485 communication		MT4W-DA-48 ^{*2}
			PNP open collector (HI, GO, LO)	RS485 communication		MT4W-DA-49 ^{*2}
—	12-24VDC	Indicator	—	CE	MT4W-AA-1N	
		Relay (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-AA-10	
		Relay (HI, GO, LO)	—		MT4W-AA-11	
	100-240VAC	100-240VAC	Indicator	—	CE cRU US	MT4W-AA-4N
			Relay (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-AA-40
			Relay (HI, GO, LO)	—		MT4W-AA-41
			NPN open collector (HI, GO, LO)	BCD dynamic		MT4W-AA-42 ^{*2}
			PNP open collector (HI, GO, LO)	BCD dynamic		MT4W-AA-43 ^{*2}
			NPN open collector (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-AA-44 ^{*2}
			PNP open collector (HI, GO, LO)	PV transmission (DC4-20mA)		MT4W-AA-45 ^{*2}
			NPN open collector (HI, GO, LO)	Low speed serial		MT4W-AA-46 ^{*2}
			PNP open collector (HI, GO, LO)	Low speed serial		MT4W-AA-47 ^{*2}
			NPN open collector (HI, GO, LO)	RS485 communication		MT4W-AA-48 ^{*2}
			PNP open collector (HI, GO, LO)	RS485 communication		MT4W-AA-49 ^{*2}

CONTROLLER

Temperature Controllers

SSRs / Power Controllers

Counters

Timers

Panel Meters

Tacho / Speed / Pulse Meters

Display Units

Sensor Controllers

Switching Mode Power Supplies

Graphic / Logic Panels

Field Network Devices

Panel Meters

Compact Multi Panel Meter / Compact Panel Meter / Loop Powered Scaling Meter / Graphic Panel Meter / Multi Panel Meter /

Series	Display Method	Character Height	Measurement	Input Specification	Max. Display Range
Digital Panel Meter M4Y Series		14mm	DC voltage	199.9mV	0 to 199.9
				1.999V	0 to 1.999
				19.99V	0 to 19.99
				199.9V	0 to 199.9
				300V	0 to 300
				Option	0 to 1999
			AC voltage	199.9mV	0 to 199.9
				1.999V	0 to 1.999
				19.99V	0 to 19.99
				199.9V	0 to 199.9
				400V	0 to 400
			Option	0 to 1999	
			DC current	199.9μA	0 to 199.9
				1.999mA	0 to 1.999
				19.99mA	0 to 19.99
				199.9mA	0 to 199.9
				1.999A	0 to 1.999
				20A/50mV (shunt)	0 to 19.99
				200A/50mV (shunt)	0 to 199.9
				2000A/50mV (shunt)	0 to 1999
			Option	0 to 1999	
			AC current	19.99mA	0 to 19.99
				199.9mA	0 to 199.9
				1.999A	0 to 1.999
				20A/5A (CT)	0 to 19.99
				200A/5A (CT)	0 to 199.9
				2000A/5A (CT)	0 to 1999
				Option	0 to 1999
			AC electric power	199.9W ^{※1}	0 to 199.9
				1.999kW ^{※1}	0 to 1.999
				19.99kW ^{※1}	0 to 19.99
				199.9kW ^{※1}	0 to 199.9
				Option	0 to 1999
Rotation	0-10VDC	0 to 1999			
	0-10VAC	0 to 1999			
	DC INPUT option	0 to 1999			
	AC INPUT option	0 to 1999			
Speed	0-10VDC	0 to 1999			
	0-10VAC	0 to 1999			
	DC INPUT option	0 to 1999			
Digital scaling	DC4-20mA (1-5VDC)	0 to 1999			



W72xH36xL93mm

3½digit
7-segment LED

※1. Max. display value when output specification 0-10VDC of power transducer as display specification.

AC Measurement	Power Supply (Option)	Output	Approval	Model
—	100-240VAC (24-70VDC)	Indicator	—	M4Y-DV-1
				M4Y-DV-2
				M4Y-DV-3
				M4Y-DV-4
				M4Y-DV-5
				M4Y-DV-XX
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AV-1
Average value (AVG)	100-240VAC			M4Y-AV-2
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AV-3
Root mean square value (RMS)	100-240VAC (5VDC)			M4Y-AVR-3
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AV-4
Root mean square value (RMS)	100-240VAC (5VDC)			M4Y-AVR-4
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AV-6
Root mean square value (RMS)	100-240VAC (5VDC)			M4Y-AVR-6
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AV-XX
Root mean square value (RMS)	100-240VAC (5VDC)			M4Y-AVR-XX
—	100-240VAC	Indicator	—	M4Y-DA-1
				M4Y-DA-2
				M4Y-DA-3
				M4Y-DA-4
				M4Y-DA-5
				M4Y-DA-6
				M4Y-DA-7
				M4Y-DA-8
				M4Y-DA-XX
				Average value (AVG)
Root mean square value (RMS)	M4Y-AAR-1			
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AA-2
Root mean square value (RMS)				M4Y-AAR-2
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AA-3
Root mean square value (RMS)				M4Y-AAR-3
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AA-4
Root mean square value (RMS)				M4Y-AA4-4
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AA-5
Root mean square value (RMS)				M4Y-AAR-5
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AA-6
Root mean square value (RMS)				M4Y-AAR-6
Average value (AVG)	100-240VAC	Indicator	—	M4Y-AA-XX
Root mean square value (RMS)				M4Y-AAR-XX
—	100-240VAC	Indicator	—	M4Y-W-1
				M4Y-W-2
				M4Y-W-3
				M4Y-W-4
				M4Y-W-XX
—	100-240VA	Indicator	—	M4Y-T-1
Average value (AVG)				M4Y-T-2
—				M4Y-T-DX
Average value (AVG)	100-240VAC	Indicator	—	M4Y-T-AX
—				M4Y-S-1
Average value (AVG)				M4Y-S-2
Root mean square value (RMS)	100-240VAC	Indicator	—	M4Y-SR-2
—				M4Y-S-DX
—	100-240VAC (24-70VDC)	Indicator	—	M4Y-DI-XX

Panel Meters

Compact Multi Panel Meter / Compact Panel Meter / Loop Powered Scaling Meter / Graphic Panel Meter / Multi Panel Meter /

Series	Display Method	Character Height	Measurement	Input Specification	Max. Display Range
Digital Panel Meter M5W Series		14mm	DC voltage	199.99mV	0 to 199.99
				1.9999V	0 to 1.9999
				19.999V	0 to 19.999
				199.99V	0 to 199.99
				300V	0 to 300
				Option	0 to 19999
			AC voltage	199.99mV	0 to 199.99
				1.9999V	0 to 1.9999
				19.999V	0 to 19.999
				199.99V	0 to 199.99
				400V	0 to 400
				Option	0 to 19999
			DC current	199.99μA	0 to 199.99
				1.9999mA	0 to 1.9999
				19.999mA	0 to 19.999
				199.99mA	0 to 199.99
				1.9999A	0 to 1.9999
				20A/50mV (shunt)	0 to 19.999
				200A/50mV (shunt)	0 to 199.99
				2000A/50mV (shunt)	0 to 1999.9
			Option	0 to 19999	
			AC current	19.999mA	0 to 19.999
				199.99mA	0 to 199.99
				1.9999A	0 to 1.9999
				20A/5A (CT)	0 to 19.999
				200A/5A (CT)	0 to 199.99
				2000A/5A (CT)	0 to 1999.9
				Option	0 to 19999
			AC electric power	199.99W ^{※1}	0 to 199.99
				1.9999kW ^{※1}	0 to 1.9999
				19.999kW ^{※1}	0 to 19.999
				199.99kW ^{※1}	0 to 199.99
				1999.9kW ^{※1}	0 to 1999.9
Option	0 to 19999				
Rotation	0-10VDC	0 to 1999.9			
	0-10VAC	0 to 1999.9			
	AC INPUT option	0 to 19999			
Speed	0-10VDC	0 to 1999.9			
	0-10VAC	0 to 1999.9			
	AC INPUT option	0 to 19999			
Digital scaling	DC4-20mA (1-5VDC)	0 to 19999			



W96xH48xL104mm


4½digit
7-segment LED

※1. Max. display value when output specification 0-10VDC of power transducer as display specification.

AC Measurement	Power Supply	Output	Approval	Model
—	100-240VAC	Indicator	—	M5W-DV-1
				M5W-DV-2
				M5W-DV-3
				M5W-DV-4
				M5W-DV-5
				M5W-DV-XX
Root mean square value (RMS)	100-240VAC	Indicator	—	M5W-AV-1
				M5W-AV-2
				M5W-AV-3
				M5W-AV-4
				M5W-AV-5
				M5W-AV-XX
—	100-240VAC	Indicator	—	M5W-DA-1
				M5W-DA-2
				M5W-DA-3
				M5W-DA-4
				M5W-DA-5
				M5W-DA-6
				M5W-DA-7
				M5W-DA-8
				M5W-DA-XX
Root mean square value (RMS)	100-240VAC	Indicator	—	M5W-AA-1
				M5W-AA-2
				M5W-AA-3
				M5W-AA-4
				M5W-AA-5
				M5W-AA-6
				M5W-AA-XX
—	100-240VAC	Indicator	—	M5W-W-1
				M5W-W-2
				M5W-W-3
				M5W-W-4
				M5W-W-5
				M5W-W-XX
—	100-240VAC	Indicator	—	M5W-S-1
				M5W-S-2
				M5W-S-AX
Root mean square value (RMS)	100-240VAC	Indicator	—	M5W-T-1
				M5W-T-2
				M5W-T-AX
—	100-240VAC	Indicator	—	M5W-DI-XX

Panel Meters

Compact Multi Panel Meter / Compact Panel Meter / Loop Powered Scaling Meter / Graphic Panel Meter / Multi Panel Meter /


Series	Display Method	Character Height	Measurement	Input Specification	Max. Display Range
Digital Panel Meter M4W Series  W96xH48xL104mm	3½digit 7-segment LED	14mm	DC voltage	199.9mV	0 to 199.9
				1.999V	0 to 1.999
				19.99V	0 to 19.99
				199.9V	0 to 199.9
				300V	0 to 300
			Option	0 to 1999	
			AC voltage	199.9mV	0 to 199.9
				1.999V	0 to 1.999
				19.99V	0 to 19.99
				199.9V	0 to 199.9
				400V	0 to 400
			Option	0 to 1999	
			DC current	199.9μA	0 to 199.9
				1.999mA	0 to 1.999
				19.99mA	0 to 19.99
				199.9mA	0 to 199.9
				1.999A	0 to 1.999
				20A/50mV (shunt)	0 to 19.99
				200A/50mV (shunt)	0 to 199.9
				2000A/50mV (shunt)	0 to 1999
			Option	0 to 1999	
			AC current	19.99mA	0 to 19.99
				199.9mA	0 to 199.9
				1.999A	0 to 1.999
				20A/5A (CT)	0 to 19.99
				200A/5A (CT)	0 to 199.9
				2000A/5A (CT)	0 to 1999
				Option	0 to 1999
			AC electric power	199.9W ^{※1}	0 to 199.9
				1.999kW ^{※1}	0 to 1.999
				19.99kW ^{※1}	0 to 19.99
				199.9kW ^{※1}	0 to 199.9
				1999kW ^{※1}	0 to 1999
				Option	0 to 1999
			Rotation	0-10VDC	0 to 1999
				0-10VAC	0 to 1999
				DC INPUT option	0 to 1999
			Speed	0-10VDC	0 to 1999
				0-10VAC	0 to 1999
				DC INPUT option	0 to 1999
				AC INPUT option	0 to 1999
			Digital scaling	DC4-20mA (1-5VDC)	0 to 1999
Power factor	DC4-20mA (power factor transducer option)	-0.50 to 1.00 to +0.50			

※1. Max. display value when output specification 0-10VDC of power transducer as display specification.

AC Measurement	Power Supply (Option)	Output	Approval	Model
—	110/220VAC (100-240VAC)	Indicator	—	M4W-DV-1
				M4W-DV-2
				M4W-DV-3
				M4W-DV-4
				M4W-DV-5
				M4W-DV-XX
Average value (AVG)	110/220VAC	Indicator	—	M4W-AV-1
Root mean square value (RMS)	110/220VAC (100-240VAC)			M4W-AVR-1
Average value (AVG)	110/220VAC	Indicator	—	M4W-AV-2
Average value (AVG)	110/220VAC			M4W-AV-3
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AVR-3
Average value (AVG)	110/220VAC			M4W-AV-4
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AVR-4
Average value (AVG)	110/220VAC			M4W-AV-6
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AVR-6
Average value (AVG)	110/220VAC			M4W-AV-XX
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AVR-XX
—	110/220VAC	Indicator	—	M4W-DA-1
				M4W-DA-2
				M4W-DA-3
				M4W-DA-4
				M4W-DA-5
				M4W-DA-6
				M4W-DA-7
				M4W-DA-8
				M4W-DA-XX
				Average value (AVG)
Average value (AVG)	110/220VAC	M4W-AA-2		
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AAR-2
Average value (AVG)	110/220VAC			M4W-AA-3
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AAR-3
Average value (AVG)	110/220VAC			M4W-AA-4
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AAR-4
Average value (AVG)	110/220VAC			M4W-AA-5
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AAR-5
Average value (AVG)	110/220VAC			M4W-AA-6
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AAR-6
Average value (AVG)	110/220VAC			M4W-AA-XX
Root mean square value (RMS)	110/220VAC (100-240VAC)	Indicator	—	M4W-AAR-XX
—	110/220VAC	Indicator	—	M4W-W-1
				M4W-W-2
				M4W-W-3
				M4W-W-4
				M4W-W-5
				M4W-W-XX
—	110/220VAC (24-70VDC, 100-240VAC)	Indicator	—	M4W-T-1
Average value (AVG)	110/220VAC			M4W-T-2
—	110/220VAC (24-70VDC, 100-240VAC)			M4W-T-DX
—	110/220VAC (100-240VAC)	Indicator	—	M4W-S-1
Average value (AVG)	110/220VAC			M4W-S-2
—	110/220VAC (24-70VDC, 100-240VAC)			M4W-S-DX
Average value (AVG)	110/220VAC			M4W-S-AX
—	110/220VAC (100-240VAC)	Indicator	—	M4W-DI-XX
—	110/220VAC	Indicator	—	M4W-P

Panel Meters

Compact Multi Panel Meter / Compact Panel Meter / Loop Powered Scaling Meter / Graphic Panel Meter / Multi Panel Meter /


Series	Display Method	Character Height	Measurement	Input Specification	Max. Display Range
Digital Panel Meter M4W1P Series  W96xH48xL104mm	3½digit 7-segment LED	10mm	DC voltage	199.9mV	0 to 199.9
				1.999V	0 to 1.999
				19.99V	0 to 19.99
				199.9V	0 to 199.9
				300V	0 to 300
				Option	0 to 1999
			AC voltage	199.9mV	0 to 199.9
				1.999V	0 to 1.999
				19.99V	0 to 19.99
				199.9V	0 to 199.9
				400V	0 to 400
				Option	0 to 1999
			DC current	199.9μA	0 to 199.9
				1.999mA	0 to 1.999
				19.99mA	0 to 19.99
				199.9mA	0 to 199.9
				1.999A	0 to 1.999
				20A/50mV (shunt)	0 to 19.99
				200A/50mV (shunt)	0 to 199.9
				2000A/50mV (shunt)	0 to 1999
			Option	0 to 1999	
			AC current	19.99mA	0 to 19.99
				199.9mA	0 to 199.9
				1.999A	0 to 1.999
				20A/5A (CT)	0 to 19.99
				200A/5A (CT)	0 to 199.9
				2000A/5A (CT)	0 to 1999
				Option	0 to 1999
			AC electric power	199.9W ^{※1}	0 to 199.9
				19.99kW ^{※1}	0 to 19.99
				199.9kW ^{※1}	0 to 199.9
				1999kW ^{※1}	0 to 1999
Rotation	0-10VDC	0 to 1999			
	0-10VAC	0 to 1999			
	DC INPUT option	0 to 1999			
	AC INPUT option	0 to 1999			
Speed	0-10VDC	0 to 1999			
	DC INPUT option	0 to 1999			
Digital scaling	DC4-20mA (1-5VDC)	0 to 1999			

※1. Max. display value when output specification 0-10VDC of power transducer as display specification.

AC Measurement	Power Supply (Option)	Output	Approval	Model
—	110/220VAC (24-70VDC, 100-240VAC)	Relay (HI)	—	M4W1P-DV-1
				M4W1P-DV-2
				M4W1P-DV-3
				M4W1P-DV-4
				M4W1P-DV-5
				M4W1P-DV-XX
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AV-1
Root mean square value (RMS)	110/220VAC (100-240VAC)			M4W1P-AVR-1
Root mean square value (RMS)	110/220VAC (100-240VAC)	Relay (HI)	—	M4W1P-AVR-2
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AV-3
Root mean square value (RMS)	110/220VAC (100-240VAC)			M4W1P-AVR-3
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AV-4
Root mean square value (RMS)	110/220VAC (100-240VAC)			M4W1P-AVR-4
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AV-6
Root mean square value (RMS)	110/220VAC (100-240VAC)			M4W1P-AVR-6
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AV-XX
Root mean square value (RMS)	110/220VAC (100-240VAC)			M4W1P-AVR-XX
—	110/220VAC	Relay (HI)	—	M4W1P-DA-1
				M4W1P-DA-2
				M4W1P-DA-3
				M4W1P-DA-4
				M4W1P-DA-5
				M4W1P-DA-6
				M4W1P-DA-7
				M4W1P-DA-8
				M4W1P-DA-XX
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AA-1
Root mean square value (RMS)				M4W1P-AAR-1
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AA-2
Root mean square value (RMS)				M4W1P-AAR-2
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AA-3
Root mean square value (RMS)				M4W1P-AAR-3
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AA-4
Root mean square value (RMS)				M4W1P-AAR-4
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AA-5
Root mean square value (RMS)				M4W1P-AAR-5
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AA-6
Root mean square value (RMS)				M4W1P-AAR-6
Average value (AVG)	110/220VAC	Relay (HI)	—	M4W1P-AA-XX
Root mean square value (RMS)				M4W1P-AAR-XX
—	110/220VAC	Relay (HI)	—	M4W1P-W-1
				M4W1P-W-3
				M4W1P-W-4
				M4W1P-W-5
—	110/220VAC	Relay (HI)	—	M4W1P-T-1
				Average value (AVG)
Root mean square value (RMS)	(100-240VAC)			M4W1P-TR-2
—	(100-240VAC)			M4W1P-T-DX
	Root mean square value (RMS)			(24-70VDC)
—	110/220VAC (100-240VAC)			Relay (HI)
	(100-240VAC)	M4W1P-S-DX		
—	110/220VAC	Relay (HI)	—	M4W1P-DI-XX

Panel Meters

Compact Multi Panel Meter / Compact Panel Meter / Loop Powered Scaling Meter / Graphic Panel Meter / Multi Panel Meter /




Series	Display Method	Character Height	Measurement	Input Specification	Max. Display Range
Digital Panel Meter M4W2P Series  W96xH48xL104mm	3½digit 7-segment LED	10mm	DC voltage	199.9mV	0 to 199.9
				1.999V	0 to 1.999
				19.99V	0 to 19.99
				199.9V	0 to 199.9
				300V	0 to 300
				Option	0 to 1999
			AC voltage	199.9mV	0 to 199.9
				1.999V	0 to 1.999
				19.99V	0 to 19.99
				199.9V	0 to 199.9
				400V	0 to 400
				Option	0 to 1999
			DC current	199.9μA	0 to 199.9
				1.999mA	0 to 1.999
				19.99mA	0 to 19.99
				199.9mA	0 to 199.9
				1.999A	0 to 1.999
				20A/50mV (shunt)	0 to 19.99
				200A/50mV (shunt)	0 to 199.9
				2000A/50mV (shunt)	0 to 1999
			AC current	Option	0 to 1999
				19.99mA	0 to 19.99
				199.9mA	0 to 199.9
				1.999A	0 to 1.999
				20A/5A (CT)	0 to 19.99
				200A/5A (CT)	0 to 199.9
				2000A/5A (CT)	0 to 1999
			AC electric power	Option	0 to 1999
				199.9W ^{※1}	0 to 199.9
				1.999kW ^{※1}	0 to 1.999
				199.9kW ^{※1}	0 to 199.9
			Rotation	Option	0 to 1999
				0-10VDC	0 to 1999
				0-10VAC	0 to 1999
				DC INPUT option	0 to 1999
			Speed	AC INPUT option	0 to 1999
0-10VDC	0 to 1999				
0-10VAC	0 to 1999				
Digital scaling	DC INPUT option	0 to 1999			
	DC4-20mA (1-5VDC)	0 to 1999			

※1. Max. display value when output specification 0-10VDC of power transducer as display specification.

AC Measurement	Power Supply (Option)	Output	Approval	Model
—	110/220VAC (24-70VDC, 100-240VAC)	Relay (HI, LOW)	—	M4W2P-DV-1
				M4W2P-DV-2
				M4W2P-DV-3
				M4W2P-DV-4
				M4W2P-DV-5
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-DV-XX
Root mean square value (RMS)				M4W2P-AV-1
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AV-2
Root mean square value (RMS)				M4W2P-AV-R-1
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AV-3
Root mean square value (RMS)				M4W2P-AV-R-2
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AV-4
Root mean square value (RMS)				M4W2P-AV-R-3
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AV-6
Root mean square value (RMS)				M4W2P-AV-R-4
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AV-XX
Root mean square value (RMS)				M4W2P-AV-R-XX
—	110/220VAC (100-240VAC)	Relay (HI, LOW)	—	M4W2P-DA-1
				M4W2P-DA-2
				M4W2P-DA-3
				M4W2P-DA-4
				M4W2P-DA-5
				M4W2P-DA-6
				M4W2P-DA-7
				M4W2P-DA-8
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-DA-XX
Root mean square value (RMS)				M4W2P-AA-1
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AA-2
Root mean square value (RMS)				M4W2P-AA-R-2
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AA-3
Root mean square value (RMS)				M4W2P-AA-R-3
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AA-4
Root mean square value (RMS)				M4W2P-AA-R-4
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AA-5
Root mean square value (RMS)				M4W2P-AA-R-5
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AA-6
Root mean square value (RMS)				M4W2P-AA-R-6
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-AA-XX
Root mean square value (RMS)				M4W2P-AA-R-XX
—	110/220VAC	Relay (HI, LOW)	—	M4W2P-W-1
				M4W2P-W-2
				M4W2P-W-4
				M4W2P-W-XX
Average value (AVG)	110/220VAC	Relay (HI, LOW)	—	M4W2P-T-1
—				M4W2P-T-2
Average value (AVG)	(100-240VAC)	Relay (HI, LOW)	—	M4W2P-T-DX
—	110/220VAC			M4W2P-T-AX
Root mean square value (RMS)	110/220VAC	Relay (HI, LOW)	—	M4W2P-S-1
—				(100-240VAC)
—	110/220VAC	Relay (HI, LOW)	—	M4W2P-S-DX
—				M4W2P-S-XX

Panel Meters






Compact Multi Panel Meter / Compact Panel Meter / Loop Powered Scaling Meter / Graphic Panel Meter / Multi Panel Meter /

Series	Display Method	Character Height	Measurement	Input Specification	Max. Display Range
Digital Panel Meter M4M Series  W72xH72xL113mm	3½digit 7-segment LED	10mm	DC voltage	19.99V	0 to 19.99
				Option	0 to 1999
			AC voltage	400V	0 to 400
			AC current	200A/5A (CT)	0 to 199.9
				Option	0 to 1999
			Digital Panel Meter M4M1P Series  W72xH72xL113mm	3½digit 7-segment LED	10mm
199.9V	0 to 199.9				
Option	0 to 1999				
AC voltage	Option	0 to 1999			
AC current	200A/5A (CT)	0 to 199.9			
	Option	0 to 1999			
Digital scaling	DC4-20mA (1-5VDC)	0 to 1999			
Digital Panel Meter M4M2P Series  W72xH72xL113mm	3½digit 7-segment LED	10mm			
			300V	0 to 300	
			Option	0 to 1999	
			AC voltage	19.99V	0 to 19.99
				400V	0 to 400
				Option	0 to 1999
			DC current	1.999A	0 to 1.999
			AC current	20A/5A (CT)	0 to 19.99
				200A/5A (CT)	0 to 199.9
				Option	0 to 1999
			Digital scaling	DC4-20mA (1-5VDC)	0 to 1999

AC Measurement	Power Supply (Option)	Output	Approval	Model
—	110/220VAC	Indicator	—	M4M-DV-3
				M4M-DV-XX
Average value (AVG)	110/220VAC	Indicator	—	M4M-AV-6
Root mean square value (RMS)				M4M-AVR-6
Average value (AVG)	110/220VAC	Indicator	—	M4M-AA-5
Average value (AVG)				M4M-AA-XX
—	110/220VAC	Relay (HI)	—	M4M1P-DV-1
				M4M1P-DV-4
				M4M1P-DV-XX
Average value (AVG)	110/220VAC	Relay (HI)	—	M4M1P-AV-XX
Average value (AVG)	110/220VAC	Relay (HI)	—	M4M1P-AA-5
Average value (AVG)				M4M1P-AA-XX
Root mean square value (RMS)				M4M1P-AAR-XX
—	110/220VAC	Relay (HI)	—	M4M1P-DI-XX
—	110/220VAC	Relay (HI, LOW)	—	M4M2P-DV-3
				M4M2P-DV-5
				M4M2P-DV-XX
Root mean square value (RMS)	110/220VAC	Relay (HI, LOW)	—	M4M2P-AVR-3
Root mean square value (RMS)				M4M2P-AVR-6
Average value (AVG)				M4M2P-AV-XX
—	110/220VAC	Relay (HI, LOW)	—	M4M2P-DA-5
Average value (AVG)	110/220VAC (24-70VDC, 100-240VAC)	Relay (HI, LOW)	—	M4M2P-AA-4
Average value (AVG)				M4M2P-AA-5
Root mean square value (RMS)				M4M2P-AAR-5
Average value (AVG)				M4M2P-AA-XX
—	110/220VAC	Relay (HI, LOW)	—	M4M2P-DI-XX

Tacho / Speed / Pulse Meters

Compact LCD Display Pulse Meter / Pulse Meter /

Series	Display Method	Character Height	Display Range	Measurement	Measurement Range	Input Method
Compact LCD Display Pulse Meter LR5N-B  W48×H24×L54mm	4½-digit 7-segment LCD	8.7mm	0 to 10000	Frequency, Revolutions	1 to 10000RPM, 0.1 to 1000.0RPM, 1 to 1000RPS, 1 to 1000Hz, 0.1 to 100.0Hz	Voltage input (PNP), No-voltage input (NPN)
Pulse Meter MP5S Series  W48×H48×L90mm	5-digit 7-segment LED	8mm	-19999 to 99999	16 operation modes: Frequency, Revolutions, Speed, Cycle, Time, Ratio, Density, Error, Length measurement, Interval, Accumulation, Addition/Subtraction, etc.	0.0005Hz to 50kHz, 0.01 to max. of each time range, 0 to 99999, -19999 to 99999	Voltage input (PNP), No-voltage input (NPN)
Pulse Meter MP5Y Series ※1  W72×H36×L100mm	5-digit 7-segment LED	14mm	-19999 to 99999	16 operation modes: Frequency, Revolutions, Speed, Cycle, Time, Ratio, Density, Error, Length measurement, Interval, Accumulation, Addition/Subtraction, etc.	0.0005Hz to 50kHz, 0.01 to max. of each time range, 0 to 99999, -19999 to 99999	Voltage input (PNP), No-voltage input (NPN)
Pulse Meter MP5W Series ※1  W96×H48×L100mm	5-digit 7-segment LED	14mm	-19999 to 99999	16 operation modes: Frequency, Revolutions, Speed, Cycle, Time, Ratio, Density, Error, Length measurement, Interval, Accumulation, Addition/Subtraction, etc.	0.0005Hz to 50kHz, 0.01 to max. of each time range, 0 to 99999, -19999 to 99999	Voltage input (PNP), No-voltage input (NPN)
Thumbwheel Switch Setting Type Pulse Meter MP5M Series  W72×H72×L75mm	5-digit 7-segment LED	8mm	-19999 to 99999	14 operation modes: Frequency, Revolutions, Speed, Cycle, Time, Ratio, Density, Length measurement, Interval, Accumulation, Addition/Subtraction, etc.	0.0005Hz to 50kHz, 0.01 to max. of each time range, 0 to 99999, -19999 to 99999	Voltage input (PNP), No-voltage input (NPN)

※1. Rear size of MP5Y/MP5W is based on indicator model. In case of output model, rear size may be longer due to output Hirose connector or output terminal block.





※2. Sold separately: Hirose connector socket (HIF3BA-10D-2.54R)

※3. Sold separately: Hirose connector socket (HIF3BA-20D-2.54R)


Power Supply	External Power Supply	Output		Approval	Model
		Main Output (Comparative Value)	Sub Output (Display Value)		
Built-in battery (over 3 years)	—	Indicator	—	—	LR5N-B
24VAC, 24-48VDC	Max. 12VDC 80mA	Indicator	—	CE c RU us	MP5S-2N
100-240VAC	Max. 12VDC 80mA	Indicator	—	CE c RU us	MP5S-4N
24VAC, 24-48VDC	Max. 12VDC 80mA	Indicator	—	CE c RU us	MP5Y-2N
		NPN open collector (HH, H, GO, L, LL)	—		MP5Y-21 ^{*2}
		PNP open collector (HH, H, GO, L, LL)	—		MP5Y-22 ^{*2}
		—	BCD dynamic		MP5Y-23 ^{*2}
		—	PV transmission (DC0-20mA, DC4-20mA)		MP5Y-24 ^{*2}
		—	RS485 communication		MP5Y-25 ^{*2}
		Relay (H, GO, L)	—		MP5Y-26
100-240VAC	Max. 12VDC 80mA	Indicator	—	CE c RU us	MP5Y-4N
		NPN open collector (HH, H, GO, L, LL)	—		MP5Y-41 ^{*2}
		PNP open collector (HH, H, GO, L, LL)	—		MP5Y-42 ^{*2}
		—	BCD dynamic		MP5Y-43 ^{*2}
		—	PV transmission (DC0-20mA, DC4-20mA)		MP5Y-44 ^{*2}
		—	RS485 communication		MP5Y-45 ^{*2}
		Relay (H, GO, L)	—		MP5Y-46
24VAC, 24-48VDC	Max. 12VDC 80mA	Indicator	—	CE c RU us	MP5W-2N
		Relay (HH, H, GO, L, LL)	—		MP5W-2A
		Relay (H, GO, L)	—		MP5W-21
		NPN open collector (HH, H, GO, L, LL)	BCD dynamic		MP5W-22 ^{*3}
		NPN open collector (HH, H, GO, L, LL)	PV transmission (DC0-20mA, DC4-20mA)		MP5W-24 ^{*3}
		PNP open collector (HH, H, GO, L, LL)	PV transmission (DC0-20mA, DC4-20mA)		MP5W-25 ^{*3}
		NPN open collector (HH, H, GO, L, LL)	RS485 communication		MP5W-28 ^{*3}
		PNP open collector (HH, H, GO, L, LL)	RS485 communication		MP5W-29 ^{*3}
100-240VAC	Max. 12VDC 80mA	Indicator	—	CE c RU us	MP5W-4N
		Relay (HH, H, GO, L, LL)	—		MP5W-4A
		Relay (H, GO, L)	—		MP5W-41
		NPN open collector (HH, H, GO, L, LL)	BCD dynamic		MP5W-42 ^{*3}
		NPN open collector (HH, H, GO, L, LL)	PV transmission (DC0-20mA, DC4-20mA)		MP5W-44 ^{*3}
		PNP open collector (HH, H, GO, L, LL)	PV transmission (DC0-20mA, DC4-20mA)		MP5W-45 ^{*3}
		NPN open collector (HH, H, GO, L, LL)	RS485 communication		MP5W-48 ^{*3}
		PNP open collector (HH, H, GO, L, LL)	RS485 communication		MP5W-49 ^{*3}
24VAC, 24-48VDC	Max. 12VDC 80mA	Indicator	—	CE c RU us	MP5M-2N
		Relay (H)+NPN open collector	—		MP5M-21
		Relay (H, L)+NPN open collector	—		MP5M-22
100-240VAC	Max. 12VDC 80mA	Indicator	—	CE c RU us	MP5M-4N
		Relay (H)+NPN open collector	—		MP5M-41
		Relay (H, L)+NPN open collector	—		MP5M-42


Display Units


Intelligent Display Unit / 7-Segment Display Unit / 16-Segment Display Unit / Panel Mount Type 5-Digit Display Unit

Series	Input Method	Input Logic	Display Method	Display Color	Display Characters
Intelligent Display Unit DS/DA Series^{※1}					
<DS16>  W16xH24xL39.5mm	Serial input	Positive logic (PNP), Negative logic (NPN)	■: Type S: 7-segment LED A: 16-segment LED	Red	Displays 64 types of character and sign (0 to 9, A to Z, 27 signs, dot)
				Green	Displays 64 types of character and sign (0 to 9, A to Z, 27 signs, dot)
<DS22/DA22>  W20xH33xL31.5mm	Parallel (dynamic parallel 1/2) input	Positive logic (PNP), Negative logic (NPN)	■: Type S: 7-segment LED A: 16-segment LED	Red	Displays 64 types of character and sign (0 to 9, A to Z, 27 signs, dot)
				Green	Displays 64 types of character and sign (0 to 9, A to Z, 27 signs, dot)
<DS40/DA40>  W40xH60xL17mm	RS485 communication input	—	■: Type S: 7-segment LED A: 16-segment LED	Red	Displays 64 types of character and sign (0 to 9, A to Z, 27 signs, dot)
				Green	Displays 64 types of character and sign (0 to 9, A to Z, 27 signs, dot)
<DS60/DA60>  W60xH96xL17mm	Pt temperature sensor input (DPT100Ω, JPt100Ω)	—	7-segment LED	Red	-50°C to 400.0°C or -58.0 to 752.0°F (display accuracy ±5.0% F.S.)
	Pt temperature sensor input (DPT100Ω, JPt100Ω) +RS485 communication input	—	7-segment LED	Red	-50°C to 400.0°C or -58.0 to 752.0°F (display accuracy ±5.0% F.S.)
	RS485 communication input (synchronous time display type)	—	7-segment LED	Red	World local time 12/24hour (supports summer time)
				Green	World local time 12/24hour (supports summer time)

※1. Expansion units and Unit-display unit (DU16, DU22) are available to order separately.

7-Segment Display Unit D1SC-N					
 W72xH96xL25.7mm	Serial input or Parallel (static/dynamic parallel) input	Positive logic (PNP), Negative logic (NPN)	7-segment LED	Red	Decimal: 0 to 9, dot, minus Hexadecimal: 0 to 9, A to F, dot, minus (set by switch)

7-Segment Display Unit D1SA Series[※]					
 W20xH33xL54mm	Serial input or Parallel (static/dynamic parallel) input	Positive logic (PNP), Negative logic (NPN)	7-segment LED	Red	Decimal: 0 to 9, dot Hexadecimal: 0 to 9, A to F, dot (set by switch)
				Green	Decimal: 0 to 9, dot Hexadecimal: 0 to 9, A to F, dot (set by switch)

16-Segment Display Unit D1AA Series[※]					
 W20xH33xL54mm	Serial input or Parallel (static/dynamic parallel) input	Positive logic (PNP), Negative logic (NPN)	16-segment LED	Red	61 characters and symbols (0 to 9, A to Z, 24 symbols, dot)
				Green	61 characters and symbols (0 to 9, A to Z, 24 symbols, dot)

※Accessory: Connector (CT-10S)



Sold separately: Right/Left fixing caps (D1□A-RN: DAR(L)-R, D1□A-GN: DAR(L)-BL)

Character Size (mm)	Current Consumption	Max. Multi Connections	Power Supply	Approval	Model
W9xH16	Max. 20mA	24	12-24VDC	CE	DS16-RS
W11.2xH22.5	Max. 25mA				D■22-RS
W22.4xH40	Max. 55mA				D■40-RS
W33.6xH60	Max. 65mA				D■60-RS
W9xH16	Max. 15mA	24	12-24VDC	CE	DS16-GS
W11.2xH22.5	Max. 20mA				D■22-GS
W22.4xH40	Max. 40mA				D■40-GS
W33.6xH60	Max. 45mA				D■60-GS
W11.2xH22.5	Max. 25mA	Dynamic parallel 1 (4-bit): 6 Dynamic parallel 1 (6-bit): 4 Dynamic parallel 2 (6-bit): 24	12-24VDC	CE	D■22-RP
W22.4xH40	Max. 55mA				D■40-RP
W33.6xH60	Max. 65mA				D■60-RP
W11.2xH22.5	Max. 20mA	Dynamic parallel 1 (4-bit): 6 Dynamic parallel 1 (6-bit): 4 Dynamic parallel 2 (6-bit): 24	12-24VDC	CE	D■22-GP
W22.4xH40	Max. 40mA				D■40-GP
W33.6xH60	Max. 45mA				D■60-GP
W9xH16	Max. 20mA	24	12-24VDC	CE	DS16-RT
W11.2xH22.5	Max. 25mA				D■22-RT
W22.4xH40	Max. 55mA				D■40-RT
W33.6xH60	Max. 65mA				D■60-RT
W9xH16	Max. 15mA	24	12-24VDC	CE	DS16-GT
W11.2xH22.5	Max. 20mA				D■22-GT
W22.4xH40	Max. 40mA				D■40-GT
W33.6xH60	Max. 45mA				D■60-GT
W11.2xH22.5	Max. 40mA	4	12-24VDC	CE	DS22-RR
W22.4xH40	Max. 55mA				DS40-RR
W33.6xH60	Max. 65mA				DS60-RR
W22.4xH40	Max. 55mA	4	12-24VDC	CE	DS40-RRT
W33.6xH60	Max. 65mA				DS60-RRT
W11.2xH22.5	Max. 25mA	10	12-24VDC	CE	DS22-RC
W22.4xH40	Max. 55mA				DS40-RC
W33.6xH60	Max. 65mA				DS60-RC
W11.2xH22.5	Max. 20mA	10	12-24VDC	CE	DS22-GC
W22.4xH40	Max. 40mA				DS40-GC
W33.6xH60	Max. 45mA				DS60-GC

W32xH57	Max. 70mA	∞	12-24VDC	—	D1SC-N
W11xH22	Max. 35mA	∞	12-24VDC	—	D1SA-RN
W11xH22	Max. 35mA	∞	12-24VDC	—	D1SA-GN
W11xH22	Max. 32mA	∞	12-24VDC	—	D1AA-RN
W11xH22	Max. 32mA	∞	12-24VDC	—	D1AA-GN

Display Units

Intelligent Display Unit / 7-Segment Display Unit / 16-Segment Display Unit / Panel Mount Type 5-Digit Display Unit

Series	Input Method	Input Logic	Display Method	Display Color	Display Characters
Panel Mount Type 5-Digit Display Unit D5Y*  W72xH36xL91mm	Serial input or Parallel (static/dynamic parallel) input	Positive logic (PNP), Negative logic (NPN)	5-digit 7-segment LED	Red	4-digit: -9999 to 9999 5-digit: 0 to 99999 (set by switch)
Panel Mount Type 5-Digit Display Unit D5W Series*  W96xH48xL99.5mm	Serial input or Parallel (static/dynamic parallel) input	Positive logic (PNP), Negative logic (NPN)	5-digit 7-segment LED	Red	4-digit: -9999 to 9999 5-digit: 0 to 99999 (set by switch)

*Sold separately: Hirose connector socket (HIF3BA-26D-2.54R)

Character Size (mm)	Power Consumption	Power Supply	Approval	Model
W7xH14	Max. 1.1W	12-24VDC	—	D5Y-M
W7xH14	Max. 1.1W	12-24VDC	—	D5W-M
	Max. 2VA	110/220VAC	—	D5W-MX

Sensor Controllers

Multi, High Performance · General-Purpose Sensor Controller







Series	Input Logic	Number Of Connected Sensors	Power For External Sensor	Power Supply	Power Consumption
Multi, High Performance Sensor Controller PA10 Series  W38×H76×L82mm	NPN open collector	2 units	12VDC (approx. 200mA)	100-240VAC	Max.10VA
	NPN open collector & NPN universal	2 units	12VDC (approx. 200mA)	100-240VAC	Max. 10VA
	PNP open collector & PNP universal	2 units	12VDC (approx. 200mA)	100-240VAC	Max. 10VA
	NPN open collector & NPN universal	2 units	12VDC (approx. 200mA)	100-240VAC	Max. 10VA
	PNP open collector & PNP universal	2 units	12VDC (approx. 200mA)	100-240VAC	Max. 10VA
8-Pin Plug Type General-Purpose, Sensor Controller PA-12 Series  W50×H80×L70mm	NPN open collector & NPN universal / PNP open collector & PNP universal (set by switch)	1 unit	12VDC (approx. 50mA)	110/220VAC (set by switch)	Max. 4VA
	NPN open collector & NPN universal	1 unit	12VDC (approx. 30mA)	110/220VAC	Max. 4VA
	PNP open collector & PNP universal	1 unit	12VDC (approx. 30mA)	110/220VAC	Max. 4VA

※ Sold separately: 8-pin socket(PG-08, PS-08(N))

Input Operation	Operation Mode	Control Output	Ambient Temperature	Model
Input signal reverse, OR/AND, IN2 derivative action	11 (ON delay mode, OFF delay mode, one-shot delay mode, flicker mode, flicker one-shot mode, low-speed detection mode, high-speed detection mode, ON/OFF delay mode, normal mode, flip-flop mode, encoder mode)	Relay SPDT(1c): 1, NPN open collector: 2	-10 to 55°C	PA10-U
Input signal reverse, AND operation	—	Relay SPDT(1c): 1 NPN open collector: 1	-10 to 55°C	PA10-V
Input signal reverse, AND operation	—	Relay SPDT(1c): 1 NPN open collector: 1	-10 to 55°C	PA10-VP
Input signal reverse, Individual operation	—	Relay SPDT(1c): 2	-10 to 55°C	PA10-W
Input signal reverse, Individual operation	—	Relay SPDT(1c): 2	-10 to 55°C	PA10-WP
—	—	Relay SPDT(1c): 1	-10 to 50°C	PA-12
—	—	NPN open collector: 1	-10 to 50°C	PA-12-PG
—	—	PNP open collector: 1	-10 to 50°C	PA-12-PGP

Switching Mode Power Supplies

General-Purpose SMPS / DIN Rail Mount Type SMPS

Series	Output Power	Input Voltage	Permissible Voltage	Output		Mounting		
				Voltage	Current	DIN Rail	Using Bolts	
General-Purpose SMPS SPA Series <SPA-030/050>  W97xH40xL120mm <SPA-075/100>  W97xH42xL160mm	30W	100-240VAC	85-264VAC	5VDC	6A	—	●	
				12VDC	2.5A			
				24VDC	1.5A			
	50W	100-240VAC	85-264VAC	85-264VAC	5VDC	10A	—	●
					12VDC	4.2A		
					24VDC	2.1A		
	75W	100-120/200-240VAC	85-132/170-264VAC	85-132/170-264VAC	5VDC	15A	—	●
					12VDC	6.3A		
					24VDC	3.2A		
	100W	100-120/200-240VAC	100-132/190-264VAC	85-132/170-264VAC	5VDC	20A	—	●
					12VDC	8.5A		
					24VDC	4.2A		
DIN Rail Mount Type SMPS SPB Series <SPB-030> W30xH90xL90mm  <SPB-015> W22.5xH90xL90mm <SPB-120> W50xH115xL110mm  <SPB-060> W36xH100xL110mm <SPB-240>  W80xH115xL110mm	15W	100-240VAC	85-264VAC/120-370VDC	5VDC	3A	●	—	
	15.6W	100-240VAC	85-264VAC/120-370VDC	12VDC	1.3A	●	—	
				24VDC	0.65A	●	—	
	25W	100-240VAC	85-264VAC/120-370VDC	5VDC	5A	●	—	
	30W	100-240VAC	85-264VAC/120-370VDC	12VDC	2.5A	●	—	
	31.2W	100-240VAC	85-264VAC/120-370VDC	24VDC	1.3A	●	—	
	60W	100-240VAC	85-264VAC/120-370VDC	12VDC	5A	●	—	
				24VDC	2.5A	●	—	
	62.4W	100-240VAC	85-264VAC/120-370VDC	48VDC	1.3A	●	—	
	96W	100-240VAC	85-264VAC/120-370VDC	12VDC	8A	●	—	
	120W	100-240VAC	85-264VAC/120-370VDC	24VDC	5A	●	—	
				48VDC	2.5A	●	—	
	240W	100-240VAC	85-264VAC/120-370VDC	12VDC	20A	●	—	
				24VDC	10A	●	—	
				48VDC	5A	●	—	
DIN Rail Mount Type SMPS SP Series  W37.5xH75xL65mm	3W	100-240VAC	85-264VAC	5VDC	0.6A	●	●	
				12VDC	0.25A	●	●	
				24VDC	0.13A	●	●	

Protection							Approval	Model
Over-Current	Over-Voltage	Inrush Current	Output Short-Circuit	Output Low-Voltage Indicate	Power Factor Correction	Terminal Cover		
●	—	●	●	—	—	—	—	SPA-030-05
							CE	SPA-030-12
								SPA-030-24
●	—	●	●	—	—	—	—	SPA-050-05
							CE	SPA-050-12
								SPA-050-24
●	●	●	●	—	—	—	—	SPA-075-05
								SPA-075-12
								SPA-075-24
●	●	●	●	—	—	—	—	SPA-100-05
								SPA-100-12
								SPA-100-24
●	—	●	●	●	—	—	CE	SPB-015-05
●	—	●	●	●	—	—	CE	SPB-015-12
●	—	●	●	●	—	—	CE	SPB-015-24
●	—	●	●	●	—	—	CE	SPB-030-05
●	—	●	●	●	—	—	CE	SPB-030-12
●	—	●	●	●	—	—	CE	SPB-030-24
●	—	●	●	●	—	●	CE	SPB-060-12
●	—	●	●	●	—	●	CE	SPB-060-24
●	—	●	●	●	—	●	CE	SPB-060-48
●	●	●	●	●	●	●	CE	SPB-120-12
●	●	●	●	●	●	●	CE	SPB-120-24
●	●	●	●	●	●	●	CE	SPB-120-48
●	●	●	●	●	●	●	CE	SPB-240-12
●	●	●	●	●	●	●	CE	SPB-240-24
●	●	●	●	●	●	●	CE	SPB-240-48
●	—	—	●	—	—	—	—	SP-0305
●	—	—	●	—	—	—	—	SP-0312
●	—	—	●	—	—	—	—	SP-0324

CONTROLLER

Temperature Controllers

SSRs / Power Controllers

Counters

Timers

Panel Meters

Tacho / Speed / Pulse Meters

Display Units

Sensor Controllers


Switching Mode Power Supplies

Graphic / Logic Panels



Field Network Devices

Graphic / Logic Panels

4.4 inch, STN LCD (Mono) Graphic Panel / 5.7 inch, STN LCD (Mono) Graphic Panel /

Series	Display Specifications				Graphic Drawing Memory	Touch Method
	LCD Type	Resolution	Display Area	Color		
4.4 inch, STN LCD (Mono) Graphic Panel GP-S044 Series  W145×H75×L38mm	4.4 inch STN Blue Negative	240×80 pixel	112.8×37.6mm	MONO (blue, white)	512KB	Pressure sensitive type
5.7 inch, STN LCD (Mono) Graphic Panel GP-S057 Series  W156×H132×L35.5mm	5.7 inch STN Blue Negative	320×240 pixel	119×91mm	MONO (blue, white)	512KB	Pressure sensitive type
7 inch, TFT LCD (Color) Graphic Panel GP-S070 Series  W194×H134×L35mm	7 inch TFT Color LCD	800×480 pixel	152.4×91.44mm	16,777,216 colors	16MB	Pressure sensitive type

※1. Ethernet communication is available only for data upload/download of the dedicated software.

Series	Display Specifications				Graphic Drawing Memory	Touch Method	Control Performance			I/O Configuration
	LCD Type	Resolution	Display Area	Color			Program Capacity	Processing Time	Command	
4.4 inch, STN LCD (Mono) Logic Panel LP-S044 Series  W145×H75×L54.5mm	4.4 inch STN Blue Negative	240×80 pixel	112.8×37.6mm	MONO (blue, white)	384KB	Pressure sensitive type	8K steps	Average: 6 to 7μs/ steps	Basic command : 28 Application command : 220	NPN input : 16-point NPN output : 16-point
7 inch, TFT LCD (Color) Logic Panel LP-S070 Series  W194×H134×L35mm	7 inch TFT Color LCD	800×480 pixel	152.4×91.44mm	16,777,216 colors	16MB	Pressure sensitive type	8K steps	Average: 2μs/ steps	Basic command : 28 Application command : 233	NPN input : 16-point NPN output : 16-point


※1. Ethernet communication is available only for data upload/download of the dedicated software.

Interface					Power Supply	Protection Structure	Dedicated Software	Approval	Model
RS232C	RS422	USB (Host)	USB (Device)	Ethernet ^{※1}					
1	1	—	—	—	24VDC	IP65F (front panel)	GP Editor (drawing program)	CE	GP-S044-S1D0
2	—	—	—	—	24VDC	IP65F (front panel)	GP Editor (drawing program)	CE	GP-S044-S1D1
1	1	—	—	—	24VDC	IP65F (front panel)	GP Editor (drawing program)	CE	GP-S057-S1D0
2	—	—	—	—	24VDC	IP65F (front panel)	GP Editor (drawing program)	CE	GP-S057-S1D1
1	1	1	1	1	24VDC	IP65F (front panel)	GP Editor (drawing program)	CE	GP-S070-T9D6
2	—	1	1	1	24VDC	IP65F (front panel)	GP Editor (drawing program)	CE	GP-S070-T9D7


Interface					I/O Connector Type		Power Supply	Protection Structure	Dedicated Software	Approval	Model
RS232C	RS422	USB (Host)	USB (Device)	Ethernet ^{※1}	Terminal Block	Ribbon Cable					
1	1	—	—	—	●	—	24VDC	IP65F (front panel)	GP Editor (drawing program) SmartStudio (logic program)	CE	LP-S044-S1D0-C5T-A
					—	●					LP-S044-S1D0-C5R-A
2	—	—	—	—	●	—	24VDC	IP65F (front panel)	GP Editor (drawing program) SmartStudio (logic program)	CE	LP-S044-S1D1-C5T-A
					—	●					LP-S044-S1D1-C5R-A
1	1	1	1	1	●	—	24VDC	IP65F (front panel)	GP Editor (drawing program) SmartStudio (logic program)	CE	LP-S070-T9D6-C5T
					—	●					LP-S070-T9D6-C5R
2	—	1	1	1	●	—	24VDC	IP65F (front panel)	GP Editor (drawing program) SmartStudio (logic program)	CE	LP-S070-T9D7-C5T
					—	●					LP-S070-T9D7-C5R

Field Network Devices


DeviceNet Digital Remote I/O, Standard Terminal Block · Sensor Connector Type /
 USB ↔ RS485 · RS232C ↔ RS485 · USB ↔ Serial Converter


Series	Network	Type		Number Of I/Os	
		Digital	Analog	Input	Output
DeviceNet Digital Remote I/O Standard Terminal Block ARD-D Series  W105×H52×L38.5mm	DeviceNet	●	—	8-point (AC voltage)	—
				16-point (NPN)	—
				16-point (PNP)	—
	DeviceNet	●	—	—	8-point (relay)
				—	8-point (SSR)
				—	16-point (NPN)
				—	16-point (PNP)
	DeviceNet	●	—	8-point (NPN)	8-point (NPN)
				8-point (PNP)	8-point (PNP)

※1. Expansion units (ARD-D□□□E) of ARD-D Series (digital, terminal block type) are available to order separately.

























DeviceNet Digital Remote I/O Sensor Connector Type ARD-D Series  W26×H76×L54mm	DeviceNet	●	—	8-point (NPN)	—
				8-point (PNP)	—
	DeviceNet	●	—	—	8-point (NPN)
				—	8-point (PNP)

※2. Expansion units (ARX-D□□□-4S) of ARD-D Series (digital, sensor connector type) are available to order separately.

DeviceNet Analog Remote I/O Standard Terminal Block ARD-A Series  W105×H52×L38.5mm	DeviceNet	—	●	4-CH (switchable DC voltage / current)	—
	DeviceNet	—	●	—	4-CH (DC voltage 2-CH, DC current 2-CH)




Modbus Digital Remote I/O Sensor Connector Type ARM Series  W26×H76×L54mm	Modbus	●	—	8-point (NPN)	—
				8-point (PNP)	—
	Modbus	●	—	—	8-point (NPN)
				—	8-point (PNP)




※3. Expansion units (ARX-D□□□-4S) of ARM Series (digital, sensor connector type) are available to order separately.

I/O Specifications	Structure	Power Supply	Protection Structure	Approval	Model
Voltage: 75-250VAC Current: 13mA/point	Basic unit*1	24VDC	IP20		ARD-DI08A
Voltage: 10-28VDC Current: 10mA/point				 	ARD-DI16N
Voltage: 10-28VDC Current: 10mA/point				 	ARD-DI16P
Normally open (N.O.) 250VAC 2A 1a	Basic unit*1	24VDC	IP20		ARD-DO08R
Voltage: 30-250VAC Current: 1A/point					ARD-DO08S
Voltage: 10-28VDC (voltage drop: max. 0.5V) Current: 0.5A/point (leakage current: max. 0.5mA)				 	ARD-DO16N
Voltage: 10-28VDC (voltage drop: max. 0.5V) Current: 0.5A/point (leakage current: max. 0.5mA)				 	ARD-DO16P
Voltage: 10-28VDC (voltage drop: max. 0.5V) Current: Input 10mA, Output 0.5A/point (leakage current: max. 0.5mA)	Basic unit*1	24VDC	IP20	 	ARD-DX16N
Voltage: 10-28VDC (voltage drop: max. 0.5V) Current: Input 10mA, Output 0.5A/point (leakage current: max. 0.5mA)				 	ARD-DX16P
Voltage: 10-28VDC Current: 10mA/point (sensor supplied current: 150mA/point)	Basic unit*2	24VDC	IP20	 	ARD-DI08N-4S
Voltage: 10-28VDC Current: 10mA/point (sensor supplied current: 150mA/point)					ARD-DI08P-4S
Voltage: 10-28VDC (voltage drop: max. 0.5V) Current: 0.3A/point (leakage current: max. 0.5mA)	Basic unit*2	24VDC	IP20	 	ARD-DO08N-4S
Voltage: 10-28VDC (voltage drop: max. 0.5V) Current: 0.3A/point (leakage current: max. 0.5mA)					ARD-DO08P-4S
Voltage: 0-10VDC, -10-10VDC, 0-5VDC, 1-5VDC, -5-5VDC (input impedance: max. 1MΩ) Current: DC4-20mA, DC0-20mA (input impedance: 250Ω)	Basic unit	24VDC	IP20	 	ARD-AI04
Voltage: 0-10VDC, -10-10VDC, 0-5VDC, 1-5VDC, -5-5VDC (load resistance: max. 1kΩ) Current: DC4-20mA, DC0-20mA (load resistance: 600Ω)	Basic unit	24VDC	IP20	 DeviceNet compatible	ARD-AO04
Voltage: 10-28VDC Current: 10mA/point (sensor supplied current: 150mA/point)	Basic unit*3	24VDC	IP20		ARM-DI08N-4S
Voltage: 10-28VDC Current: 10mA/point (sensor supplied current: 150mA/point)					ARM-DI08P-4S
Voltage: 10-28VDC (voltage drop: max. 0.5V) Current: 0.3A/point (leakage current: max. 0.5mA)	Basic unit*3	24VDC	IP20		ARM-DO08N-4S
Voltage: 10-28VDC (voltage drop: max. 0.5V) Current: 0.3A/point (leakage current: max. 0.5mA)					ARM-DO08P-4S

Field Network Devices

DeviceNet Digital Remote I/O, Standard Terminal Block · Sensor Connector Type /
 USB ↔ RS485 · RS232C ↔ RS485 · USB ↔ Serial Converter

Series	Converting Signal	Available Communication Distance	Insulation	
			Insulated	Non-Insulated
USB/RS485 Converter SCM-US48I  W39×H23.5×L75.5mm	USB ↔ RS485	USB: Max. 1m ± 30% RS485: Max. 1.2km	●	—
RS232C/RS485 Converter SCM-38I  W39×H23.5×L75.5mm	RS232C ↔ RS485	RS485: Max. 1.2km	●	—
USB/Serial Converter SCM-US  W52×H18×L8mm	USB ↔ Serial	1.5m (not extended)	—	●

Connection Method	Power Supply	Protection Structure	Approval	Model
USB: B type connector RS485: 4-wire screw terminal (2-wire communication method)	5VDC USB bus power	—	CE 	SCM-US48I
RS232C: D-sub 9-pin RS485: 4-wire screw terminal (2-wire communication method)	12-24VDC	—	CE 	SCM-38I
USB: A type connector Earphone-jack (4-stereo phone plug)	5VDC USB bus power	—	CE 	SCM-US



MOTION DEVICES

Stepper Motors · Stepper Motor Drivers · Motion Controllers

Stepper Motors

Frame Size 24mm-42mm-60mm-85mm-Shaft Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Shaft+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Geared+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 60mm Rotary Actuator+Built-in Brake Type-5-Phase Stepper Motor /

Series	Basic Step Angle [FULL/HALF]	Max. Holding Torque [kgf-cm]	Rotor Moment Of Inertia [g-cm ²]	Winding Resistance [Ω]	Rated Current [A/Phase]	
Frame Size 24mm, Shaft Type, 5-Phase Stepper Motor K Series 	0.72°/0.36°	0.18	4.2	1.1	0.75	
		0.28	8.2	1.7	0.75	
Frame Size 42mm, Shaft Type, 5-Phase Stepper Motor AK Series 	0.72°/0.36°	1.3	35	1.7	0.75	
						1.4
		1.8	54	2.2	0.75	
						1.4
		2.4	68	2.2	0.75	
						1.4

Motor Length [mm]	Shaft Type	Wire Connection	Protection Structure	Approval	Model
30.5	Single shaft	Pentagon	IP30	CE	02K-S523
	Dual shaft	Pentagon	IP30	CE	02K-S523W
46.5	Single shaft	Pentagon	IP30	CE	04K-S525
	Dual shaft	Pentagon	IP30	CE	04K-S525W
33	Single shaft	Pentagon	IP30	CE	A1K-S543
	Dual shaft	Pentagon	IP30	CE	A1K-S543W
	Single shaft	Standard	IP30	CE	A1K-S543-S
	Dual shaft	Standard	IP30	CE	A1K-S543W-S
33	Single shaft	Pentagon	IP30	CE	A1K-M543
	Dual shaft	Pentagon	IP30	CE	A1K-M543W
39	Single shaft	Pentagon	IP30	CE	A2K-S544
	Dual shaft	Pentagon	IP30	CE	A2K-S544W
	Single shaft	Standard	IP30	CE	A2K-S544-S
	Dual shaft	Standard	IP30	CE	A2K-S544W-S
39	Single shaft	Pentagon	IP30	CE	A2K-M544
	Dual shaft	Pentagon	IP30	CE	A2K-M544W
47	Single shaft	Pentagon	IP30	CE	A3K-S545
	Dual shaft	Pentagon	IP30	CE	A3K-S545W
	Single shaft	Standard	IP30	CE	A3K-S545-S
	Dual shaft	Standard	IP30	CE	A3K-S545W-S
47	Single shaft	Pentagon	IP30	CE	A3K-M545
	Dual shaft	Pentagon	IP30	CE	A3K-M545W

Stepper Motors



Frame Size 24mm-42mm-60mm-85mm-Shaft Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Shaft+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Geared+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 60mm Rotary Actuator+Built-in Brake Type-5-Phase Stepper Motor /




Series	Basic Step Angle [FULL/HALF]	Max. Holding Torque [kgf-cm]	Rotor Moment Of Inertia [g-cm ²]	Winding Resistance [Ω]	Rated Current [A/Phase]		
Frame Size 60mm, Shaft Type, 5-Phase Stepper Motor AK Series 	0.72°/0.36°	4.2	175	2.6	0.75		
				0.8	1.4		
				0.26	2.8		
		8.3	280	4	0.75		
				1.1	1.4		
				0.35	2.8		
		16.6	560	1.8	1.4		
				0.56	2.8		
		Frame Size 85mm, Shaft Type, 5-Phase Stepper Motor AK Series 	0.72°/0.36°	21	1400	1.76	1.4
						0.4	2.8
				41	2700	2.6	1.4
						0.58	2.8
63	4000			3.92	1.4		
				0.86	2.8		

Motor Length [mm]	Shaft Type	Wire Connection	Protection Structure	Approval	Model
48.5	Single shaft	Pentagon	IP30	CE	A4K-S564
	Dual shaft	Pentagon	IP30		A4K-S564W
	Single shaft	Standard	IP30	CE	A4K-S564-S
	Dual shaft	Standard	IP30		A4K-S564W-S
	Single shaft	Pentagon	IP30	CE	A4K-S564H
	Dual shaft	Pentagon	IP30		A4K-S564HW
48.5	Single shaft	Pentagon	IP30	CE	A4K-M564
	Dual shaft	Pentagon	IP30		A4K-M564W
	Single shaft	Standard	IP30	CE	A4K-M564-S
	Dual shaft	Standard	IP30		A4K-M564W-S
	Single shaft	Pentagon	IP30	CE	A4K-M564H
	Dual shaft	Pentagon	IP30		A4K-M564HW
48.5	Single shaft	Pentagon	IP30	CE	A4K-G564
	Dual shaft	Pentagon	IP30		A4K-G564W
59.5	Single shaft	Pentagon	IP30	CE	A8K-S566
	Dual shaft	Pentagon	IP30		A8K-S566W
	Single shaft	Standard	IP30	CE	A8K-S566-S
	Dual shaft	Standard	IP30		A8K-S566W-S
	Single shaft	Pentagon	IP30	CE	A8K-S566H
	Dual shaft	Pentagon	IP30		A8K-S566HW
59.5	Single shaft	Pentagon	IP30	CE	A8K-M566
	Dual shaft	Pentagon	IP30		A8K-M566W
	Single shaft	Standard	IP30	CE	A8K-M566-S
	Dual shaft	Standard	IP30		A8K-M566W-S
	Single shaft	Pentagon	IP30	CE	A8K-M566H
	Dual shaft	Pentagon	IP30		A8K-M566HW
59.5	Single shaft	Pentagon	IP30	CE	A8K-G566
	Dual shaft	Pentagon	IP30		A8K-G566W
89	Single shaft	Pentagon	IP30	CE	A16K-M569
	Dual shaft	Pentagon	IP30		A16K-M569W
	Single shaft	Standard	IP30	CE	A16K-M569-S
	Dual shaft	Standard	IP30		A16K-M569W-S
	Single shaft	Pentagon	IP30	CE	A16K-M569H
	Dual shaft	Pentagon	IP30		A16K-M569HW
89	Single shaft	Pentagon	IP30	CE	A16K-G569
	Dual shaft	Pentagon	IP30		A16K-G569W
	Single shaft	Standard	IP30	CE	A16K-G569-S
	Dual shaft	Standard	IP30		A16K-G569W-S
	Single shaft	Pentagon	IP30	CE	A16K-G569H
	Dual shaft	Pentagon	IP30		A16K-G569HW
68	Single shaft	Pentagon	IP30	CE	A21K-M596
	Dual shaft	Pentagon	IP30		A21K-M596W
	Single shaft	Standard	IP30	CE	A21K-M596-S
	Dual shaft	Standard	IP30		A21K-M596W-S
68	Single shaft	Pentagon	IP30	CE	A21K-G596
	Dual shaft	Pentagon	IP30		A21K-G596W
	Single shaft	Standard	IP30	CE	A21K-G596-S
	Dual shaft	Standard	IP30		A21K-G596W-S
98	Single shaft	Pentagon	IP30	CE	A41K-M599
	Dual shaft	Pentagon	IP30		A41K-M599W
	Single shaft	Standard	IP30	CE	A41K-M599-S
	Dual shaft	Standard	IP30		A41K-M599W-S
98	Single shaft	Pentagon	IP30	CE	A41K-G599
	Dual shaft	Pentagon	IP30		A41K-G599W
	Single shaft	Standard	IP30	CE	A41K-G599-S
	Dual shaft	Standard	IP30		A41K-G599W-S
128	Single shaft	Pentagon	IP30	CE	A63K-M5913
	Dual shaft	Pentagon	IP30		A63K-M5913W
	Single shaft	Standard	IP30	CE	A63K-M5913-S
	Dual shaft	Standard	IP30		A63K-M5913W-S
128	Single shaft	Pentagon	IP30	CE	A63K-G5913
	Dual shaft	Pentagon	IP30		A63K-G5913W
	Single shaft	Standard	IP30	CE	A63K-G5913-S
	Dual shaft	Standard	IP30		A63K-G5913W-S

Stepper Motors

Frame Size 24mm-42mm-60mm-85mm-Shaft Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Shaft+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Geared+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 60mm Rotary Actuator+Built-in Brake Type-5-Phase Stepper Motor /

Series	Basic Step Angle [FULL/HALF]	Max. Holding Torque [kgf-cm]	Rotor Moment Of Inertia [g-cm ²]	Winding Resistance [Ω]	Rated Current [A/Phase]
Frame Size 42mm, Hollow Shaft Type, 5-Phase Stepper Motor AHK Series 	0.72°/0.36°	1.3	35	1.7	0.75
		1.8	54	2.2	0.75
		2.4	68	2.2	0.75
Frame Size 60mm, Hollow Shaft Type, 5-Phase Stepper Motor AHK Series 	0.72°/0.36°	4.2	175	2.6	0.75
				0.8	1.4
		8.3	280	4	0.75
				1.1	1.4
		16.6	560	1.8	1.4
				0.56	2.8
Frame Size 85mm, Hollow Shaft Type, 5-Phase Stepper Motor AHK Series 	0.72°/0.36°	21	1400	1.76	1.4
				0.4	2.8
		41	2700	2.6	1.4
				0.58	2.8
		63	4000	3.92	1.4
				0.86	2.8








Series	Basic Step Angle [FULL/HALF]	Max. Holding Torque [kgf-cm]	Rotor Moment Of Inertia [g-cm ²]	Winding Resistance [Ω]	Rated Current [A/Phase]
Frame Size 42mm, Shaft+Built-in Brake Type, 5-Phase Stepper Motor AK-B Series 	0.72°/0.36°	1.3	35	1.7	0.75
		1.8	54	2.2	0.75
		2.4	68	2.2	0.75
Frame Size 60mm, Shaft+Built-in Brake Type, 5-Phase Stepper Motor AK-B Series 	0.72°/0.36°	4.2	175	2.6	0.75
				0.8	1.4
		8.3	280	4	0.75
				1.1	1.4
		16.6	560	1.8	1.4
				0.56	2.8
Frame Size 85mm, Shaft+Built-in Brake Type, 5-Phase Stepper Motor AK-B Series 	0.72°/0.36°	21	1400	1.76	1.4
				0.4	2.8
		41	2700	2.6	1.4
				0.58	2.8
		63	4000	3.92	1.4
				0.86	2.8

Motor Length [mm]	Shaft Type	Wire Connection	Protection Structure	Approval	Model
33	Single shaft	Pentagon	IP30	CE	AH1K-S543
39	Single shaft	Pentagon	IP30	CE	AH2K-S544
47	Single shaft	Pentagon	IP30	CE	AH3K-S545
48.5	Single shaft	Pentagon	IP30	CE	AH4K-S564
		Standard	IP30		AH4K-S564-S
48.5	Dual shaft	Pentagon	IP30	CE	AH4K-S564W
		Pentagon	IP30		AH4K-M564
48.5	Dual shaft	Pentagon	IP30	CE	AH4K-M564W
		Pentagon	IP30		AH8K-S566
59.5	Single shaft	Pentagon	IP30	CE	AH8K-S566W
		Pentagon	IP30		AH8K-M566
59.5	Dual shaft	Pentagon	IP30	CE	AH8K-M566W
		Pentagon	IP30		AH16K-M569
89	Single shaft	Pentagon	IP30	CE	AH16K-M569W
		Pentagon	IP30		AH16K-G569
89	Dual shaft	Pentagon	IP30	CE	AH16K-G569W
		Pentagon	IP30		AH21K-M596
68	Single shaft	Pentagon	IP30	CE	AH21K-M596W
		Pentagon	IP30		AH21K-G596
68	Dual shaft	Pentagon	IP30	CE	AH21K-G596W
		Pentagon	IP30		AH41K-M599
98	Single shaft	Pentagon	IP30	CE	AH41K-M599W
		Pentagon	IP30		AH41K-G599
98	Dual shaft	Pentagon	IP30	CE	AH41K-G599W
		Pentagon	IP30		AH63K-M5913
128	Single shaft	Pentagon	IP30	CE	AH63K-M5913W
		Pentagon	IP30		AH63K-G5913
128	Dual shaft	Pentagon	IP30	CE	AH63K-G5913W
		Pentagon	IP30		AH63K-M5913W

Motor Length [mm]	Shaft Type	Wire Connection	Protection Structure	Approval	Model
56	Single shaft	Pentagon	IP30	CE	A1K-S543-B
62	Single shaft	Pentagon	IP30	CE	A2K-S544-B
70	Single shaft	Pentagon	IP30	CE	A3K-S545-B
75	Single shaft	Pentagon	IP30	CE	A4K-S564-B
		Standard	IP30		A4K-S564-SB
75	Single shaft	Pentagon	IP30	CE	A4K-M564-B
		Standard	IP30		A4K-M564-SB
86	Single shaft	Pentagon	IP30	CE	A8K-S566-B
		Standard	IP30		A8K-S566-SB
86	Single shaft	Pentagon	IP30	CE	A8K-M566-B
		Standard	IP30		A8K-M566-SB
		Pentagon	IP30		A8K-M566H-B
115.5	Single shaft	Pentagon	IP30	CE	A16K-M569-B
		Standard	IP30		A16K-M569-SB
115.5	Single shaft	Pentagon	IP30	CE	A16K-G569-B
		Standard	IP30		A16K-G569-SB
103	Single shaft	Pentagon	IP30	CE	A21K-M596-B
		Standard	IP30		A21K-M596-SB
103	Single shaft	Pentagon	IP30	CE	A21K-G596-B
		Standard	IP30		A21K-G596-SB
133	Single shaft	Pentagon	IP30	CE	A41K-M599-B
		Standard	IP30		A41K-M599-SB
133	Single shaft	Pentagon	IP30	CE	A41K-G599-B
		Standard	IP30		A41K-G599-SB
163	Single shaft	Pentagon	IP30	CE	A63K-M5913-B
		Standard	IP30		A63K-M5913-SB
163	Single shaft	Pentagon	IP30	CE	A63K-G5913-B
		Standard	IP30		A63K-G5913-SB

Stepper Motors


Frame Size 24mm-42mm-60mm-85mm-Shaft Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Shaft+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Geared+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 60mm Rotary Actuator+Built-in Brake Type-5-Phase Stepper Motor /

Series	Basic Step Angle [FULL/HALF]	Max. Allowable Torque [kgf-cm]	Rotor Moment Of Inertia [g-cm ²]	Winding Resistance [Ω]	Rated Current [A/Phase]
Frame Size 42mm, Geared Type, 5-Phase Stepper Motor AK-G Series 	0.72°/0.36°	10	68	2.2	0.75
		15	68	2.2	0.75
Frame Size 60mm, Geared Type, 5-Phase Stepper Motor AK-G Series 	0.72°/0.36°	35	280	1.1	1.4
		40	280	1.1	1.4
		50	280	1.1	1.4
Frame Size 85mm, Shaft+Built-in Brake Type 5-Phase Stepper Motor AK-G Series 	0.72°/0.36°	140	2700	2.6	1.4
				0.58	2.8
		200	2700	2.6	1.4
				0.58	2.8
				2.6	1.4
				0.58	2.8
Frame Size 42mm, Geared+Built-in Brake Type, 5-Phase Stepper Motor AK-GB Series 	0.72°/0.36°	3	68	2.2	0.75
		10	68	2.2	0.75
		15	68	2.2	0.75
Frame Size 60mm, Geared+Built-in Brake Type, 5-Phase Stepper Motor AK-GB Series 	0.72°/0.36°	35	280	1.1	1.4
		40	280	1.1	1.4
		50	280	1.1	1.4
Frame Size 85mm, Geared+Built-in Brake Type, 5-Phase Stepper Motor AK-GB Series 	0.72°/0.36°	140	2700	2.6	1.4
				0.58	2.8
		200	2700	2.6	1.4
				0.58	2.8
				2.6	1.4
				0.58	2.8
Frame Size 60mm, Rotary Actuator Type, 5-Phase Stepper Motor AK-R Series 	0.72°/0.36°	35	280	1.1	1.4
		40	280	1.1	1.4
		50	280	1.1	1.4

Motor Length [mm]	Shaft Type	Gear Ratio	Wire Connection	Protection Structure	Approval	Model
74.5	Single shaft	1 : 5	Pentagon	IP30	CE	A10K-S545-G5
	Dual shaft	1 : 5	Pentagon	IP30	CE	A10K-S545W-G5
74.5	Single shaft	1 : 7.2	Pentagon	IP30	CE	A15K-S545-G7.2
	Dual shaft	1 : 7.2	Pentagon	IP30	CE	A15K-S545W-G7.2
	Single shaft	1 : 10	Pentagon	IP30	CE	A15K-S545-G10
	Dual shaft	1 : 10	Pentagon	IP30	CE	A15K-S545W-G10
94.5	Single shaft	1 : 5	Pentagon	IP30	CE	A35K-M566-G5
	Dual shaft	1 : 5	Pentagon	IP30	CE	A35K-M566W-G5
94.5	Single shaft	1 : 7.2	Pentagon	IP30	CE	A40K-M566-G7.2
	Dual shaft	1 : 7.2	Pentagon	IP30	CE	A40K-M566W-G7.2
94.5	Single shaft	1 : 10	Pentagon	IP30	CE	A50K-M566-G10
	Dual shaft	1 : 10	Pentagon	IP30	CE	A50K-M566W-G10
145	Single shaft	1 : 5	Pentagon	IP30	CE	A140K-M599-G5
	Dual shaft	1 : 5	Pentagon	IP30	CE	A140K-M599W-G5
145	Single shaft	1 : 5	Pentagon	IP30	CE	A140K-G599-G5
	Dual shaft	1 : 5	Pentagon	IP30	CE	A140K-G599W-G5
145	Single shaft	1 : 7.2	Pentagon	IP30	CE	A200K-M599-G7.2
	Dual shaft	1 : 7.2	Pentagon	IP30	CE	A200K-M599W-G7.2
145	Single shaft	1 : 7.2	Pentagon	IP30	CE	A200K-G599-G7.2
	Dual shaft	1 : 7.2	Pentagon	IP30	CE	A200K-G599W-G7.2
145	Single shaft	1 : 10	Pentagon	IP30	CE	A200K-M599-G10
	Dual shaft	1 : 10	Pentagon	IP30	CE	A200K-M599W-G10
145	Single shaft	1 : 10	Pentagon	IP30	CE	A200K-G599-G10
	Dual shaft	1 : 10	Pentagon	IP30	CE	A200K-G599W-G10
97.5	Single shaft	1 : 10	Pentagon	IP30	CE	A3K-S545-GB10
97.5	Single shaft	1 : 5	Pentagon	IP30	CE	A10K-S545-GB5
97.5	Single shaft	1 : 7.2	Pentagon	IP30	CE	A15K-S545-GB7.2
		1 : 10	Pentagon	IP30	CE	A15K-S545-GB10
121	Single shaft	1 : 5	Pentagon	IP30	CE	A35K-M566-GB5
121	Single shaft	1 : 7.2	Pentagon	IP30	CE	A40K-M566-GB7.2
121	Single shaft	1 : 10	Pentagon	IP30	CE	A50K-M566-GB10
180	Single shaft	1 : 5	Pentagon	IP30	CE	A140K-M599-GB5
180	Single shaft	1 : 5	Pentagon	IP30	CE	A140K-G599-GB5
180	Single shaft	1 : 7.2	Pentagon	IP30	CE	A200K-M599-GB7.2
180	Single shaft	1 : 7.2	Pentagon	IP30	CE	A200K-G599-GB7.2
180	Single shaft	1 : 10	Pentagon	IP30	CE	A200K-M599-GB10
180	Single shaft	1 : 10	Pentagon	IP30	CE	A200K-G599-GB10
93.5	Single shaft	1 : 5	Pentagon	IP30	CE	A35K-M566-R5
	Dual shaft	1 : 5	Pentagon	IP30	CE	A35K-M566W-R5
93.5	Single shaft	1 : 7.2	Pentagon	IP30	CE	A40K-M566-R7.2
	Dual shaft	1 : 7.2	Pentagon	IP30	CE	A40K-M566W-R7.2
93.5	Single shaft	1 : 10	Pentagon	IP30	CE	A50K-M566-R10
	Dual shaft	1 : 10	Pentagon	IP30	CE	A50K-M566W-R10

Stepper Motors

Frame Size 24mm-42mm-60mm-85mm-Shaft Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Shaft+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 42mm-60mm-85mm Geared+Built-in Brake Type-5-Phase Stepper Motor /
 Frame Size 60mm Rotary Actuator+Built-in Brake Type-5-Phase Stepper Motor /

Series	Basic Step Angle [FULL/HALF]	Max. Allowable Torque [kgf-cm]	Rotor Moment Of Inertia [g-cm ²]	Winding Resistance [Ω]	Rated Current [A/Phase]
Frame Size 60mm Rotary Actuator+ Built-in Brake Type, 5-Phase Stepper Motor AK-RB Series	 0.72°/0.36°	35	280	1.1	1.4
		40	280	1.1	1.4
		50	280	1.1	1.4

Motor Length [mm]	Shaft Type	Gear Ratio	Wire Connection	Protection Structure	Approval	Model
120	Single shaft	1 : 5	Pentagon	IP30	CE	A35K-M566-RB5
120	Single shaft	1 : 7.2	Pentagon	IP30	CE	A40K-M566-RB7.2
120	Single shaft	1 : 10	Pentagon	IP30	CE	A50K-M566-RB10

Stepper Motor Drivers

1.4A/Phase, DC Type, 5-Phase Stepper Motor Driver / 1.4A/Phase, AC Type, 5-Phase Stepper Motor Driver / 1.4A/Phase, DC Type, Multi-Axis Board Type, 5-Phase Stepper Motor Driver /

Series	Operation Method	Applied Motor	Resolution
1.4A/Phase, DC Type, 5-Phase Stepper Motor Driver MD5-HD14  W39.5xH105xL86mm	Bipolar constant current pentagon drive	5-phase stepper motor	FULL STEP (1-division), HALF STEP (2-division), Micro STEP (4, 5, 8, 10, 16, 20, 25, 40, 50, 80, 100, 125, 200, 250-division)
1.4A/Phase, AC Type, 5-Phase Stepper Motor Driver MD5-HF14 Series  W42xH170xL133.5mm	Bipolar constant current pentagon drive	5-phase stepper motor	FULL STEP (1-division), HALF STEP (2-division), Micro STEP (4, 5, 8, 10, 16, 20, 25, 40, 50, 80, 100, 125, 200, 250-division)
2.8A/Phase, AC Type, 5-Phase Stepper Motor Driver MD5-HF28  W49xH211.5xL146mm	Bipolar constant current pentagon drive	5-phase stepper motor	FULL STEP (1-division), HALF STEP (2-division), Micro STEP (4, 5, 8, 10, 16, 20, 25, 40, 50, 80, 100, 125, 200, 250-division)
1.5A/Phase, DC Type, 5-Phase Stepper Motor Driver MD5-ND14  W32xH93xL55.5mm	Bipolar constant current pentagon drive	5-phase stepper motor	FULL STEP (1-division), HALF STEP (2-division)

Power Supply	Max. Run Current [A/Phase]	Max. Current Consumption [A]	Output	Number Of Axes	Protection Structure	Approval	Model
20-35VDC	1.4	3	Zero point excitation	1-axis	—	CE	MD5-HD14
100-220VAC	1.4	3	Zero point excitation	1-axis	—	CE	MD5-HF14
			Alarm	1-axis	—	CE	MD5-HF14-AO
100-220VAC	2.8	5	Zero point excitation	1-axis	—	CE	MD5-HF28
20-35VDC	1.5	3	—	1-axis	—	CE	MD5-ND14

Stepper Motor Drivers

1.4A/Phase, DC Type, 5-Phase Stepper Motor Driver / 1.4A/Phase, AC Type, 5-Phase Stepper Motor Driver / 1.4A/Phase, DC Type, Multi-Axis Board Type, 5-Phase Stepper Motor Driver /




Series	Operation Method	Applied Motor	Resolution
1.4A/Phase, DC Type, Multi-Axis Board Type 5-Phase Stepper Motor Driver MD5-HD14-3X W40xH260xL80mm 	Bipolar constant current pentagon drive	5-phase stepper motor	FULL STEP (1-division), HALF STEP (2-division), Micro STEP (4, 5, 8, 10, 16, 20, 25, 40, 50, 80, 100, 125, 200, 250-division)
	Bipolar constant current pentagon drive	5-phase stepper motor	FULL STEP (1-division), HALF STEP (2-division), Micro STEP (4, 5, 8, 10, 16, 20, 25, 40, 50, 80, 100, 125, 200, 250-division)
Unipolar 2-Phase Stepper Motor Driver MD2U-MD20  W39.5xH105xL86mm	Unipolar constant current drive	2-phase stepper motor	FULL STEP (1-division), HALF STEP (2-division), Micro STEP (4, 5, 8, 10, 16, 20-division)
Intelligent Unipolar 2-Phase Stepper Motor Driver MD2U-ID20  W39.5xH105xL86mm	Unipolar constant current drive	2-phase stepper motor	Intelligent type ^{※1}

※1: Intelligent driver which is not required motion controller operates speed changing, AC motor drive characteristics, for stepper motor. The unit supports start/drive speed, acceleration/deceleration drive. Various functions are available by easy operation (Switch, Volume).

Power Supply	Max. Run Current [A/Phase]	Max. Current Consumption [A]	Output	Number Of Axes	Protection Structure	Approval	Model
20-35VDC	1.4	5	—	2-axis	—	CE	MD5-HD14-2X
20-35VDC	1.4	7	—	3-axis	—	CE	MD5-HD14-3X
			Zero point excitation	3-axis	—	CE	MD5-HD14-3X(Z OUT)
24-35VDC	2	3	—	1-axis	—	CE	MD2U-MD20
24-35VDC	2	3	—	1-axis	—	CE	MD2U-ID20

Motion Controllers

High-Speed, 1-Axis-2-Axis Motion Controller /

Series	Number Of Axes	Type	Main Features	Input/Output Contact	Interpolations	Operation Mode
High-Speed, 1-Axis-2-Axis Motion Controller PMC-1HS/2HS Series  W35.5xH90xL64mm	1-axis	Independent type	—	Parallel I/F: 13/4 X-axis: 8/5 (general: 0/1) Y-axis: 8/5 (general: 0/1)	—	INDEX, PROGRAM (64-step), JOG, CONTINUOUS
	2-axis	Independent type	—	Parallel I/F: 13/4 X-axis: 8/6 (general: 2/2) Y-axis: 8/6 (general: 2/2)	—	INDEX, PROGRAM (64-step), JOG, CONTINUOUS
※1: Connection port is RS232C or USB. Refer to the model name.						
General-Purpose, High-Speed, 2-Axis, Interpolation Type PMC-2HSN/2HSP Series  W35.5xH90xL64mm	2-axis	Independent type	S-shaped acceleration/ deceleration	Parallel I/F: 13/4 X-axis: 8/6 (general: 2/2) Y-axis: 8/6 (general: 2/2)	—	INDEX, PROGRAM (200-step), JOG, CONTINUOUS
					2-axis linear interpolation, circle interpolation, arc interpolation	INDEX, PROGRAM (200-step), JOG, CONTINUOUS
4-Axis, Board Type, Motion Controller PMC-4B-PCI  W174.6xH106.7mm	4-axis	Board type	S-shaped acceleration/ deceleration, Constant linear velocity, Synchronized operation	X, Y, Z, U-axis: 15/8 (general: 0/4)	2/3-axis linear interpolation, arc interpolation, 2/3-axis bit pattern interpolation, constant interpolation	User programming

In-Position Setting	Drive Speed	Connection	Communication Protocol	Applied Library	Power Supply	Approval	Model
ABSOLUTE, INCREMENTAL	1pps to 4Mpps	RS232C	Autonics protocol	—	24VDC	CE	PMC-1HS-232
		RS232C, USB	Autonics protocol	—	24VDC	CE	PMC-1HS-USB
ABSOLUTE, INCREMENTAL	1pps to 4Mpps	RS232C	Autonics protocol	—	24VDC	CE	PMC-2HS-232
		RS232C, USB	Autonics protocol	—	24VDC	CE	PMC-2HS-USB
ABSOLUTE, INCREMENTAL	1pps to 4Mpps	RS485	Modbus RTU	C programming language (provided DLL)	24VDC	CE	PMC-2HSN-485
		USB	Modbus RTU	C programming language (provided DLL)	24VDC	CE	PMC-2HSN-USB
ABSOLUTE, INCREMENTAL	1pps to 4Mpps	RS485	Modbus RTU	C programming language (provided DLL)	24VDC	CE	PMC-2HSP-485
		USB	Modbus RTU	C programming language (provided DLL)	24VDC	CE	PMC-2HSP-USB
ABSOLUTE, INCREMENTAL	1pps to 4Mpps	PCI Slot	PCI bus	C programming language (provided DLL), LabView	24VDC	CE	PMC-4B-PCI

Driving towards global leadership in the automation industry



11 150
Branches Distributors

Autonics global network, with 11 overseas operations and 150 distributors spanning over 80 countries, provides comprehensive automation solutions for users across the globe. To meet our goal of becoming a globally reputable company in the industrial automation market, our dedicated specialists are working day and night to meet and exceed global expectations.

Autonics

SELECTION GUIDE

Distributor

• Major Products

• Photoelectric Sensors · Fiber Optic Sensors · Door Sensors · Door Side Sensors · Area Sensors
• Proximity Sensors · Pressure Sensors · Connectors / Sockets · Rotary Encoders · Panel Meters
• Counters · Timers · Temperature Controllers · SSR / Power Controllers · Sensor Controllers
• Graphic / Logic Panels · Temperature / Humidity Transducers · Switching Mode Power Supplies
• Stepper Motors / Drivers / Motion Controllers · I/O Terminal Blocks & Cables · Display Units
• Control Switches / Lamps / Buzzers · Field Network Devices · Tachometer / Pulse (Rate) Meters
• Laser Marking System (Fiber, CO₂, Nd:YAG) · Laser Welding / Cutting System

※ The dimensions or specifications on this selection guide may change and some models may be discontinued without notice.

■ Corporate Headquarters

18 Bansong-ro, 513 Beon-gil, Haeundae-gu, Busan, South Korea 48002

■ Overseas Business Headquarters

#402-303, Bucheon Techno Park, 655, Pyeongcheon-ro, Wonmi-gu, Bucheon, Gyeonggi-do, South Korea 14502

Tel: 82-32-610-2730 / Fax: 82-32-329-0728 / E-mail: sales@autonics.com

■ Brazil - Autonics do Brasil Comercial Importadora Exportadora Ltda

Tel: 55-11-2307-8480 / Fax: 55-11-2309-7784 / E-mail: comercial@autonics.com.br

■ China - Autonics electronic(Jiaying) Corporation

Tel: 86-21-5422-5969 / Fax: 86-21-5422-5961 / E-mail: china@autonics.com

■ India - Autonics Automation India Private Limited

Tel: 91-22-2781-4305 / Fax: 91-22-2781-4518 / E-mail: india@autonics.com

■ Indonesia - PT, Autonics Indonesia

Tel: 62-21-8088-8814/5 / Fax: 62-21-8088-4442/0 / E-mail: indonesia@autonics.com

■ Japan - Autonics Japan Corporation

Tel: 81-3-3950-3111 / Fax: 81-3-3950-3191 / E-mail: ja@autonics.com

■ Malaysia - Mal-Autonics Sensor Sdn. Bhd.

Tel: 60-3-7805-7190 / Fax: 60-3-7805-7193 / E-mail: malaysia@autonics.com

■ Mexico - Autonics Mexico S.A. DE C.V

Tel: 52-55-5207-0019 / Fax: 52-55-1663-0712 / E-mail: ventas@autonics.com

■ Russia - Autonics Corp. Russia Representative Office

Tel/Fax: 7-495-660-10-88 / E-mail: russia@autonics.com

■ Turkey - Autonics Otomasyon Ticaret Ltd. Sti.

Tel: 90-216-365-9117/3/4 / Fax: 90-216-365-9112 / E-mail: infotr@autonics.com

■ USA - Autonics USA, Inc.

Tel: 1-847-680-8160 / Fax: 1-847-680-8155 / E-mail: sales@autonicsusa.net

■ Vietnam - Cong Ty TNHH Autonics Vina

Tel: 84-8-3771-2662 / Fax: 84-8-3771-2663 / E-mail: vietnam@autonics.com