

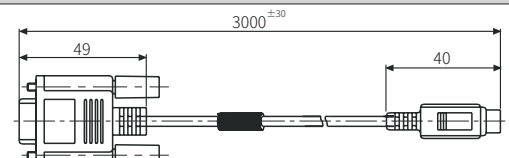


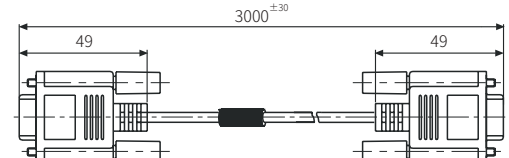


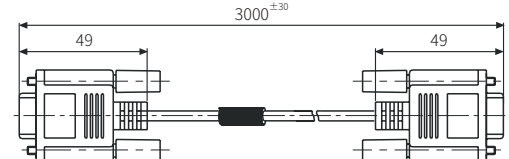

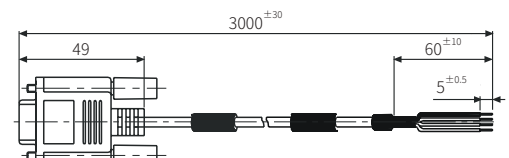

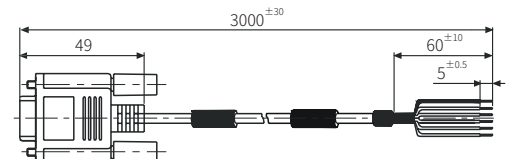


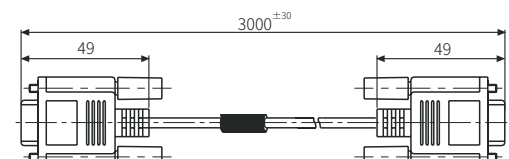


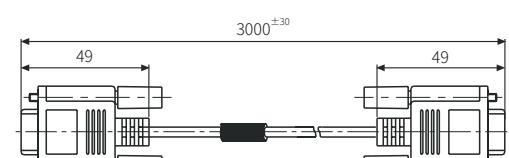


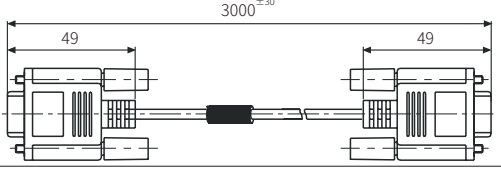


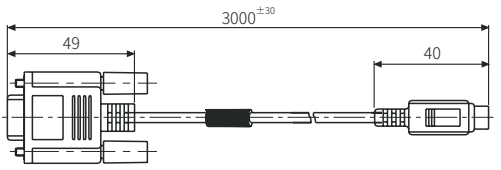


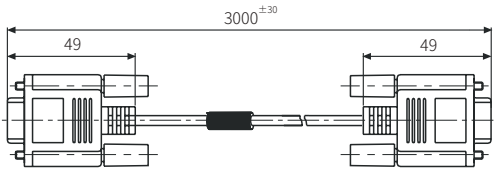


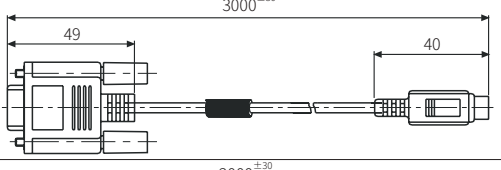

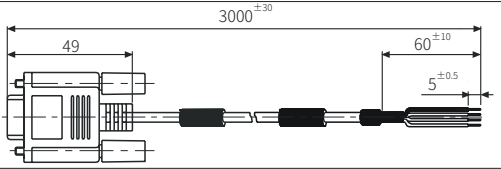


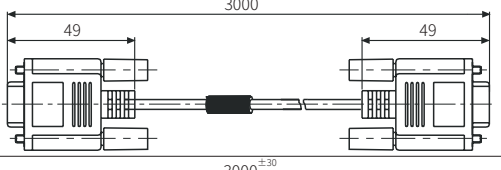

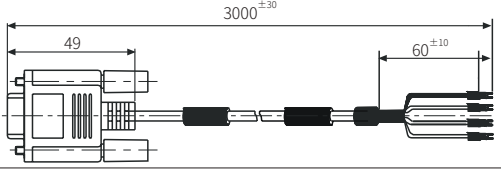

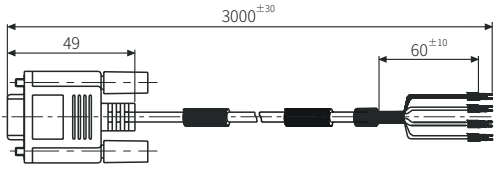

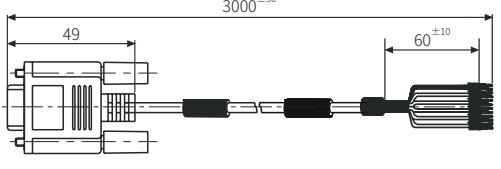


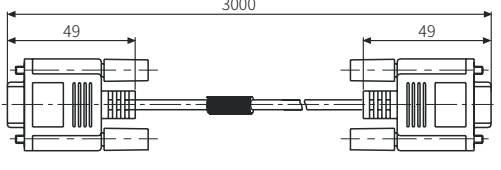




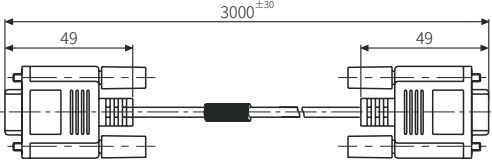


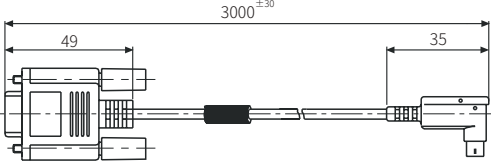
D-SUB Connector Communication Cable

D-SUB Connector Communication Cable

• Unit: mm, For the detailed drawings, follow the Autonics website.

No.	Model	HMI side	Connected device side	Dimension
1	C3M5P00-D9F0-M6M0	 <p>1 6 RXD② 2 7 TXD③ 3 8 4 9 SG⑤</p> <p>D-SUB 9-pin Female</p>	 <p>①RXD 5 ④TXD 3 ⑥SG 1</p> <p>Mini-Din 6-pin Male</p>	 <p>3000^{±30} 49 40</p>
2	C3M5P01-D9F0-D9M0	 <p>1 6 RXD② 2 7 TXD③ 3 8 4 9 SG⑤</p> <p>D-SUB 9-pin Female</p>	 <p>5 9 4 8 3 7 2 6 1</p> <p>D-SUB 9-pin Male</p>	 <p>3000^{±30} 49 49</p>
3	C3M5P02-D9F0-D9M0	 <p>1 6 RXD② 2 7 TXD③ 3 8 4 9 SG⑤</p> <p>D-SUB 9-pin Female</p>	 <p>5 9 4 8 3 7 2 6 1</p> <p>D-SUB 9-pin Male</p>	 <p>3000^{±30} 49 49</p>
4	C3M5P03-D9M0-W4*0	 <p>5 9 TXD+① 4 8 RXD+② 3 7 TXD-⑥ 2 6 RXD-⑦ 1 SG ⑤</p> <p>D-SUB 9-pin Male</p>	<p>485(+) Black 485(-) Brown SG Red F.G. F.G. Black shrink tube</p> <p>4-Wire</p>	 <p>3000^{±30} 49 60^{±10} 5^{±0.5}</p>
5	C3M5P04-D9M0-W6*0	 <p>5 9 TXD+① 4 8 TXD-⑥ 3 7 RXD+② 2 6 RXD-⑦ 1 SG ⑤</p> <p>D-SUB 9-pin Male</p>	<p>RDB Red RDA Black SDB Orange SDA Brown SG Green F.G. F.G. Black shrink tube</p> <p>6-Wire</p>	 <p>3000^{±30} 49 60^{±10} 5^{±0.5}</p>
6	C3M5P05-D9F0-D9M0	 <p>1 6 2 7 3 8 4 9 5</p> <p>D-SUB 9-pin Female</p>	 <p>②RXD 5 ③TXD 4 ⑤SG 3 ①CD 2 ⑦RTS 1 ⑧CTS ④DTR ⑥DSR</p> <p>D-SUB 9-pin Male</p>	 <p>3000^{±30} 49 49</p>
7	C3M5P06-D9F0-D15M0	 <p>1 6 RXD② 2 7 TXD③ 3 8 4 9 SG ⑤</p> <p>D-SUB 9-pin Female</p>	 <p>⑥RXD 8 ⑬TXD 7 ⑦SG 6 ⑭SG 5 ④SG 4 ⑭SG 3 ④SG 2 ④SG 1</p> <p>D-SUB 15-pin Male</p>	 <p>3000^{±30} 49 49</p>

No.	Model	HMI side	Connected device side	Dimension
8	C3M5P07-D9F0-D9M0	 <p>1 6 RXD② ← ②TXD 5 9 2 7 TXD③ → ③RXD 4 8 3 8 SG ⑤ — ⑤SG 3 7 4 9 F.G. — F.G. 2 6 5</p> <p>D-SUB 9-pin Female</p>	 <p>5 9 4 8 3 7 2 6 1</p> <p>D-SUB 9-pin Male</p>	 <p>3000^{±30} 49 49</p>
9	C3M5P08-D9M0-M8M0	 <p>5 9 4 8 3 7 2 6 1</p> <p>D-SUB 9-pin Male</p>	 <p>TXD+① → ②RXD+ RXD+② ← ⑦TXD+ CTS+④ — ⑥RTS+ SG⑤ — ③SG TXD-⑥ → ①RXD- RXD-⑦ ← ④TXD- CTS-⑨ — ⑤RTS- F.G. — F.G.</p> <p>3 4 6 1 7 2 8 5</p> <p>Mini-Din 8-pin Male</p>	 <p>3000^{±30} 49 40</p>
10	C3M5P09-D9F0-D9F0	 <p>1 6 RXD② ← ②RXD 2 7 TXD③ → ③TXD 1 5 3 8 SG ⑤ — ⑤SG 2 6 4 9 ①CD 3 7 ④DTR 4 8 ⑥DSR 5 9 F.G. — F.G.</p> <p>D-SUB 9-pin Female</p>	 <p>1 6 2 7 3 8 4 9 5</p> <p>D-SUB 9-pin Female</p>	 <p>3000^{±30} 49 49</p>
11	C3M5P10-D9F0-M5M0	 <p>1 6 RXD② ← ④RXD 2 7 TXD③ → ②TXD 5 1 3 8 SG ⑤ — ③SG 4 2 4 9 F.G. — F.G. 3</p> <p>D-SUB 9-pin Female</p>	 <p>5 1 4 2 3</p> <p>Mini-Din 5-pin Male</p>	 <p>3000^{±30} 49 40</p>
12	C3M5P11-D9F0-W4*0	 <p>1 6 RXD② ← S Black 2 7 TXD③ → R Brown 3 8 SG ⑤ — G Red 4 9 F.G. — F.G. Black shrink tube 5</p> <p>D-SUB 9-pin Female</p>	<p>4-Wire</p>	 <p>3000^{±30} 49 60^{±10} 5^{±0.5}</p>
13	C3M5P12-D9F0-D9M1	 <p>1 6 2 7 3 8 4 9 5</p> <p>D-SUB 9-pin Female</p>	 <p>5 9 4 8 3 7 2 6 1</p> <p>D-SUB 9-pin Male</p> <p>Connection between the same number</p>	 <p>3000^{±30} 49 49</p>
14	C3M5P13-D9F0-T4Y0	 <p>1 6 RXD② ← ⑪SD Black 2 7 TXD③ → ⑫RD Brown 3 8 SG ⑤ — ⑬SG Red 4 9 F.G. — F.G. Black shrink tube 5</p> <p>D-SUB 9-pin Female</p>	<p>4Y Terminal</p>	 <p>3000^{±30} 49 60^{±10}</p>
15	C3M5P03-D9M0-T4Y0	 <p>5 9 TXD+① — 485(+) Black 4 8 RXD+② — 485(-) Brown 3 7 RXD-⑦ — SG Red 2 6 SG ⑤ — F.G. Black shrink tube 1</p> <p>D-SUB 9-pin Male</p>	<p>4Y Terminal</p>	 <p>3000^{±30} 49 60^{±10}</p>
16	C3M5P04-D9M0-T6Y0	 <p>5 9 TXD+① → RDB Red 4 8 TXD-⑥ → RDA Black 3 7 RXD+② → SDB Orange 2 6 RXD-⑦ → SDA Brown 1 SG ⑤ — SG Green F.G. — F.G. Black shrink tube</p> <p>D-SUB 9-pin Male</p>	<p>6Y Terminal</p>	 <p>3000^{±30} 49 60^{±10}</p>
17	C3M5P14-D9F0-D9F0	 <p>1 6 DTR① ← ⑥DSR ④ ④DTR DSR⑥ ← ① RXD② → ②RXD TXD③ → ③TXD ⑦ ⑦ ⑧ ⑧ SG ⑤ — ⑤SG F.G. — F.G.</p> <p>D-SUB 9-pin Female</p>	 <p>1 6 2 7 3 8 4 9 5</p> <p>D-SUB 9-pin Female</p>	 <p>3000^{±30} 49 49</p>

No.	Model	HMI side	Connected device side	Dimension
18	C3M5P15-D9M0-D9M0	 <p>TXD+① → ⑦RXD- TXD-⑥ → ②RXD+ RXD+② → ⑥TXD- RXD-⑦ → ①TXD+ SG ⑤ — ⑤SG F.G. — F.G.</p> <p>D-SUB 9-pin Male</p>	 <p>D-SUB 9-pin Male</p>	 <p>3000^{±30} 49</p>
19	C3M5P08-D9M0-M8M1	 <p>TXD+① → ②RXD+ RXD+② ← ⑦TXD+ CTS+④ — ⑥RTS+ SG ⑤ — ③SG TXD-⑥ → ①RXD- RXD-⑦ ← ④TXD- CTS-⑨ — ⑤RTS- F.G. — F.G.</p> <p>D-SUB 9-pin Male</p>	 <p>Mini-Din 8-pin Male</p>	 <p>3000^{±30} 49 35</p>

Selection Guide

Manufacturer	Series	Model	Connecting module	Comm. method	Cable no.	Comm. cable model
Autonics	TK	-	COM port	RS485	15	C3M5P03-D9M0-T4Y0
Autonics	TM	-	COM port	RS485	15	C3M5P03-D9M0-T4Y0
Autonics	TMH	TMH2	CPU	RS485	15	C3M5P03-D9M0-T4Y0
Autonics	TMH	TMH4	CPU	RS422	18	C3M5P15-D9M0-D9M0
Autonics	TMH	TMHC-22LE	Comm. module	RS485	15	C3M5P03-D9M0-T4Y0
Autonics	TMH	TMHC-23LE	Comm. module	RS422	18	C3M5P15-D9M0-D9M0
Autonics	THZ	-	COM port	RS485	15	C3M5P03-D9M0-T4Y0
Autonics	THD	-	COM port	RS485	4	C3M5P03-D9M0-W4*0
Autonics	CT	-	COM port	RS485	15	C3M5P03-D9M0-T4Y0
Autonics	MT	-	COM port	RS485	4	C3M5P03-D9M0-W4*0
Autonics	MP	-	COM port	RS485	4	C3M5P03-D9M0-W4*0
Autonics	DS/DA	-	COM port	RS485	4	C3M5P03-D9M0-W4*0
Autonics	ARM	-	COM port	RS485	4	C3M5P03-D9M0-W4*0
Autonics	LP-S044, LP-S070, LP-A070, LP-A104	-	CPU	RS232C	17	C3M5P14-D9F0-D9F0
Autonics	LP-S044, LP-S070, LP-A070, LP-A104	-	CPU	RS422	18	C3M5P15-D9M0-D9M0
Autonics	DPV	-	COM port	RS485	4	C3M5P03-D9M0-W4*0
Autonics	KRN1000	-	COM port	RS422	16	C3M5P04-D9M0-T6Y0
Autonics	KRN1000	-	COM port	RS485	16	C3M5P04-D9M0-T6Y0
Autonics	KRN100	-	COM port	RS485	4	C3M5P03-D9M0-W4*0
Autonics	KRN50	-	COM port	RS485	4	C3M5P03-D9M0-W4*0
LS	Master-K	MK-10S1	CPU	RS232C	1	C3M5P00-D9F0-M6M0
LS	Master-K	MK-80S	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	Master-K	MK-80S	Cnet module (G7L-CUEA)	RS232C	6	C3M5P05-D9F0-D9M0
LS	Master-K	MK-80S	Cnet module (G7L-CUEC)	RS422	16	C3M5P04-D9M0-T6Y0
LS	Master-K	MK-120S	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	Master-K	MK-120S	Cnet built-in CPU	RS232C	3	C3M5P02-D9F0-D9M0
LS	Master-K	MK-120S	Cnet built-in CPU	RS485	4	C3M5P03-D9M0-W4*0
LS	Master-K	MK-120S	Cnet module (G7L-CUEA)	RS232C	6	C3M5P05-D9F0-D9M0
LS	Master-K	MK-120S	Cnet module (G7L-CUEC)	RS422	16	C3M5P04-D9M0-T6Y0
LS	Master-K	MK-200S	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	Master-K	MK-200S	Cnet built-in CPU	RS232C	3	C3M5P02-D9F0-D9M0
LS	Master-K	MK-200S	Cnet built-in CPU	RS422	5	C3M5P04-D9M0-W6*0
LS	Master-K	MK-200S	Cnet built-in CPU	RS485	4	C3M5P03-D9M0-W4*0
LS	Master-K	MK-200S	Cnet module (G6L-CUEA)	RS232C	6	C3M5P05-D9F0-D9M0
LS	Master-K	MK-200S	Cnet module (G6L-CUEC)	RS422	16	C3M5P04-D9M0-T6Y0
LS	Master-K	MK-300S	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	Master-K	MK-300S	Cnet module (G4L-CUEA)	RS232C	6	C3M5P05-D9F0-D9M0
LS	Master-K	MK-300S	Cnet module (G4L-CUEA)	RS422	16	C3M5P04-D9M0-T6Y0
LS	Master-K	MK-1000S	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	Master-K	MK-1000S	Cnet module (G3L-CUEA)	RS232C	6	C3M5P05-D9F0-D9M0
LS	Master-K	MK-1000S	Cnet module (G3L-CUEA)	RS422	16	C3M5P04-D9M0-T6Y0
LS	XGT	XGK-CPUU	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGK-CPUH	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGK-CPUA	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGK-CPUS	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGK-CPUS	Cnet module (XGL-C22A)	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGK-CPUS	Cnet module (XGL-CH2A)	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGK-CPUS	Cnet module (XGL-CH2A)	RS422	16	C3M5P04-D9M0-T6Y0
LS	XGT	XGK-CPUS	Cnet module (XGL-C42A)	RS422	16	C3M5P04-D9M0-T6Y0
LS	XGT	XGK-CPUE	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGI-CPUU	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGI-CPUH	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGI-CPUS	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGI-CPUE	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	XGT	XGR-CPUH/T	CPU	RS232C	-	User made
LS	XGT	XGR-CPUH/F	CPU	RS232C	-	User made
LS	XGT	XGR-CPUH/S	CPU	RS232C	-	User made
LS	XGB	XEC(U)	CPU	RS232C	-	User made
LS	XGB	XEC(H)	CPU	RS232C	-	User made
LS	XGB	XEC(SU)	CPU	RS232C	-	User made
LS	XGB	XEC(E)	CPU	RS232C	-	User made
LS	XGB	XBM	Cnet built-in CPU	RS232C	14	C3M5P13-D9F0-T4Y0
LS	XGB	XBM	Cnet built-in CPU	RS485	15	C3M5P03-D9M0-T4Y0
LS	XGB	XBC	Cnet built-in CPU	RS232C	14	C3M5P13-D9F0-T4Y0
LS	XGB	XBC	Cnet built-in CPU	RS485	15	C3M5P03-D9M0-T4Y0
LS	Glofa	GM4	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	Glofa	GM6	CPU	RS232C	2	C3M5P01-D9F0-D9M0
LS	Glofa	GM7U	CPU	RS232C	2	C3M5P01-D9F0-D9M0
RS Automation (Samsung) OEMax	N70	-	CPU	RS232C	7	C3M5P06-D9F0-D15M0
RS Automation (Samsung) OEMax	N70Plus	-	CPU	RS232C	8	C3M5P07-D9F0-D9M0
RS Automation (Samsung) OEMax	NX7	-	CPU	RS232C	8	C3M5P07-D9F0-D9M0
RS Automation (Samsung) OEMax	NX70	-	CPU	RS232C	8	C3M5P07-D9F0-D9M0

Manufacturer	Series	Model	Connecting module	Comm. method	Cable no.	Comm. cable model
MITSUBISHI	FX	FX1S	CPU	RS422	9	C3M5P08-D9M0-M8M0
MITSUBISHI	FX	FX2S	RS232C module (FX1S-232-BD)	RS232C	10	C3M5P09-D9F0-D9F0
MITSUBISHI	FX	FX1N	CPU	RS422	9	C3M5P08-D9M0-M8M0
MITSUBISHI	FX	FX2N	RS232C module (FX1N-232-BD)	RS232C	10	C3M5P09-D9F0-D9F0
MITSUBISHI	FX	FX2NC	CPU	RS422	9	C3M5P08-D9M0-M8M0
MITSUBISHI	FX	FX2N	CPU	RS422	9	C3M5P08-D9M0-M8M0
MITSUBISHI	FX	FX3N	RS232C module (FX2N-232-BD)	RS232C	10	C3M5P09-D9F0-D9F0
MITSUBISHI	FX	FX2N-10GM	CPU	RS422	-	User made
MITSUBISHI	FX	FX2N-20GM	CPU	RS422	-	User made
MITSUBISHI	FX	FX3U	CPU	RS422	19	C3M5P08-D9M0-M8M1
MITSUBISHI	FX	FX3G	CPU	RS422	19	C3M5P08-D9M0-M8M1
MITSUBISHI	MELSEC-Q	Q00J	Cnet module (QJ71C24N)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q00J	Cnet module (QJ71C24N)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q00J	Cnet module (QJ71C24N-R2)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q00J	Cnet module (QJ71C24N-R4)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q00	Cnet module (QJ71C24N)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q00	Cnet module (QJ71C24N)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q00	Cnet module (QJ71C24N-R2)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q00	Cnet module (QJ71C24N-R4)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q01	Cnet module (QJ71C24N)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q01	Cnet module (QJ71C24N)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q01	Cnet module (QJ71C24N-R2)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q01	Cnet module (QJ71C24N-R4)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q02	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q02	Cnet module (QJ71C24N)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q02	Cnet module (QJ71C24N)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q02	Cnet module (QJ71C24N-R2)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q02	Cnet module (QJ71C24N-R4)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q02H	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q02H	Cnet module (QJ71C24N)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q02H	Cnet module (QJ71C24N)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q02H	Cnet module (QJ71C24N-R2)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q02H	Cnet module (QJ71C24N-R4)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q06H	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q06H	Cnet module (QJ71C24N)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q06H	Cnet module (QJ71C24N)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q06H	Cnet module (QJ71C24N-R2)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q06H	Cnet module (QJ71C24N-R4)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q12H	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q12H	Cnet module (QJ71C24N)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q12H	Cnet module (QJ71C24N)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q12H	Cnet module (QJ71C24N-R2)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q12H	Cnet module (QJ71C24N-R4)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q25H	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q25H	Cnet module (QJ71C24N)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q25H	Cnet module (QJ71C24N)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q25H	Cnet module (QJ71C24N-R2)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q25H	Cnet module (QJ71C24N-R4)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q25H	Cnet module (QJ71C24N)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q25H	Cnet module (QJ71C24N-R2)	RS232C	6	C3M5P05-D9F0-D9M0
MITSUBISHI	MELSEC-Q	Q25H	Cnet module (QJ71C24N-R4)	RS422	5	C3M5P04-D9M0-W6*0
MITSUBISHI	MELSEC-Q	Q00UJ	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q00U	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q01U	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q02U	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q03UD	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q04UDH	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q06UDH	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q10UDH	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q13UDH	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q20UDH	CPU	RS232C	-	C30R2 by MITSUBISHI
MITSUBISHI	MELSEC-Q	Q26UDH	CPU	RS232C	-	C30R2 by MITSUBISHI

Manufacturer	Series	Model	Connecting module	Comm. method	Cable no.	Comm. cable model
mitsubishi	MELSEC-Q	Q03UDVCPU	CPU	Ethernet	-	Common LAN cable
mitsubishi	MELSEC-Q	Q04UDVCPU	CPU	Ethernet	-	Common LAN cable
mitsubishi	MELSEC-Q	Q06UDVCPU	CPU	Ethernet	-	Common LAN cable
mitsubishi	MELSEC-Q	Q10UDVCPU	CPU	Ethernet	-	Common LAN cable
mitsubishi	MELSEC-Q	Q13UDVCPU	CPU	Ethernet	-	Common LAN cable
mitsubishi	MELSEC-Q	Q20UDVCPU	CPU	Ethernet	-	Common LAN cable
mitsubishi	MELSEC-Q	Q26UDVCPU	CPU	Ethernet	-	Common LAN cable
mitsubishi	MELSEC-Q	QJ71E71-100	Ethernet Comm. module	Ethernet	-	Common LAN cable
mitsubishi	MELSEC-Q	QJ71E71-B5	Ethernet Comm. module	Ethernet	-	Common LAN cable
mitsubishi	MELSEC-Q	QJ71E71-B2	Ethernet Comm. module	Ethernet	-	Common LAN cable
Panasonic NAIS	FP	FP0-C16	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0-C16	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0-C32	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0-C32	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0-T32C	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0-T32C	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FPG-C24R2	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FPG-C24R2	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FPG-C32T	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FPG-C32T	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FPG-C32T2	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FPG-C32T2	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0R-C10	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0R-C10	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0R-C14	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0R-C14	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0R-C16	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0R-C16	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0R-C32	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0R-C32	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0R-T32	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0R-T32	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0R-F32	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0R-F32	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0H-32ET	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0H-C32T	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP0H-C32T	CPU (Tool port)	RS232C	11	C3M5P10-D9F0-M5M0
Panasonic NAIS	FP	FP0H-C32T	CPU (COM port)	RS232C	12	C3M5P11-D9F0-W4*0
Panasonic NAIS	FP	FP7	CPU	Ethernet	-	Common LAN cable
Panasonic NAIS	FP	FP-SIGMA	Ethernet Comm. module	Ethernet	-	Common LAN cable
Panasonic NAIS	FP	FP0H	CPU	Ethernet	-	Common LAN cable
Panasonic NAIS	FP	FP2/FP2SH	Ethernet Comm. module	Ethernet	-	Common LAN cable
OMRON	SYSMAC C	CPM1A	CPU	RS232C	-	Communication with GP CQM1-CIF02 by OMRON
OMRON	SYSMAC C	CPM1A	CPU	RS232C	13	As extension cable C3M5P12-D9F0-D9M1
OMRON	SYSMAC CS	CS1H	CPU	RS232C	-	User made
OMRON	SYSMAC CS	CS1H	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CS	CS1H	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CS	CS1H	Ethernet Comm. module	Ethernet	-	Common LAN cable
OMRON	SYSMAC CS	CS1G	CPU	RS232C	-	User made
OMRON	SYSMAC CS	CS1G	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CS	CS1G	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CS	CS1G	Ethernet Comm. module	Ethernet	-	Common LAN cable
OMRON	SYSMAC CS	CS1D	CPU	RS232C	-	User made
OMRON	SYSMAC CS	CS1D	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CS	CS1D	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CS	CS1D	Ethernet Comm. module	Ethernet	-	Common LAN cable
OMRON	SYSMAC CJ	CJ2H	CPU	RS232C	-	User made
OMRON	SYSMAC CJ	CJ2H	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CJ	CJ2H	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CJ	CJ2H	Ethernet Comm. module	Ethernet	-	Common LAN cable
OMRON	SYSMAC CJ	CJ2M	CPU	RS232C	-	User made
OMRON	SYSMAC CJ	CJ2M	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CJ	CJ2M	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CJ	CJ2M	Ethernet Comm. module	Ethernet	-	Common LAN cable
OMRON	SYSMAC CJ	CJ1G	CPU	RS232C	-	User made
OMRON	SYSMAC CJ	CJ1G	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CJ	CJ1G	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CJ	CJ1G	Ethernet Comm. module	Ethernet	-	Common LAN cable

Manufacturer	Series	Model	Connecting module	Comm. method	Cable no.	Comm. cable model
OMRON	SYSMAC CJ	CJ1H	CPU	RS232C	-	User made
OMRON	SYSMAC CJ	CJ1H	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CJ	CJ1H	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CJ	CJ1H	Ethernet Comm. module	Ethernet	-	Common LAN cable
OMRON	SYSMAC CJ	CJ1M	CPU	RS232C	-	User made
OMRON	SYSMAC CJ	CJ1M	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CJ	CJ1M	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CJ	CJ1M	Ethernet Comm. module	Ethernet	-	Common LAN cable
OMRON	SYSMAC CP	CP1E	CPU	RS232C	-	User made
OMRON	SYSMAC CP	CP1E	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CP	CP1E	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CP	CP1H	CPU	RS232C	-	User made
OMRON	SYSMAC CP	CP1H	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CP	CP1H	Comm. module (Host Link)	RS422	-	User made
OMRON	SYSMAC CP	CP1H	Ethernet Comm. module	Ethernet	-	Common LAN cable
OMRON	SYSMAC CP	CP1L	CPU	RS232C	-	User made
OMRON	SYSMAC CP	CP1L	Comm. module (Host Link)	RS232C	-	User made
OMRON	SYSMAC CP	CP1L	Comm. module (Host Link)	RS422	-	User made
OMRON	E5AN	-	CPU	RS232C	14	C3M5P13-D9F0-T4Y0
OMRON	E5AN	-	CPU	RS485	15	C3M5P03-D9M0-T4Y0
OMRON	E5AR	-	CPU	RS485	15	C3M5P03-D9M0-T4Y0
OMRON	E5CN	-	CPU	RS485	15	C3M5P03-D9M0-T4Y0
OMRON	E5EN	-	CPU	RS232C	14	C3M5P13-D9F0-T4Y0
OMRON	E5EN	-	CPU	RS485	15	C3M5P03-D9M0-T4Y0
OMRON	E5ER	-	CPU	RS485	15	C3M5P03-D9M0-T4Y0
SIEMENS	SIMATIC S7-200	CPU221	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-200	CPU222	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-200	CPU224	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-200	CPU224XP	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-200	CPU224XPSi	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-200	CPU226	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-300	CPU312	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-300	CPU312C	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-300	CPU313C-2	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-300	CPU314	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-300	CPU314C-2	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-300	CPU315-2	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-300	CPU317-2	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-300	CPU319-3	CPU	RS485	-	Cable by SIEMENS
SIEMENS	SIMATIC S7-1200	CPU1211C	Comm. module CM1241RS422/485	RS485	-	User made
SIEMENS	SIMATIC S7-1200	CPU1212C	Comm. module CM1241RS422/485	RS485	-	User made
SIEMENS	SIMATIC S7-1200	CPU1214C	Comm. module CM1241RS422/485	RS485	-	User made
SIEMENS	SIMATIC S7-1200	CPU1215C	Comm. module CM1241RS422/485	RS485	-	User made
SIEMENS	SIMATIC S7-1200	CPU1217C	Comm. module CM1241RS422/485	RS485	-	User made
Rockwell Automation, Allen-Bradley	MicroLogix	MicroLogix 1000	CPU	RS485	-	Cable by Allen-Bradley
Rockwell Automation, Allen-Bradley	MicroLogix	MicroLogix 1200	CPU	RS485	-	Cable by Allen-Bradley
Rockwell Automation, Allen-Bradley	MicroLogix	MicroLogix 1500	CPU	RS485	-	Cable by Allen-Bradley
KDT (CIMON)	BP Series	-	CPU	RS232C	-	User made
KDT (CIMON)	CP Series	-	CPU	RS232C	-	User made
KDT (CIMON)	CP Series	-	CPU	RS485	-	User made
KDT (CIMON)	CP Series	-	Comm. module CM1-SC02A, CM1-SC01A	RS232C	-	User made
KDT (CIMON)	CP Series	-	Comm. module CM1-SC02A, CM1-SC01B	RS422	-	User made
KDT (CIMON)	CP Series	-	Comm. module CM1-SC02A, CM1-SC01B	RS485	-	User made
KDT (CIMON)	XP Series	-	CPU	RS232C	-	User made
KDT (CIMON)	XP Series	-	CPU	RS485	-	User made
KDT (CIMON)	XP Series	-	Comm. module CM1-SC02A, CM1-SC01A	RS232C	-	User made
KDT (CIMON)	XP Series	-	Comm. module CM1-SC02A, CM1-SC01B	RS422	-	User made
KDT (CIMON)	XP Series	-	Comm. module CM1-SC02A, CM1-SC01B	RS485	-	User made
DELTA	DTB Series	-	COM port	RS485	15	C3M5P03-D9M0-T4Y0
DANFOSS	FC200	-	COM port	RS485	15	C3M5P03-D9M0-T4Y0
GP firmware download cable	COMPUTER	-	-	RS232C	17	C3M5P14-D9F0-D9F0